

2017/2018

antal

new products



Winch XT80.3

p. 11



Square switches

p. 17



3 speed winches

p. 23



End stop control

p. 29



DV jammer

p. 42



2 speed tackle 4/8

p. 67



Mast block size 140

p. 86



Tulip foot block size 70

p. 88



Barber block

p. 95



Genoa car 32x6 Plus

p. 103



Outhaul slider size 280

p. 110



BB genoa car size 130

p. 119



BB main car size 260

p. 125



BB genoa car size 260

p. 127



Asymmetric batten slider

p. 143



Double slider for ring

p. 163



Double slider for soft-link

p. 163



T-Lock

p. 169



Deflector

p. 171

winches



clutches



blocks



“T” track sliders



ball bearing cars



full batten systems



soft link
accessories





winches



standard.....6



winch XT8



electric12



hydraulic18



maxi winch.....20



racing XT22



pedestal24



classic.....26



line-driver.....27




powered line driver ...28



handles30



winches: technical information




WINCH POWER AND MAXIMUM FORCE

To calculate the maximum force (F), first use the tables to find winch power (P). Assuming the efficiency is 70% and the maximum force exerted on the handle is 30 kg, the maximum force obtainable will be:


$F = 20 \times P$ (kg) i.e. twenty times the winch power.

For example, for a model with a winch power 50, the maximum force would be $F = 20 \times 50 = 1000$ Kg





RECOVERY SPEED

The recovery speed (S) is the length of line recovered with one turn of the handle. It is the converse of the winch power (P), and can be calculated using the formula: $S = 1600/P$ (mm) For example, a model with winch power 50 would have a recovery speed of $S = 1600/50 = 32$ mm for each 360° turn of the handle.

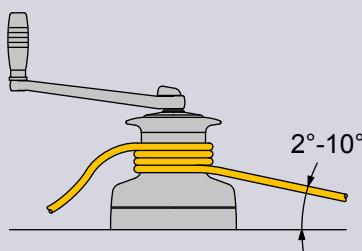

WINCH MOUNTING

Line drum lead angle: it is correct to provide an angle of between 2 and 10 degrees. It is advisable for the output gear of 2 speed models to be positioned with respect to pull direction, as shown in the figure (90°).



SPRING-LOADED SELF-TAILING

The new self-tailing winches with spring-loaded disks adapt automatically to even the thinnest lines. We recommend to put three or four wraps of line on the drum, otherwise excessive load on the self-tailing disks could cause the line to slip.



MAINTENANCE

Clean the winch by removing any old grease with a solvent (e.g. using diesel fuel). Spread a thin layer of marine grease (e.g. teflon grease) on all moving parts. Grease will protect aluminium from corrosion (where contact with dissimilar metal occurs). It is useful to use some grease especially on stainless steel screws, threads and stainless washers.

For a complete documentation ask for the "Winch User's Guide".


LUBRICATION

(Mod.TFL400) For winch and gear lubrication, use Type 400 (green) with Teflon. Antal can supply this grease in 150 gr tubes.

SPARE PARTS

Antal can supply you with a universal repair kit (mod. KITWINCHXT) suitable for all winch types, including 4 pawls and 4 pawl springs.

winch selection guide




MASTHEAD RIG

LOA up to (m)	7	8	9	10	11	12	13	14	15	16	18	21
LOA up to (ft)	23	26	30	33	36	39	43	46	49	53	60	70
GENOA (m²)	18	24	32	40	50	63	78	92	110	130	180	230
MAIN (m²)	12	14	16	18	23	29	35	42	52	65	80	100
SPIN (m²)	28	40	55	75	92	120	150	185	225	270	360	460

WINCH POWER

GENOA SHEET	8/16	16/30	30/40	40/44	44/48	52	62	66	66/70	70/80	70/80	80
MAIN SHEET	-	-	-	-	16	30	30/40	40	44	52	62	66
SPIN SHEET	7/8	8/16	16/30	30	40	44	48	48	52	62/66	66	70
GENOA HALYARD	7/8	8	16	30	30/40	40/44	44	44	48	52	62	66
MAIN HALYARD	7/8	8	16	30	40	44	44	44/48	48	52	62	66
SPIN HALYARD	7/8	8	16	16	30	40	44	44	48	52	62	66
TOPPING LIFT	-	-	8	8	16	30	30/40	40	44	48	52	62
FOREGUY	-	-	8	8	16	30	30/40	40	44	48	52	62
REEFING	-	8	8	16	30	40	40/44	40/44	48	52	62	66
VANG	-	-	-	8	8	16	30	30	40	44	52	62
RUNNERS	-	-	-	-	8	16	16	30/40	40	44	52	62



FRACTIONAL RIG

LOA up to (m)	7	8	9	10	11	12	13	14	15	16	18	21
LOA up to (ft)	23	26	30	33	36	39	43	46	49	53	60	70
GENOA (m²)	10	15	23	30	38	47	56	63	72	79	95	120
MAIN (m²)	14	17	24	32	40	49	57	65	75	82	100	130
SPIN (m²)	22	34	52	68	88	105	122	140	158	175	210	270

WINCH POWER

GENOA SHEET	8	16	30	40	44	48	52	62	62/66	70	66/70	80
MAIN SHEET	-	-	-	-	16	30	40	44	48	52	66	66
SPIN SHEET	7/8	8	16	30	40	40	44	44/48	48	62	66	66
GENOA HALYARD	7	8	16	16	30	40	44	44	48	52	62	66
MAIN HALYARD	7/8	8	16	30	30/40	40/44	44	48	48	52	62	66
SPIN HALYARD	7/8	8	16	16	30	40	40	44	48	48	62	62
TOPPING LIFT	-	-	8	8	16	16	30	40	44	44	48	52
FOREGUY	-	-	8	8	16	16	30	40	44	44	48	52
REEFING	-	8	16	16	30	40	40	44	48	52	62	66
VANG	-	-	-	8	16	30	30	40	44	44	52	62
RUNNERS	-	16	30	40	40/44	44	48	52	62	66	66	70

standard winches

Tod 33 - Jacopin

STANDARD WINCHES

There are three series of standard winches:
one direct speed winches, small and fast models for boats up to 6-7 m.

two speed winches, direct and reduced: medium size models for boats up to 9-10 m.

two reduced speed winches, medium-large size models for boats up to 12-13 m.



SNUBBING WINCH W5

Basic model, snubbing winch without handle, completely glass-fiber resin made.



Mod. W5

MODEL	W5
BASE (mm)	80
HEIGHT (mm)	66
WEIGHT (gr)	193
SCREWS N x Ø (mm)	4 x Ø 6

ONE DIRECT SPEED WINCHES W6 - W7 - W8

Turn the handle clockwise to engage the single direct gear; the handle turns freely counterclockwise.

Model **W6** is the smallest and lightest in the range, with a glass-fibre resin base and drum and an aluminium central rod.


Model **W7** is similar but with a hard black anodized aluminium drum.

Model **W8** has an AISI 316 stainless steel central rod, a bronze base and a black anodized aluminium (AL) or chrome-plated (CH) drum mounted on roller bearings.



Mod. W8 CH

Mod. W8 AL

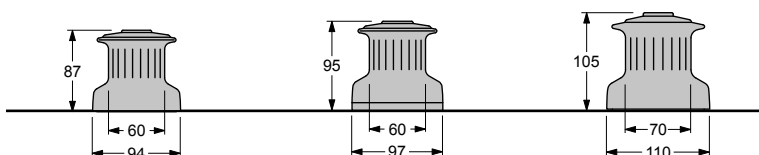

1 SPEED WINCHES

MODEL	W6	W7	W8
POWER P1	6.7	6.7	7.3
RECOVERY S1 (mm)	188	188	220
WEIGHT AL (kg)	0.43*	0.70	1.60
WEIGHT CH (kg)	-	-	2.10
SCREWS N x Ø (mm)	5 x Ø6	5 x Ø6	5 x Ø6

*Glass fibre resin drum. For mod. W6 and W7 winch power is calculated with short handle (L = 200 mm).




Mod. W42 AL

Mod. W42 CH

TWO SPEED WINCHES: DIRECT, REDUCED W16 - W30 - W42

The first speed is direct (one turn of the drum for each turn of the handle); the second speed is reduced: slower but more powerful. Bronze base and gears, AISI 316 stainless steel central rod and roller bearings, and black anodized aluminium (AL) or chrome-plated (CH) drums.

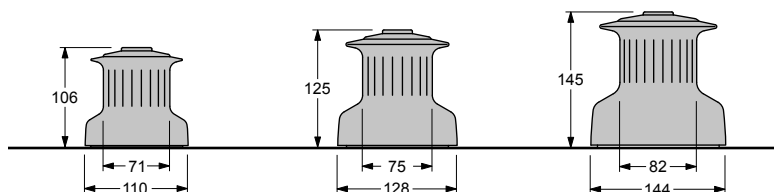

2 SPEED WINCHES

MODEL	W16	W30	W42
POWER P1-P2	7.3 / 14.5	7.0 / 28.0	6.4 / 42.5
RECOVERY S1-S2 (mm)	220 / 110	235 / 60	250 / 37
WEIGHT AL (kg)	2.00	2.80	4.10
WEIGHT CH (kg)	2.90	3.80	6.00
SCREWS N x Ø (mm)	5 x Ø6	5 x Ø6	5 x Ø8




Mod. W52 AL

Mod. W52 CH

TWO REDUCED SPEED WINCH W44 - W48 - W52

Quick and powerful operation is obtainable with the first reduced speed, then with increasing load, simply wind in the opposite direction the second gear and maximum power is automatically selected. Marine bronze is used for gears, AISI 316 stainless steel for central rod and roller bearings, CNC aluminium base, hard black anodized aluminium (AL) or chrome-plated (CH) drum.

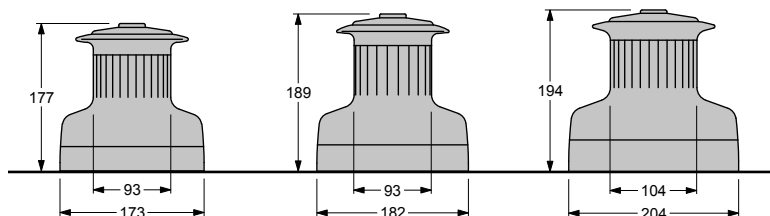


2 SPEED WINCHES

MODEL	W44	W48	W52
POWER P1-P2	20.0 / 43.0	19.0 / 47.4	14.9 / 51.1
RECOVERY S1-S2 (mm)	81 / 38	84 / 34	107 / 31
WEIGHT AL (kg)	5.50	6.30	7.80
WEIGHT CH (kg)	8.50	9.50	11.50
SCREWS N x Ø (mm)	6 x Ø8	6 x Ø8	6 x Ø8

P1,P2 : power with the first (fast) and second (slow) gear.

S1,S2 : recovery speed, the length of line recovered with one turn of the handle in first gear and in second gear.

XT winches

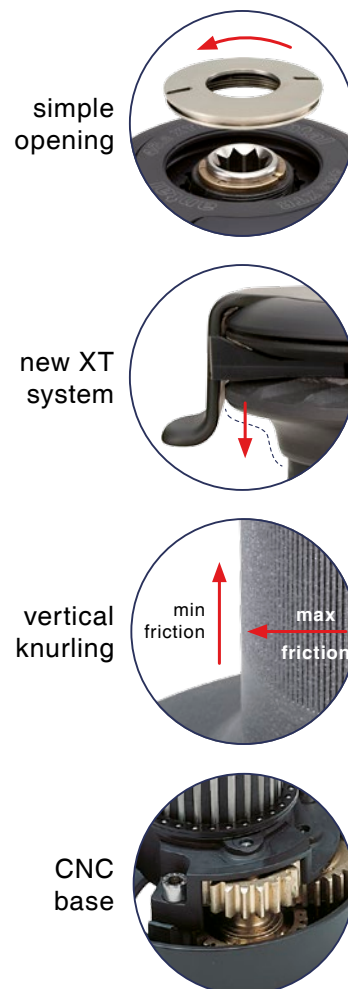

15 new self-tailing winches available in the following versions:

HARD BLACK ALUMINIUM (AL): the aluminium drum is hard black anodized and teflon coated, scratch-proof and very hard-wearing (page 10-11).

CHROME (CH): the drum, ST disks and ST arm are entirely chrome-plated. All chromed parts are highly polished, thickly nickel-plated and finally finished in chrome (pages 10-11).

RACE (R): racing series obtained by lightening the previous series AL (page 22).

CLASSIC (CHC and BNC): entirely made of chromed or natural bronze (page 26).

Moreover an electric and hydraulic powered series are also available. (page 12-18)

Antal winches have a three-year warranty.

SIMPLE OPENING: just unscrew the upper ring to immediately dismantle the winch for an easy


of cleaning and maintenance.

NEW SELF-TAILING XT SYSTEM: fixed upper disk with built in ST arm and self-regulating lower disk on springs. The new self-tailing adapts automatically to a wide range of rope diameters and, if overloading occurs, releases the line to avoid excess force on the ST arm.

KNURLING: the drum vertical knurling offers maximum horizontal friction allowing the rope "slide" upwards.

Differentiated grip (aluminium drums only): minimum friction on the lower part where loads are higher and maximum at the top where loads are minimal: the result is an even grip along the entire drum.

CNC BASE: machined by CNC (computer numeric control machines) is lighter and stronger than normal castings; aluminium made, hard black anodized and teflon coated. Easy removal from the winch makes maintenance a simple affair.

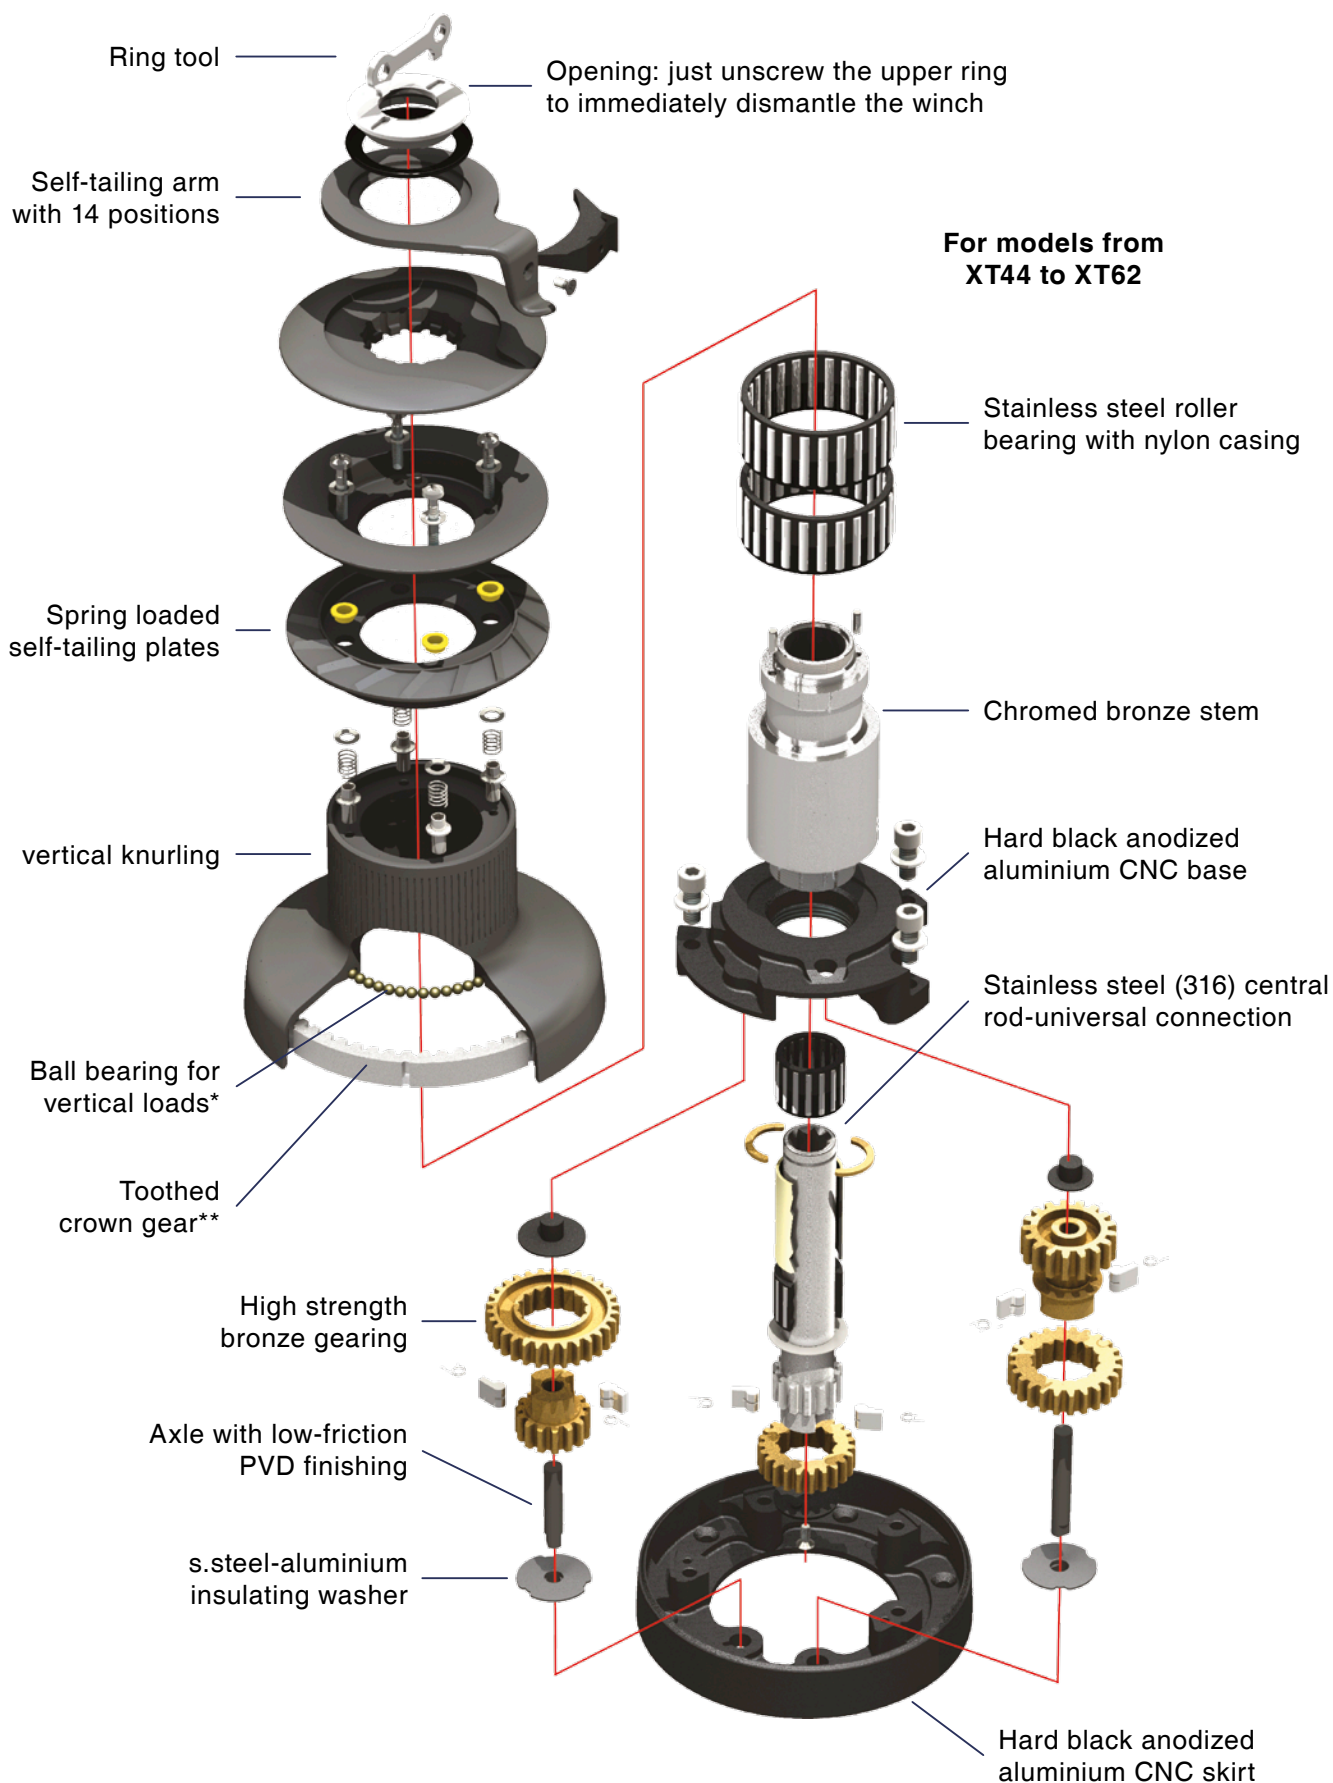

* ball bearing for vertical load: from model XT48, on smaller models it is replaced by a plastic washer.


** the aluminium drum fitted with a high strength alloy crown gear is provided on the following XT models: sizes 62, 66 and 70, all racing winches from size 40 to size 70, all electrical and hydraulic versions up to size 62. The electric and hydraulic versions of models XT66, XT70 and XT80 are fitted with AISI 316 s. steel crown gear.

self-tailing XT winches



ONE REDUCED SPEED WINCH XT16 - XT30

The two smallest models (XT16 and XT30) have a single reduced speed, giving a slow but powerful gear. The handle turns freely the other way. Both available in chrome (CH) or hard black alloy (AL).

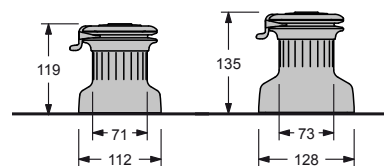

ONE SPEED WINCHES

MODEL	XT16	XT30
POWER P1	14	28
RECOVERY S1 (mm)	115	58
Ø LINE (mm)	6 / 10	6 / 10
WEIGHT AL (kg)	2.4	2.7
WEIGHT CH (kg)	3.1	3.8
SCREWS N x Ø (mm)	5 x Ø6	5 x Ø6

TWO SPEED WINCHES: DIRECT, REDUCED XT16.2 - XT30.2

The addition of a direct speed to the above described models gives a faster recovery gear, which, combined with reduced weight and an automatic self-tailing for very thin lines, makes these models the best choice for racing.


TWO SPEED WINCHES

MODEL	XT16.2	XT30.2
POWER P1-P2	7.0 / 14	7.0 / 28
RECOVERY S1-S2 (mm)	229 / 115	229 / 58
Ø LINE (mm)	6 / 10	6 / 10
WEIGHT AL (kg)	2.6	2.9
WEIGHT CH (kg)	3.0	3.7
SCREWS N x Ø (mm)	5 x Ø6	5 x Ø6



TWO REDUCED SPEED WINCHES XT40 - XT44 - XT48 - XT52 - XT62

Quick and powerful operation is obtainable with the first reduced speed, then with increasing load, simply wind in the opposite direction the second gear and maximum power is automatically selected.

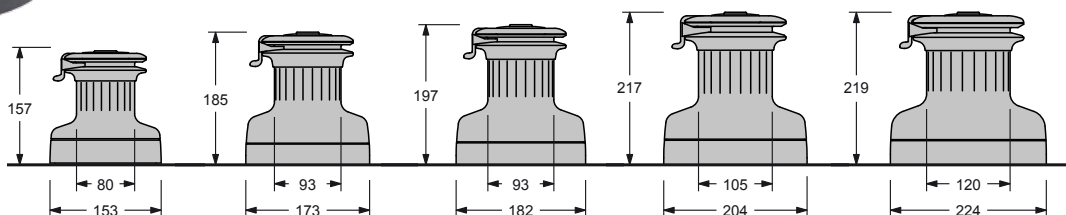

TWO SPEED WINCHES

MODEL	XT40	XT44	XT48	XT52	XT62
POWER P1-P2	12.8 / 40.0	20.0 / 43.0	19.0 / 47.4	15.9 / 52.8	17.8 / 62.1
RECOVERY S1-S2 (mm)	125 / 40	80 / 38	84 / 34	100 / 30	89 / 26
Ø LINE (mm)	6 / 12	8 / 14	8 / 14	8 / 14	8 / 16
WEIGHT AL (kg)	4.4	6.2	6.9	9.2	10.9
WEIGHT CH (kg)	5.9	8.7	9.9	13.0	15.7
SCREWS N x Ø (mm)	5 x Ø8	6 x Ø8	6 x Ø8	6 x Ø8	6 x Ø8

All these models (from size 40) can be powered with electric or hydraulic motors (page 12-17)




Mod. XT70/AL

Mod. XT70/CH

TWO REDUCED SPEED WINCHES XT66 - XT70

Large drum winches for 15-18 m boats. All the gears are fitted with roller bearings and the drum works on a very wide diameter roller-ball bearings.

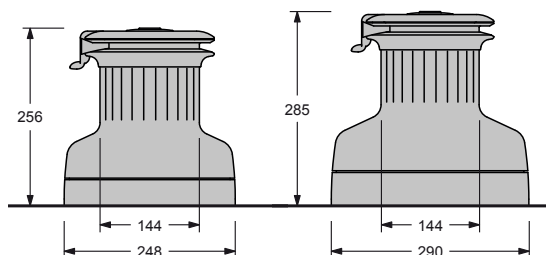

TWO SPEED WINCHES

MODEL	XT66	XT70
POWER P1-P2	18.0 / 65.6	27.1 / 69.8
RECOVERY S1-S2 (mm)	89 / 24	59 / 23
Ø LINE (mm)	10 / 18	10 / 18
WEIGHT AL (kg)	14.8	18.5
WEIGHT CH (kg)	24.6	30.0
SCREWS N x Ø (mm)	6 x Ø10	6 x Ø10




Mod. XT70.3/AL

Mod. XT70.3/CH

THREE REDUCED SPEED WINCHES XT62.3 - XT66.3 - XT70.3 - XT80.3

The push-button on the base starts the first gear (the fastest); second and third gear are automatically selected simply by reversing the rotation of the handle.

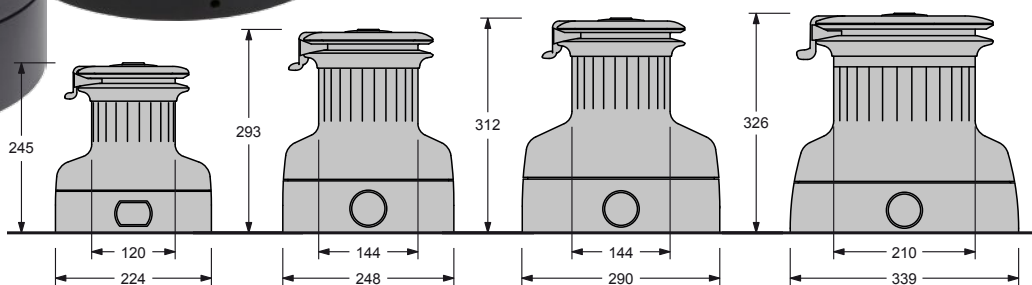

THREE SPEED WINCHES

MODEL	XT62.3	XT66.3	XT70.3	XT80.3
POWER P1-P2-P3	6.6 / 17.8 / 62.1	10.7 / 20.8 / 65.3	10.7 / 27.1 / 69.8	11.0 / 30.0 / 81.4
RECOVERY S1-S2-S3 (mm)	241 / 89 / 26	151 / 77 / 24	151 / 59 / 23	147 / 53 / 20
Ø LINE (mm)	8 / 16	10 / 18	10 / 18	12 / 20
WEIGHT AL (kg)	12.8	18.6	22.8	47.0
WEIGHT CH (kg)	17.6	28.4	34.4	52.0
SCREWS N x Ø (mm)	6 x Ø8	6 x Ø10	6 x Ø10	8 x Ø10

P1, P2, P3 : power with the first (fast), second (medium) and third (slow) gear.

S1, S2, S3 : recovery speed, the length of line recovered with one turn of the handle in first, second and third gear.

electric winches



ELECTRIC WINCHES

All Antal winch models, from XT40 to XT80.3, maxi W80.3ST and W90.3ST can be fitted with an electric motor.

All electric winches are available with a chromed drum, now also black aluminum drums with a reinforced crown gear (high resistance alloy or A316 s.steel) are available.

HORIZONTAL AND VERTICAL MOTORS

All the winches may be equipped with a horizontal motor and gearbox with a worm screw.

The largest models may be supplied with a vertical motor which uses a high-efficiency hypocycloid speed reducer.

Both solutions have been studied to ensure particularly compact dimensions and

maximum silent operation.

MANUAL USE

Simply insert the handle to disconnect the gearbox-motor unit.


Greater safety: accidental starting of the motor does not affect the winch, avoiding dangerous turning of the handle.

Greater efficiency: the gearbox-motor unit does not turn in manual use, avoiding needless friction.

SPEED

Electric winches maintain two speeds both in manual use (inverting the direction of rotation of the handle) and in electric use (pressing one of the two control buttons).

It is of fundamental importance to be able to choose the most suitable speed for the

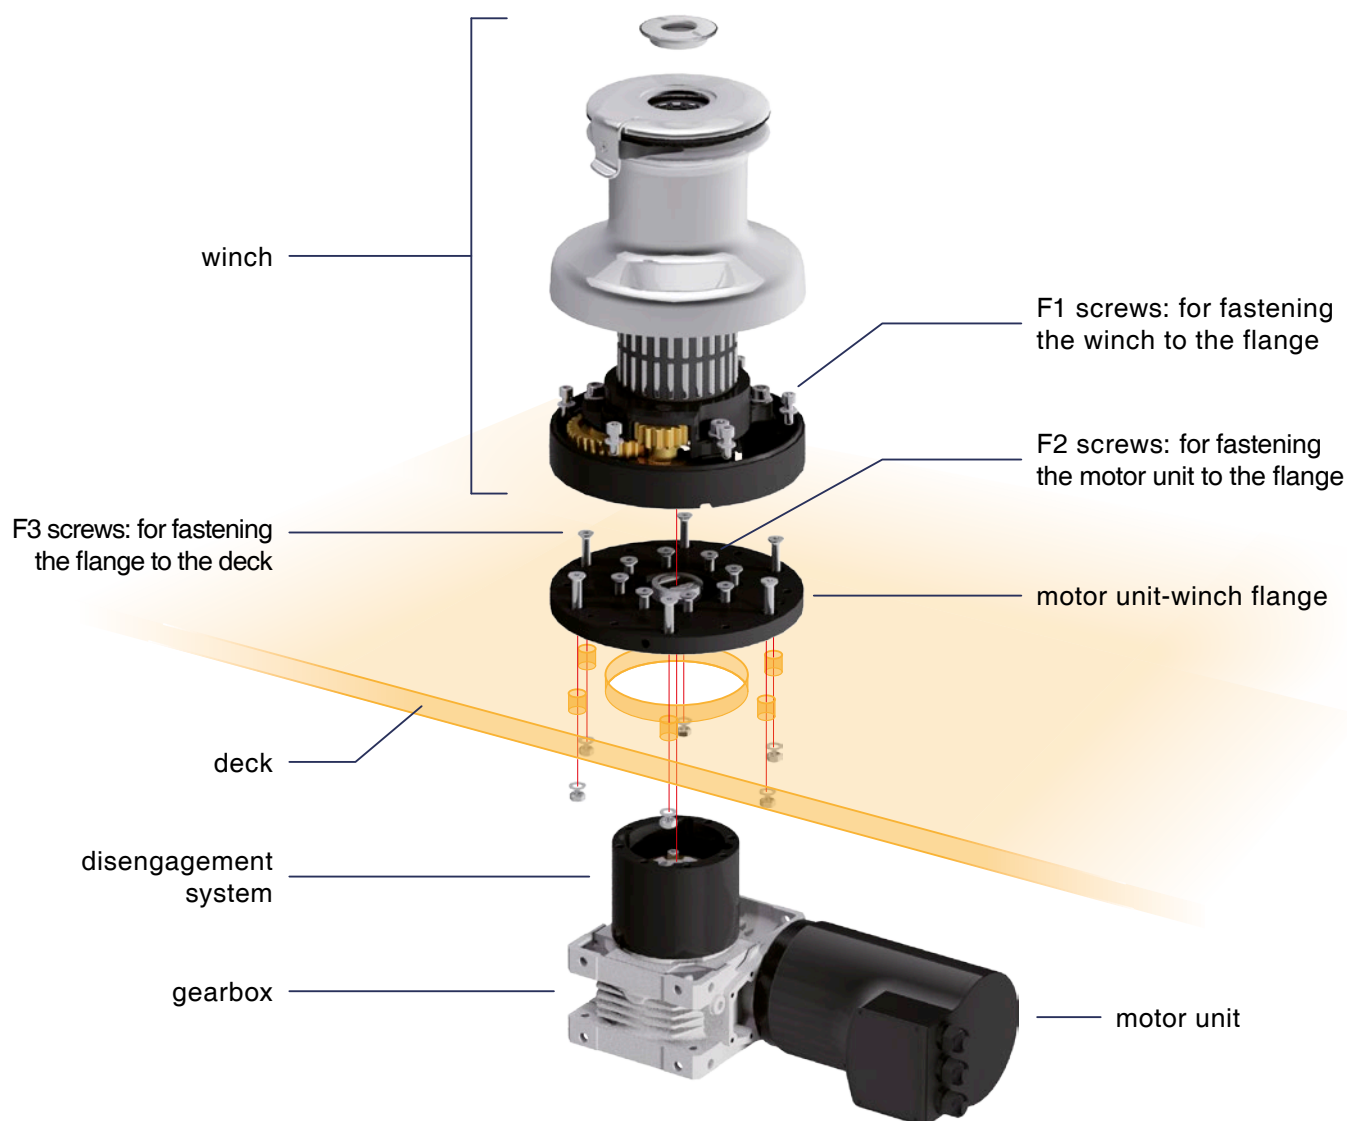

manoeuvre that you want to perform; this allows fast recovery of the first part of the manoeuvre and more careful regulation in the final stage.

In electric winches the speeds are higher than in manual use.

The recovery speed, indicated in the tables, is measured without a load; in the presence of the maximum load, a speed reduction of up to 30% must be considered.

All our electric winches are self tailing and come supplied with a chrome-plated drum. For more information on these winches see pages 10-11.




Electric winches are now available also in the standard aluminium version (/AL): in these models there is a highly resistant and harder toothed crown gear that guarantees efficiency and a long life for the winch mechanism.

electric winches



HORIZONTAL DRIVE - MOTOR 700 W 12/24 V XT40EH - XT44EH - XT48EH

The three models XT40, XT44 and XT48 are powered with a 700 Watt motor, available in 12 and 24 volt versions. Two switches, one control box and one breaker complete the system.

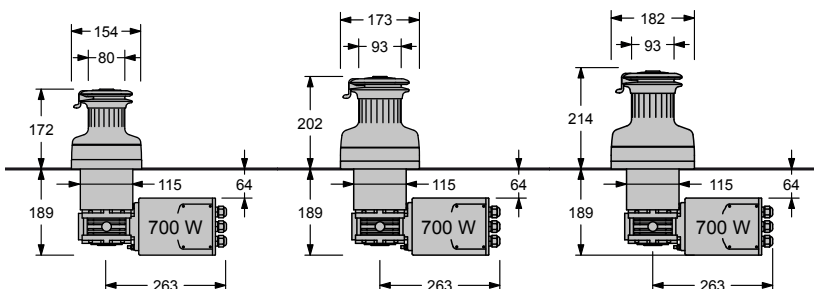


TWO SPEED WINCHES

MODEL	XT40EH	XT44EH	XT48EH
LINE SPEED 1 (m/min)	18.0	12.0	12.5
LINE SPEED 2 (m/min)	6.0	5.5	5.0
WORKING LOAD (kg)	800	900	1000
GLOBAL WEIGHT AL (kg)	16.2	18.2	19.1
GLOBAL WEIGHT CH (kg)	17.7	20.7	22.1



HORIZONTAL DRIVE - MOTOR 1000 W 12/24 V XT52EH - XT62EH - XT62.3EH

Models XT52, XT62 and XT62.3 are powered with a 1000 Watt, 12 or 24 Volt motor. Two switches, one control box and one breaker complete the system.

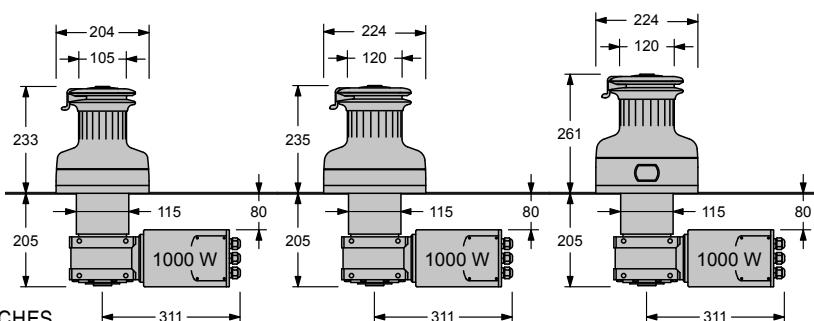

TWO OR THREE-SPEED WINCHES

MODEL	XT52EH	XT62EH	XT62.3EH
LINE SPEED 1 (m/min)	16.0	13.0	36.9
LINE SPEED 2 (m/min)	4.6	4.0	13.0
LINE SPEED 3 (m/min)	- - -	- - -	4.0
WORKING LOAD (kg)	1200	1400	1400
GLOBAL WEIGHT AL (kg)	26.3	28.3	30.2
GLOBAL WEIGHT CH (kg)	30.1	33.1	35.0

LINE SPEED: the recovery speed is calculated with the winch not under load; at maximum load the figure should be reduced by 30%.

MANUAL USE: the gearbox-motor unit is disengaged simply by inserting the handle.


CIRCUIT DIAGRAM: for the circuit diagram and accessories, such as switches, control boxes and breakers, see page 17.

All our electric winches are self-tailing and are available in both versions: with chrome-plated drum or with a reinforced black aluminium drum. For more information on these winches see pages 10-11.



HORIZONTAL DRIVE - MOTOR 1500 W 12/24 V XT66EH - XT70EH

Models XT66 and XT70 are powered with a 1500 Watt, 12 or 24 Volt motor. Two switches, one control box and one breaker complete the system.

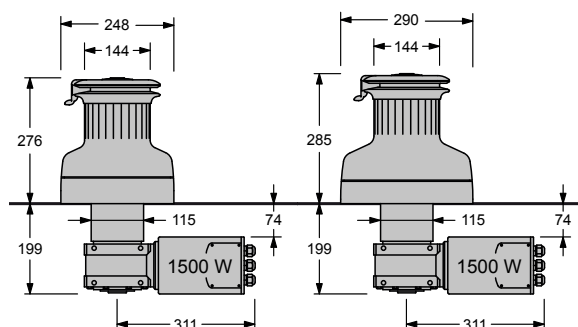

For the correct identification of the winch, add after the winch model in the tables the following:

- **12** or **24** for 12 or 24 Volt versions;
- **/AL** for black aluminium drum or **/CH** for chromed drum.

e.g.: XT66EH12/AL is an electric winch size 66 with horizontal drive 12V motor and with black aluminium drum.


TWO SPEED WINCHES

MODEL	XT66EH	XT70EH
LINE SPEED 1 (m/min)	13.0	9.0
LINE SPEED 2 (m/min)	3.6	3.5
WORKING LOAD (kg)	2600	2900
GLOBAL WEIGHT AL (kg)	31.9	35.9
GLOBAL WEIGHT CH (kg)	41.7	47.4



HORIZONTAL DRIVE - MOTOR 1500/2000 W 12/24 V XT66.3EH - XT70.3EH - XT80.3EH

These models maintain three speeds both in manual and in electric use; the push-button on the base starts the first gear (the fastest), second and third gear are automatically selected simply by reversing the rotation of the handle or pressing one of the two switches, one for the first and the third speed and one for the second.

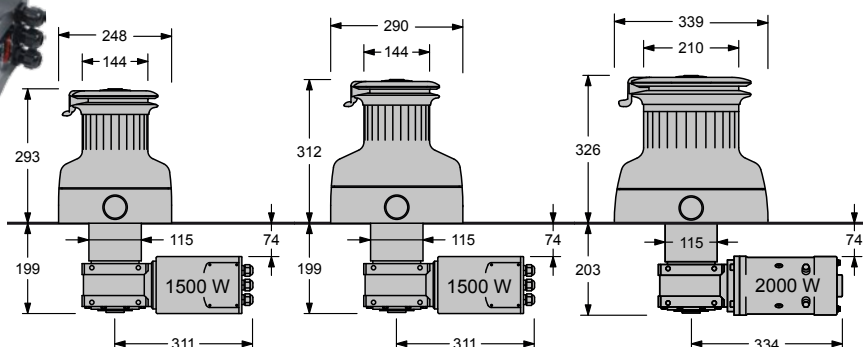

THREE SPEED WINCHES

MODEL	XT66.3EH	XT70.3EH	XT80.3EH
LINE SPEED 1 (m/min)	23.0	23.0	22.0
LINE SPEED 2 (m/min)	12.0	9.0	8.0
LINE SPEED 3 (m/min)	3.6	3.5	3.0
WORKING LOAD (kg)	2600	2900	4000
GLOBAL WEIGHT AL (kg)	35.7	40.3	59.6
GLOBAL WEIGHT CH (kg)	45.5	51.8	75.0

electric winches



XT70EV12/CH

XT70EV12/AL

For the correct identification of the winch, add after the winch model in the tables the following:


- **12** or **24** for 12 or 24 Volt versions;

- **/AL** for black aluminium drum or **/CH** for chromed drum.

e.g.: XT66EV12/AL is an electric winch size 66 with vertical drive 12V motor and with black aluminium drum.

VERTICAL DRIVE - MOTOR 1500 W 12/24 V XT66EV - XT70EV

This motor-gearbox system is suitable for the largest Antal winches: mod. XT66 and XT70. A special hypocycloidal gearbox gives max efficiency.

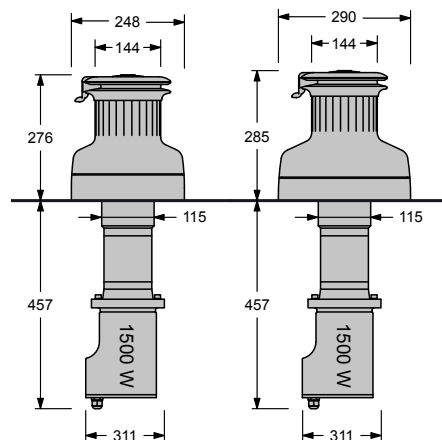


TWO SPEED WINCHES

MODEL	XT66EV	XT70EV
LINE SPEED 1 (m/min)	13.0	9.0
LINE SPEED 2 (m/min)	3.6	3.5
WORKING LOAD (kg)	2600	2900
GLOBAL WEIGHT AL (kg)	35.6	39.1
GLOBAL WEIGHT CH (kg)	45.4	50.6

VERTICAL DRIVE - MOTOR 1500/2000 W 12/24 V XT66.3EV - XT70.3EV - XT80.3EV

The models XT66.3, XT70.3 and XT80.3 maintain three speeds both in manual and in electric use; the push-button on the base starts the first gear (the fastest), second and third gear are automatically selected simply by reversing the rotation of the handle or pressing one of the two switches, one for the first and the third speed and one for the second.

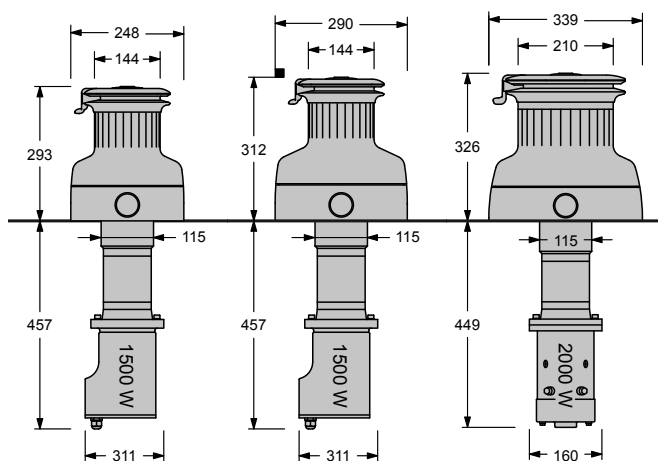

THREE SPEED WINCHES

MODEL	XT66.3EV	XT70.3EV	XT80.3EV
LINE SPEED 1 (m/min)	23.0	23.0	22.0
LINE SPEED 2 (m/min)	12.0	9.0	8.0
LINE SPEED 3 (m/min)	3.6	3.5	3.0
WORKING LOAD (kg)	2600	2900	4000
GLOBAL WEIGHT AL (kg)	38.6	42.1	59.6
GLOBAL WEIGHT CH (kg)	48.4	53.6	75.0

LINE SPEED: the recovery speed is calculated with the winch not under load; at maximum load the figure should be reduced by 30%.

MANUAL USE: the gearbox-motor unit is disengaged simply by inserting the handle.

CIRCUIT DIAGRAM: for the circuit diagram and accessories, such as switches, control boxes and breakers, see page 17.

All our electric winches are self-tailing and are available in both versions: with chrome-plated drum or with a reinforced black aluminium drum. For more information on these winches see pages 10-11.

electric system & accessories

SWITCHES

Two switches with watertight protection must be installed for each winch. To identify the first and the second speed, 2 colours are used: grey and red.

S.steel or plastic versions are available.




Mod. 251.035/SG S.steel cover, grey button

Mod. 251.035/SR S.steel cover, red button



Mod. 251.035/QG Plastic cover, grey button

Mod. 251.035/QR Plastic cover, red button



SQUARE SWITCHES

New model with hard black anodized aluminium cover. Sizes 59x66 mm only.

Mod. 251.035/AG Aluminium cover, grey button

Mod. 251.035/AR Aluminium cover, red button




CONTROL BOX

Solenoids are contained in a water tight "control box"; they are available for both 12 and 24 Volt.



BREAKER

A breaker should be mounted to protect the motor against overload.

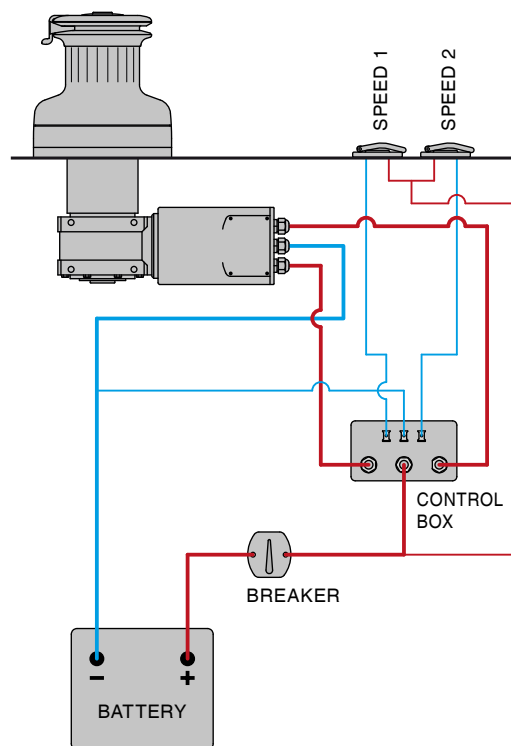

WINCH MODEL	MOTOR		BREAKER		CONTROL BOX MODEL
	WATT	VOLT	MODEL	AMP	
XT40 XT44 - XT48	700	12	A071	70	T6315/12
		24	A041	40	T6315/24
XT52 - XT62	1000	12	A081	80	T6315/12
		24	A041	40	T6315/24
XT66 - XT70	1500	12	A121	120	T6315/12
		24	A071	70	T6315/24
XT80.3 - W80.3	2000	24	A081	80	T6315/24
W90.3	3000	24	A121	120	T6415/24



hydraulic winch



XT62HD/CH

XT62HD/AL

HYDRAULIC SYSTEM

Hydraulic motors are available for Antal winches from model XT44 to XT80.3, as well as to maxi W80.3 and W90.3.

The pressure of the system varies from 100 to 120 bars for the larger winches. Connections are to be carried out with 3/8" pipes.

All hydraulic winches are available with a chromed drum, now also black aluminum drum with a reinforced crown gear (high resistance alloy or A316 s.steel) is available.

For more information, see pages 10-11.


For manual use, the motor unit is released simply by inserting the handle.

LINE SPEED

Line speeds are calculated in absence of load conditions and considering the flow of the lower table. The effective speed will be evaluated according to the actual size of the hydraulic unit.

For the correct identification of the winch, add after the winch model in the tables **/AL** for black aluminium drum or **/CH** for chromed drum.

e.g.: XT66HD/AL is a hydraulic winch size 66 with black aluminium drum.

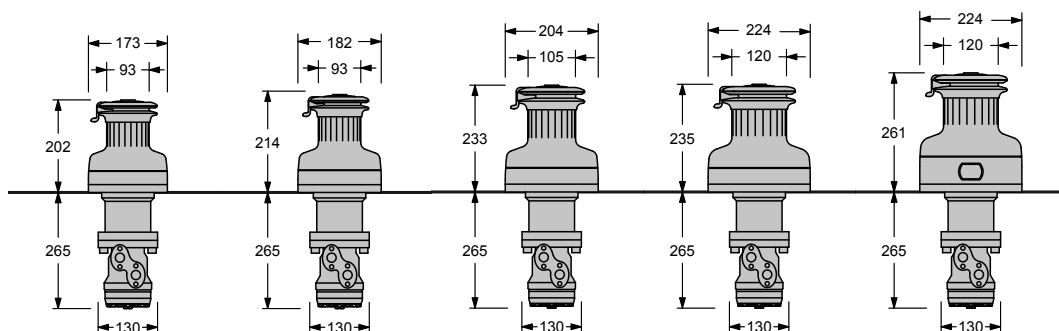

MODEL	XT44HD	XT48HD	XT52HD	XT62HD	XT62.3HD
LINE SPEED 1 (m/min)	12.0	12.5	16.0	13.0	36.9
LINE SPEED 2 (m/min)	5.5	5.0	4.6	4.0	13.0
LINE SPEED 3 (m/min)	-	-	-	-	4.0
WORKING LOAD (kg)	900	1000	1200	1400	1400
GLOBAL WEIGHT AL (kg)	17.2	18.2	20.4	22.2	24.1
GLOBAL WEIGHT CH (kg)	19.7	21.2	24.2	27.0	28.9

HYDRAULIC MOTOR

SIZE (cc)	50	50	50	50	50
PRESSURE (bar)	100	100	120	120	120
FLOW (l/min)	7.5	7.5	7.5	7.5	7.5

HYDRAULIC UNIT

These units are designed for the different requirements of each boat.

The winch speed is proportional to the flow from the hydraulic unit, the load of the winch is proportional to the pressure.

The hydraulic unit that must work a number of winches at the same time, must guarantee a flow equal to the sum of the flows required from each one.



The flow and pressure levels given in the table for each winch must not be exceeded.



All these models are fitted with Danfoss hydraulic motors series OMR or equivalent.

SWITCHES

Two switches with watertight protection must be installed for each winch. To identify the first and the second speed 2 colours are used: gray and red, s.steel, plastic or aluminium version available.

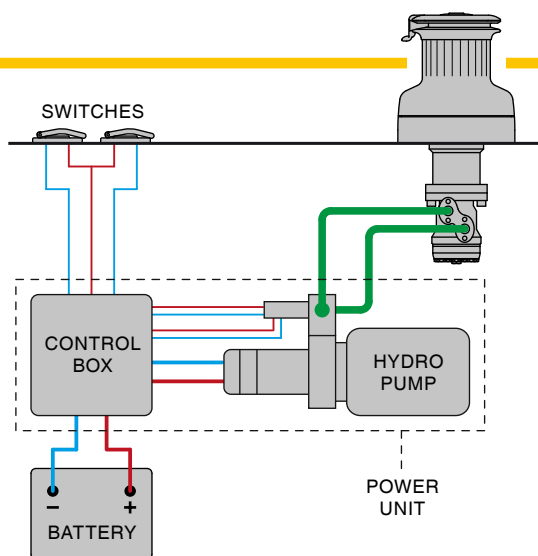

Switches with s.steel cover

Mod. 251.035/SG Grey button

Mod. 251.035/SR Red button



Switches with plastic cover

Mod. 251.035/QG Grey button


Mod. 251.035/QR Red button



Switches with aluminium cover

Mod. 251.035/AG Grey button

Mod. 251.035/AR Red button

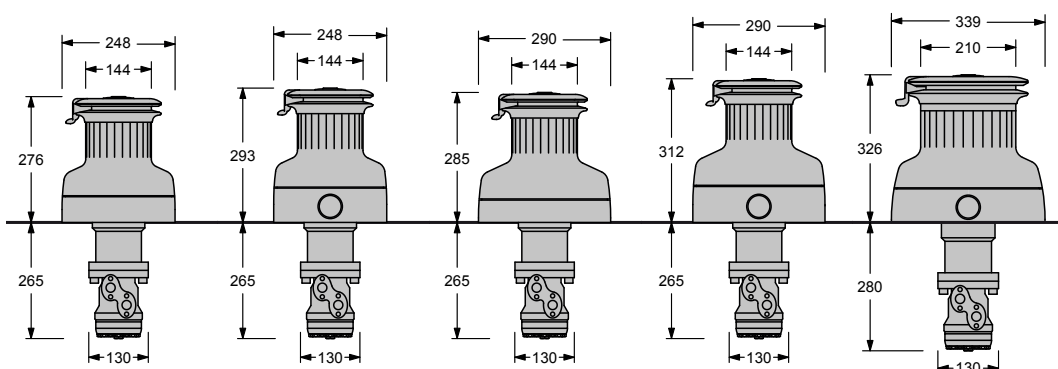

MODEL	XT66HD	XT66.3HD	XT70HD	XT70.3HD	XT80.3HD
LINE SPEED 1 (m/min)	13.0	23.0	9.0	23.0	22.0
LINE SPEED 2 (m/min)	3.6	12.0	3.5	9.0	8.0
LINE SPEED 3 (m/min)	-	3.6	-	3.5	3.0
WORKING LOAD (kg)	2600	2600	2900	2900	4000
GLOBAL WEIGHT AL (kg)	24.5	28.3	28.4	32.7	48.0
GLOBAL WEIGHT CH (kg)	34.3	38.1	39.8	44.2	63.4

HYDRAULIC MOTOR

SIZE (cc)	80	80	100	100	160
PRESSURE (bar)	120	120	120	120	120
FLOW (l/min)	12	12	15	15	24

maxi winches




Mod. W80.3 ST

THREE REDUCED SPEED MAXI WINCHES W80.3ST - W90.3ST

Maxi winches for boats more than 20 m long. These models are almost always powered with electric motors or hydraulic motors and available only with a chromed drum (CH).

All the gears are fitted with roller bearings and the drum works on a very wide diameter roller-ball bearings.

The push-button on the base starts the first gear (the fastest); second and third gear are automatically selected simply by reversing the rotation of the handle.

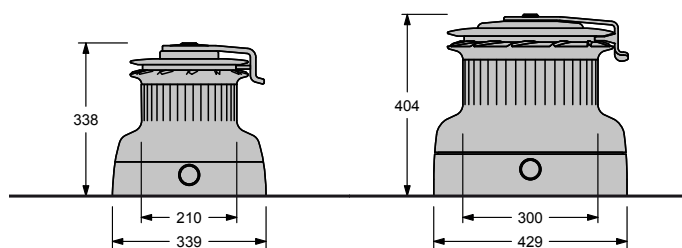


THREE SPEED WINCHES

MODEL	W80.3ST	W90.3ST
POWER P1-P2-P3	11.0 / 30.0 / 81.4	13.7 / 35.8 / 90.2
RECOVERY S1-S2-S3 (mm)	147 / 53 / 20	116 / 45 / 18
Ø LINE (mm)	12 / 22	16 / 30
WEIGHT CH (kg)	52.0	102.0
SCREWS N x Ø (mm)	8 x Ø10	8 x Ø12

HYDRAULIC MOTORS W80.3HD - W90.3HD

The maxi winches W80.3 and W90.3 can be powered by a hydraulic motor.

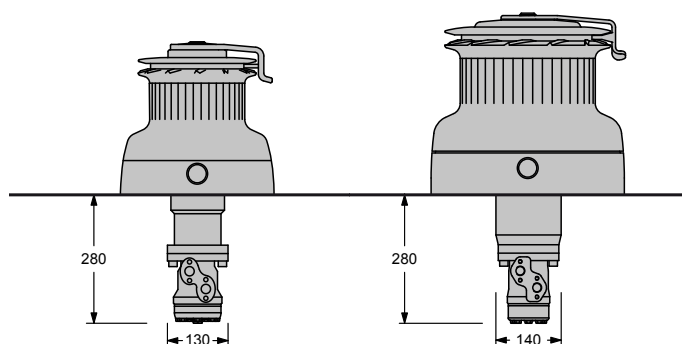

MODEL	W80.3HD	W90.3HD
LINE SPEED 1 (m/min)	22.0	18.0
LINE SPEED 2 (m/min)	8.0	7.0
LINE SPEED 3 (m/min)	3.0	2.5
WORKING LOAD (kg)	4000	8000
GLOBAL WEIGHT (kg)	63.4	118

HYDRAULIC MOTOR


SIZE (cc)	160	200
PRESSURE (bar)	120	120
FLOW (l/min)	24	30

electric maxi winches

HORIZONTAL DRIVE - 2000 or 3000 W - 24 V W80.3ELH - W90.3ELH

Model W80.3 is fitted with a 2000 W (24 V) motor and model W90.3 with a 3000 W (24 V) motor.

For the circuit diagram and accessories, such as switches, control-boxes and breakers, see page 17.

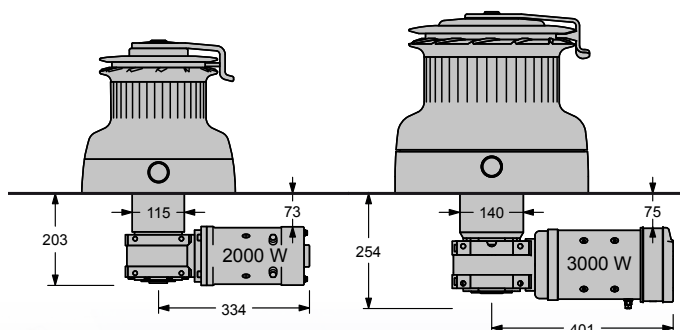

THREE SPEED WINCHES


MODEL	W80.3ELH	W90.3ELH
LINE SPEED 1 (m/min)	22.0	18.0
LINE SPEED 2 (m/min)	8.0	7.0
LINE SPEED 3 (m/min)	3.0	2.5
WORKING LOAD (kg)	4000	8000
GLOBAL WEIGHT (kg)	75.0	145.0
MOTOR (W)	2000	3000



VERTICAL DRIVE - 2000 or 3000 W - 24 V W80.3ELV - W90.3ELV

Vertical drive version is also available for models W80.3 and W90.3 (2000 W on the 80.3, 3000 W on the 90.3, both 24 V) with a hypocycloidal gearbox.

For the circuit diagram and accessories, such as switches, control-boxes and breakers, see page 17.

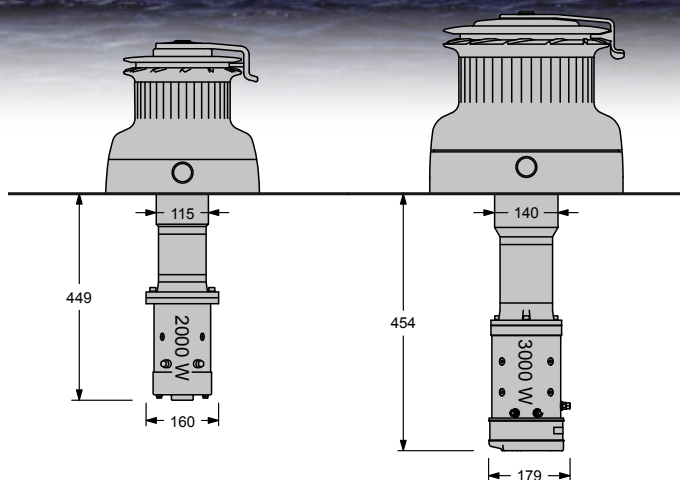

THREE SPEED WINCHES

MODEL	W80.3ELV	W90.3ELV
LINE SPEED 1 (m/min)	22.0	18.0
LINE SPEED 2 (m/min)	8.0	7.0
LINE SPEED 3 (m/min)	3.0	2.5
WORKING LOAD (kg)	4000	8000
GLOBAL WEIGHT (kg)	75.0	145.0
MOTOR (W)	2000	3000

XT race winches

SELF-TAILING WINCHES: XT RACE SERIES

XT R is the racing winch series obtained from the standard XT series, described above:

- self-tailing XT system
- differentiated grip of the drum knurling
- CNC base and skirt
- fast opening screwed ring
- axle with low friction PVD finishing

and in addition to reduce the weight:

- aluminium stem
- peek roller bearings for the drum and the main shaft
- lightened gears and main shaft




Green Challenge - "Kika" - Cantiere Bert - photo A. Carloni

Photo: Andrea Carloni / CISM



To reduce weight, XT series winches are mounted on bearings with peek resin roller on an aluminium stem.



antal alloy gears (1) mounted on low-friction and hard wearing PVD treated axles (2); corrosion-proof insulating gaskets (3).



The base, machined by the CNC process (produced with computer numeric control machines with no cast components), is lighter and stronger than normal castings.



XT44R

ONE REDUCED SPEED WINCHES

MODEL	XT16R	XT30R
WEIGHT (kg)	1.95	2.35

TWO REDUCED SPEED WINCHES

MODEL	XT16.2R	XT30.2R	XT40R	XT44R	XT48R	XT52R	XT62R	XT66R	XT70R
WEIGHT (kg)	2.0	2.2	3.6	4.7	5.3	7.1	8.5	13.5	16.2

For all others characteristics see tables on previous page 10-11

3 speed XT race winches

ONE DIRECT AND TWO REDUCED SPEED WINCHES XT52.3RD - XT62.3RD

Two new models XT52.3RD and XT62.3RD with one direct speed for a very fast recovery, plus two reduced speeds for medium and high loads are now available.


The push button on the top cover starts the first direct gear (the fastest), second and third reduced gears are automatically selected simply by reversing the rotation of the handle.

1st speed push
button on the top



XT62.3RD

XT52.3RD

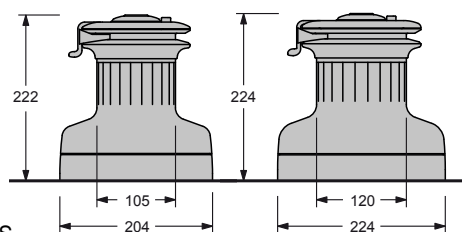

ONE DIRECT AND TWO REDUCED SPEED WINCHES


MODEL	XT52.3RD	XT62.3RD
POWER P1-P2-P3	4.8 / 15.9 / 52.8	4.2 / 17.8 / 62.1
RECOVERY S1-S2-S3 (mm)	330 / 100 / 30	377 / 89 / 26
Ø LINE (mm)	8 / 14	8 / 16
WEIGHT (kg)	7.5	9.2
SCREWS N x Ø (mm)	6 x Ø8	6 x Ø8

THREE REDUCED SPEED WINCHES XT62.3R - XT66.3R - XT70.3R

The push-button on the base starts the first gear (the fastest); second and third gear are automatically selected simply by reversing the rotation of the handle.

XT70.3R

XT62.3R

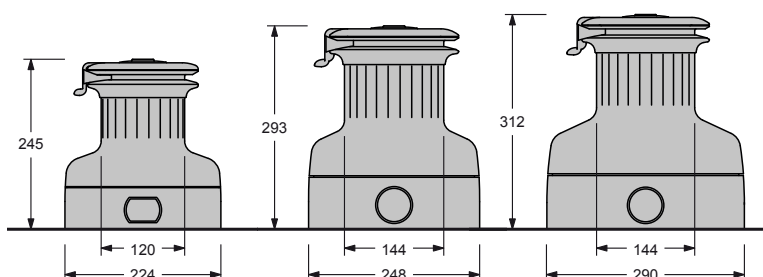

THREE REDUCED SPEED WINCHES

MODEL	XT62.3R	XT66.3R	XT70.3R
POWER P1-P2-P3	6.6 / 17.8 / 62.1	10.7 / 20.8 / 65.3	10.7 / 27.1 / 69.8
RECOVERY S1-S2-S3 (mm)	241 / 89 / 26	151 / 77 / 24	151 / 59 / 23
Ø LINE (mm)	8 / 16	10 / 18	10 / 18
WEIGHT AL (kg)	10.4	16.2	20.3
SCREWS N x Ø (mm)	6 x Ø8	6 x Ø10	6 x Ø10


1st speed push
button on the base



P1, P2, P3 : power with the first (fast), second (medium) and third (slow) gear.

S1, S2, S3 : recovery speed, the length of line recovered with one turn of the handle in first, second and third gear.

pedestals for winch

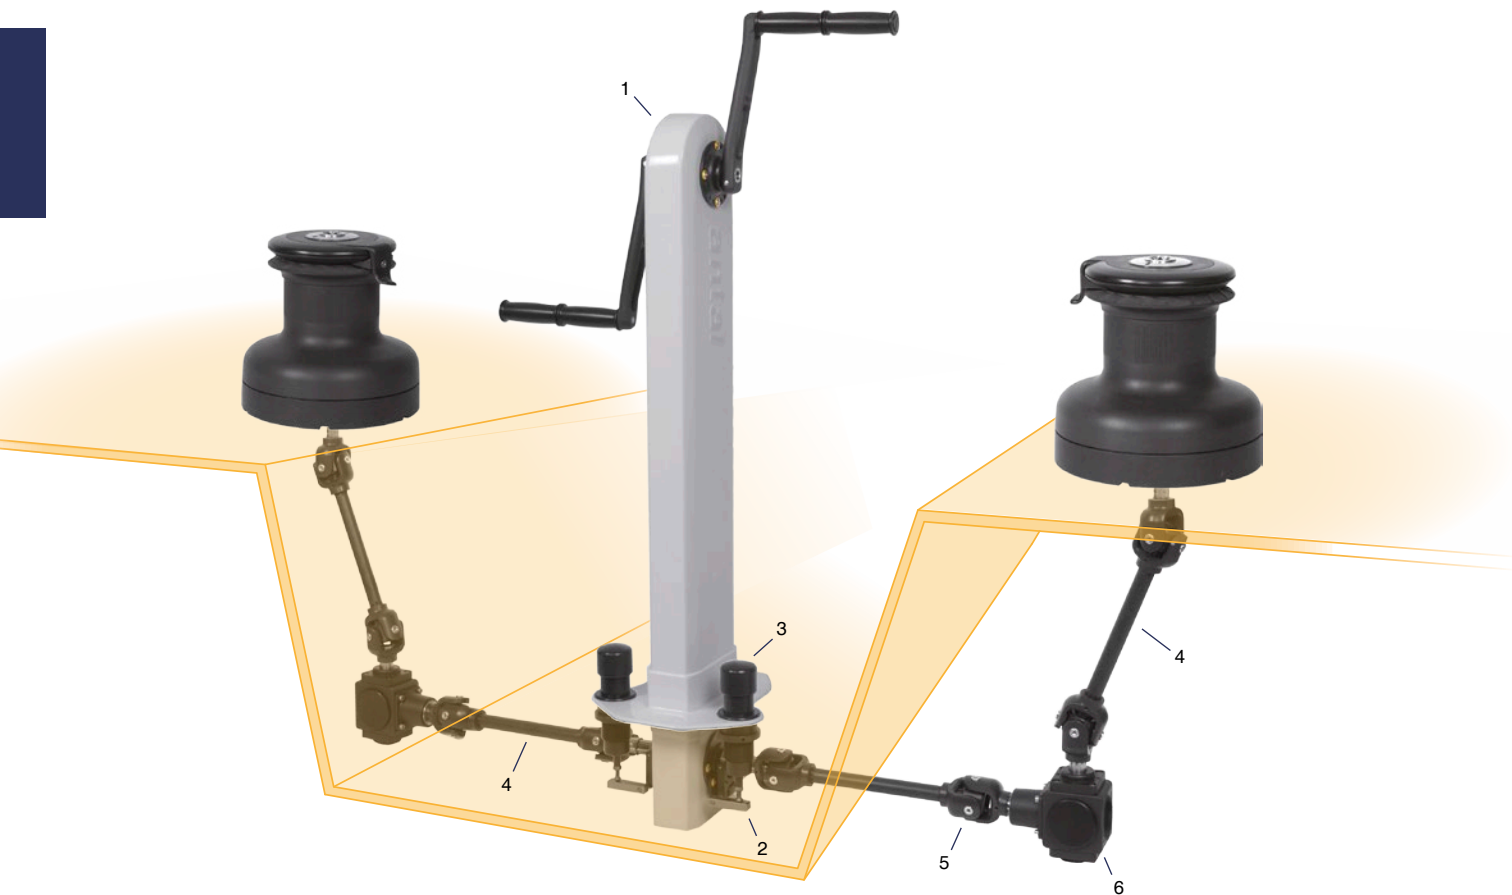

RACE SYSTEM

The Antal pedestal in carbon fibre relies on a belt drive that guarantees a light system.

Thanks to the push buttons (no. 3), the person operating the handles can control one, two or more winches independently. Note that the push button does not engage the third speed: this can be still engaged by pushing the winch knob at the base of the winch.

The system also comprises drive shafts (no. 4), in customised lengths on request, and gearboxes (no. 6).


Moreover, the cardan joints (no. 5) allow the drive shafts to be angled even to a large degree, thus enabling them to adapt to any hull design.





Mod. C001

Carbon fibre pedestal, with belt drive on toothed sheaves that are mounted on steel roller bearings.




Mod. C002

Drive-box, which transmits the drive from the pedestal to the axle of the single winch.



Mod. C003

Push-button, which turns the drive-box on and off, and permits to choose which winch to work on.




Mod. C004/xx

Aluminium drive shaft with black anodized ribbed end. Customised length on request.



Mod. C005

Aluminium universal joint with HR steel axles, mounted on both ends of the drive shaft, which enables to incline the shaft by large degrees.



Mod. C006


Gear box in right and left hand version, bronze gears on ball/roller bearings, HR steel axles and black anodized aluminium box.



CLASSIC PEDESTAL MECHANICAL DRIVE

This system is entirely run by a mechanical drive: drive shafts and bevel gears.

The classic system includes the same components as the race system but with the following differences: the pedestal is hard black anodized aluminium made, with shaft and bevel transmission.

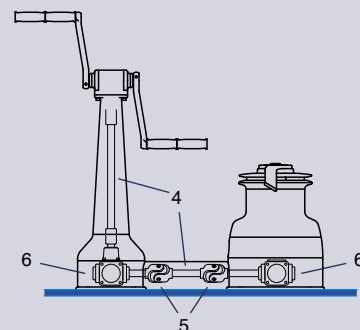

The classic solution is installed entirely above deck with no components under deck.

The shaft from the pedestal to the winch is protected by s.steel casing.

classic winches



CLASSIC SERIES WINCHES

Classic series winches (CHC) are supplied not only with a chromed drum, ST disks and ST arm, as the chrome series models (CH) described on pages 10-11, but also with a chromed lower skirt, thus being completely chromed.

The chrome-plating is carried out with great care to guarantee maximum durability. First the unit are highly polished, then thickly nickel-plated and finally finished in chrome.

POLISHED BRONZE

On request, Antal classic winches can be supplied (with drum, ST disks, ST arm and skirt) entirely made of polished bronze (add /BNC after the winch model).



Natural bronze winch handle with wooden grip.



line driver

TRAVELLER CONTROL SYSTEM

The control system is connected to a traveller on a closed circuit and ensures efficient control and a clean layout.

The system uses a self tailing pulley which operates in both direction with a textile "gripping" system that is efficient even if the circuit is not under strain and causes no wear in the rope.

A clutch pin sets the direction in which the traveller moves, or allows for it to be locked in the required position.

The power ratio obtainable with a normal (250 mm) handle is 8 to 1, which is much better than a tackle can offer; moreover, this system has a very limited size and weight.

MATERIALS: it is made of hard black anodized aluminium, central rod and ball bearing of AISI 316 stainless steel.




A 10 mm line is strongly recommended.

This model has been designed to control the spi-pool car but can also be useful for the genoa or the main car control.

Spy-Pole slider range on page 107



MODEL	240.010
Ø LINE (mm)	10
POWER	8 : 1
WEIGHT (kg)	1.40
SCREWS N x Ø (mm)	3 x Ø8

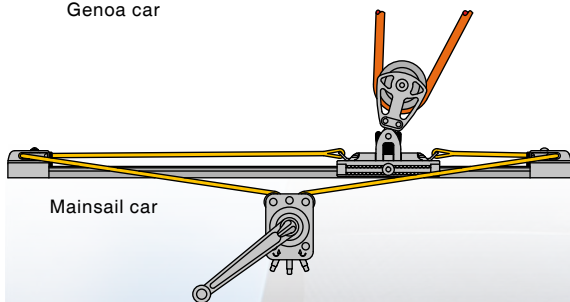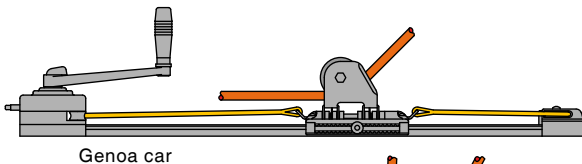

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

Mainsail car

HH 6601 Cat

powered line driver

POWERED LINE DRIVER


This is a solution done for the control of the main car with a simple “self-tailing” sheave on the deck, a motor and gearbox under the deck.

Three sizes available with 700, 1000 and 1500 W motors in 12 or 24 Volt version.



Mod. LD1000

Courtesy of Fountaine-Pajot - Sanya 57
Photo Gilles Martin-Raget

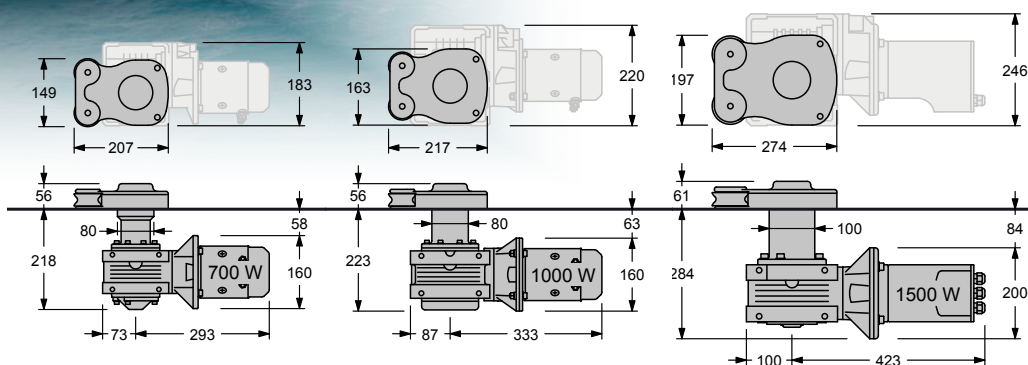

For the correct identification of the line-driver, add after the LD model in the tables /12 or /24 for 12 or 24 Volt version.

MODEL	LD700	LD1000	LD1500
MOTOR (W)	700	1000	1500
Ø LINE (mm)	10 / 12	12 / 14	12 / 14
WEIGHT (kg)	15	20	22
SCREWS N x Ø (mm)	4 x Ø8	4 x Ø8	4 x Ø8

2:1 CAR CONTROL

MAIN CAR SIZE (mm)	47 x 230	47 x 330	47 x 430
MAIN CAR MODEL	614.219	614.229	614.239
WORKING LOAD (kg)	800	1260	1600
CAR SPEED (m/sec)	0.10	0.12	0.12

For cars see page 132

The **SPEED** is calculated with the car not under load; at maximum load the figure should be reduced by 30%.

Two switches, for the left and the right car movement, a control-box and a safe circuit breaker to complete the electrical system (on page 17).



SWITCHES



CONTROL-BOX



BREAKER

CAR END STOP CONTROL

Mod. 6320/12 - Mod. 6320/24

To avoid overloads due to wrong operations, a car end stop control is available on request: two proximity switches - connected to a control unit - stop the car automatically at the track end. A s.steel plate must be attached to the bottom of the car to allow activation of the proximity switches.




END STOP CONTROL UNIT



PROXIMITY SWITCHES

The working load and the car speed of the previous table are calculated with a 2:1 car control.

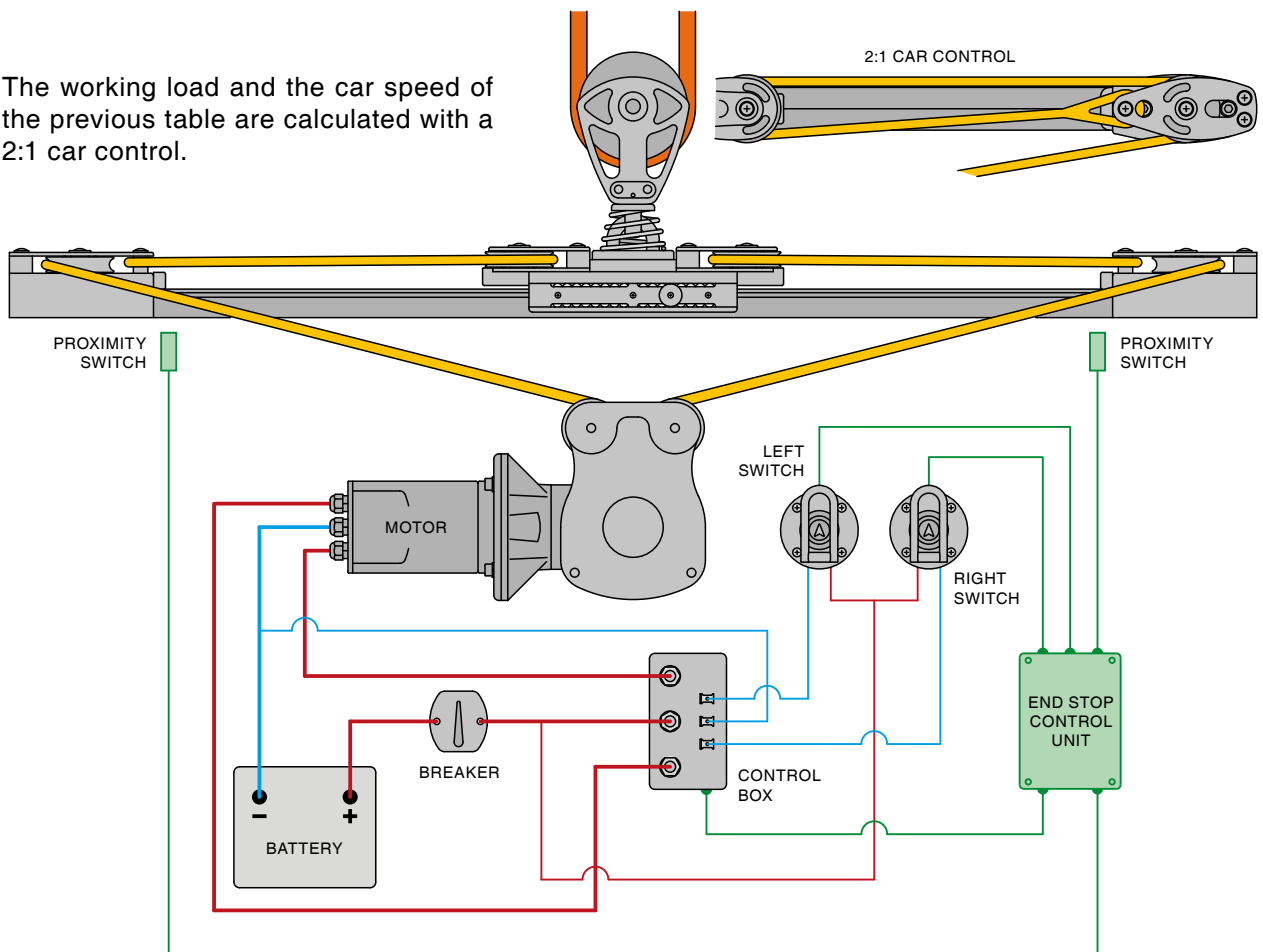

- Red line } electric diagram
- Blue line }
- Green line: end stop control system (optional)

winch handles

WINCH HANDLES

In addition to the extremely light black aluminium handles in two sizes: 200 mm (8 inches) and 250 mm (10 inches), there is also the classic chromed or natural polished bronze solution, always 250 mm long.

Three different grips are available: the single, the double and the new “ball-grip”.

The handle arm made of forged aluminium with lightening holes is extremely light and resists the heaviest torsion.

The grip is covered with rubber to give a firm hold and runs on two ball bearings to increase its efficiency (single-grip and ball-grip only).

All the models are available with or without **the lock system** which automatically locks the handle on the winch. To refer to the “no lock” version add /NL to the code.



ALUMINIUM L = 200 mm

MODEL	HAND GRIP	WEIGHT (kg)
2011	single	0.38
2012	ball-grip	0.48
2014	mini ball-grip	0.36



ALUMINIUM L = 250 mm

MODEL	HAND GRIP	WEIGHT (kg)
2021	single	0.43
2022	ball-grip	0.53
2023	double	0.62



CHROMED BRONZE L = 250 mm

MODEL	HAND GRIP	WEIGHT (kg)
2031	single	0.87
2032	ball-grip	0.97
2033	double	1.07



CUSTOM SOLUTIONS



Custom solutions are available on request: wooden grips (model /W), different colours, natural bronze (model /BN), special engravings...

THE SPEEDY WAY TO LOCK-UNLOCK THE WINCH HANDLE

Speedylock is the new Antal winch handle, available with the 250 mm lever with single, ball and double grip.

Hard black anodized forged aluminium lever, rubber grip on two ball bearings (on single-grip and ball-grip version).

ALUMINIUM L = 250 mm

MODEL	HAND GRIP	WEIGHT (kg)
2121	single	0.43
2122	ball-grip	0.53
2123	double	0.62



2123 2122 2121





clutches



Mod. V-Grip Plus

CAM 611 series..... 36



V-CAM 814 series 38



Plus & Maxi series 40



DV jammer series..... 42



V-grip series 44



organizers..... 45




swivelling cam-cleat..... 46



stopper deck blocks..... 47



clutch selection guide



1.
Pressure on
3 sides



2.
Load
distribution



3.
Line retrieval with
closed lever



4.
Emergency
opening



LINE DIAMETER	CAM 611	CAM 611/V		V-GRIP			V-CAM 814			V-GRIP PLUS			
		6	8	10	12	14	10	12	14	12	14	16	
Ø = 6 mm	250	400											
Ø = 8 mm	380		600	500			600						
Ø = 10 mm	500			700	700		850	850		1050			
Ø = 12 mm				1000	1000	1000		1200	1200	1400	1400		
Ø = 14 mm					1300	1300			1500		1700	1700	
Ø = 16 mm						1600						2100	
Ø = 18 mm													
Ø = 20 mm													
Ø = 22 mm													
				CLUTCH MAX LOAD (kg)									

* These models are fitted with the **V-GRIP** system that is internationally patented.

V-GRIP SYSTEM CLUTCHES

The V-Grip is an Antal patented system for rope locking. It works with a pressure exerted on 3 sides of the line with a higher friction and, consequently, with a lower pressure, in order not to damage manoeuvres.

All Antal clutches, except the Cam 611, are fitted with the V-Grip system.

The V-Grip system has the following characteristics:

- 1. Pressure on three sides.** Unlike the usual flat cam, V-Grip is fitted with a V-shaped cam that improves the holding strength without damaging the line cover.
- 2. Load distribution.** The curved base-V-Cam pair increases the bearing surface, preventing the load from being concentrated at a critical point.
- 3. Line retrieval with closed lever.** Line retrieval can be achieved with the lever closed. The line stops automatically in the new position with no slippage.
- 4. Emergency opening.** The line can be released under load without the use of a winch because the Antal mechanism guarantees easy opening even under heavy conditions.



CLUTCH RANGE

A complete range with 6 different models for lines from 6 to 22 mm. All Antal models, except the Maxi and the DV-Jammer, are available in single, double, triple and quadruple versions. The Cam 611 and Cam 814 are also available in a silver version with the new ergonomic aluminium lever.

CLUTCH SELECTION

Max loads of the lower table for each model and for different line diameters have been obtained from extensive tests.

Tests reveal best results on Dyneema with composite Kevlar/Polyester covers, while traditional pure-Polyester covers over a Dyneema core prove to have poor resistance. Also "all-Polyester" core/cover versions give excellent results.

LINE DIAMETER	V-GRIP MAXI					DV JAMMERS					
	14	16	18	20	22	8	10	12	14	16	18
Ø = 6 mm											
Ø = 8 mm						1500					
Ø = 10 mm							2000				
Ø = 12 mm	1400							3000			
Ø = 14 mm	1700	1700							4000		
Ø = 16 mm		2100	2100							5000	
Ø = 18 mm			2600	2600							6000
Ø = 20 mm				3000	3000						
Ø = 22 mm					3400						

cam 611 series



CAM 611 mod. 513.110
V-CAM 611 mod. 500.110

CAM 611 Silver mod. 543.110
V-CAM 611 Silver mod. 540.110

CAM 611 WITH FLAT CAM



Cam 611 for line 6 to 10 mm is available in single, double and triple, as well as horizontal. CAM 611 has a box structure in UV-resistant resin with steel reinforcements, an extruded aluminium base, wear-resistant bronze cam mechanism, and stainless steel aligning bushing.

The clutch can be completely dismantled for simple maintenance.

Line retrieval can be achieved with the lever closed, and the cam mechanism guarantees easy opening even under heavy load.

V-CAM 611 WITH V-CAM




V-Cam 611 is a new model with a V-Cam, for lines from 6 to 8 mm. This new version supports much higher loads: 400 kg on the 6 mm line and 600 kg on the 8 mm. All the features are the same of CAM 611, as shown in the following table.

V-CAM 611 SILVER

Both CAM 611 and V-CAM 611 clutches are now available in the “silver series”: with a new ergonomic, polished and silver anodized aluminium lever. All the characteristics remain the same as shown in the following table.



Heinrich Yunikon



CAM 611



CAM 611
SILVER

WITH FLAT CAM

MODEL	MODEL	Ø LINE mm	TYPE	WIDTH mm	WEIGHT kg	SCREWS N° x Ø mm
513.110	543.110	6 - 10	SINGLE	33	0.37	2 x Ø6
513.120	543.120		DOUBLE	62	0.74	4 x Ø6
513.130	543.130		TRIPLE	91	1.10	6 x Ø6
513.210	543.210		HORIZONTAL	33	0.51	2 x Ø6 + 1 x Ø5




V-CAM 611

V-CAM 611
SILVER

WITH V-CAM

MODEL	MODEL	Ø LINE mm	TYPE	WIDTH mm	WEIGHT kg	SCREWS N° x Ø mm
500.110	540.110	6	SINGLE	33	0.37	2 x Ø6
500.120	540.120		DOUBLE	62	0.74	4 x Ø6
500.130	540.130		TRIPLE	91	1.10	6 x Ø6
500.210	540.210		HORIZONTAL	33	0.51	2 x Ø6 + 1 x Ø5
501.110	541.110	8	SINGLE	33	0.37	2 x Ø6
501.120	541.120		DOUBLE	62	0.74	4 x Ø6
501.130	541.130		TRIPLE	91	1.10	6 x Ø6
501.210	541.210		HORIZONTAL	33	0.51	2 x Ø6 + 1 x Ø5



Single



Double



Triple



Horizontal

DOUBLE SHEAVE ORGANIZER

This solution has been designed for the new double and triple CAM 611: mounted at the back of the clutch battery guiding the line towards the winch.

For more information see page 45.



mod. 522.031

STICKERS FOR CAM 611 AND CAM 814

A set of 54 stickers is provided for an easy indication of manoeuvres; colours: red, green and black.



MODEL	VERSION
513 / E	ENGLISH
513 / F	FRENCH
513 / I	ITALIAN

V-cam 814 series



V-CAM 814
mod. 509.111

V-CAM 814 Silver
mod. 549.111

V-CAM 814

Three models for 8-10 mm, 10-12 mm and 12-14 mm lines; available in single, double, triple and quadruple. V-CAM814 has a box-structure in UV-resistant resin with s.steel reinforcements, aluminium base, V-Cam and aligning bushing in Aisi 316.

It can be completely dismantled for simple maintenance and repairing.

Line retrieval can be achieved with the lever closed.

This model is fitted with a large “V” shaped cam that offers higher holding strength than model V-Grip (page 44) and a new mechanism that guarantees easy opening even under heavy load.


V-CAM 814 SILVER

V-CAM 814 clutches are now available in “silver series”: with a new ergonomic, polished and silver anodized aluminium lever.

All the characteristics remain the same as shown in the following table.



J111 J-Boat



MODEL	MODEL	Ø LINE mm	TYPE	WIDTH mm	WEIGHT kg	SCREWS N° x Ø mm
509.111	549.111	8 - 10	SINGLE	36	0.60	2 x Ø6
509.121	549.121		DOUBLE	65	1.10	4 x Ø6
509.131	549.131		TRIPLE	94	1.60	6 x Ø6
509.141	549.141		QUADRUPLE	123	2.10	8 x Ø6
509.111/H	549.111/H		HORIZONTAL	36	0.72	2 x Ø8 + 1 x Ø5
509.112	549.112	10 - 12	SINGLE	36	0.60	2 x Ø8
509.122	549.122		DOUBLE	65	1.10	4 x Ø8
509.132	549.132		TRIPLE	94	1.60	6 x Ø8
509.142	549.142		QUADRUPLE	123	2.10	8 x Ø8
509.112/H	549.112/H		HORIZONTAL	36	0.72	2 x Ø8 + 1 x Ø5
509.113	549.113	12 - 14	SINGLE	36	0.60	2 x Ø8
509.123	549.123		DOUBLE	65	1.10	4 x Ø8
509.133	549.133		TRIPLE	94	1.60	6 x Ø8
509.143	549.143		QUADRUPLE	123	2.10	8 x Ø8
509.113/H	549.113/H		HORIZONTAL	36	0.72	2 x Ø8 + 1 x Ø5



Single



Double



Triple



Quadruple



Horizontal

V-CAM 814 CLUTCH ORGANIZER

This solution allows manoeuvres to be guided from the clutches to the winch.
For more information see page 45.



MODEL	N° SHEAVES
513.032	3
514.032	4
515.032	5
516.032	6

MULTI RING ORGANIZER

The low friction Multi Ring Organizer without sheaves is a very light and small-sized solution that fits lines up to 12 mm.
For more information see page 171.



MODEL	N° HOLES
R3.14	3
R4.14	4
R5.14	5
R6.14	6

Plus & Maxi series



V-GRIP PLUS
mod. 508.121

V-GRIP MAXI
mod. 508.114

V-GRIP PLUS

3 models for lines from 10 to 16 mm available in single, double and triple.

Hard black anodized aluminium structure and AISI 316 s.steel mechanism, "V" shaped cam and lever.

Easy opening under load for line releasing without the use of winch.

Line retrieval can be achieved with the lever closed, the line stops automatically in the new position with no slippage.

V-GRIP MAXI

5 models for lines up to 22 mm, **only single version is available !**


Hard black anodized aluminium structure and AISI 316 s.steel mechanism, "V" shaped cam and lever.

Easy opening under load for line releasing without the use of winch.

Line retrieval can be achieved with the lever closed, the line stops automatically in the new position with no slippage.




Swan 54 - Nautor

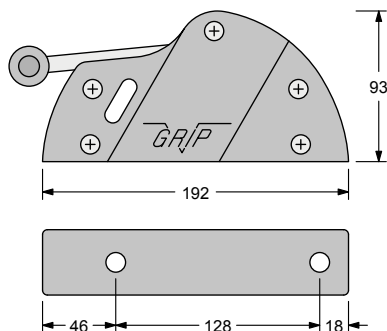

V-GRIP PLUS



MODEL	Ø LINE mm	TYPE	WIDTH mm	WEIGHT kg	SCREWS N° x Ø mm
508.121	10 - 12	SINGLE	41	1.10	2 x Ø10
508.122/P		DOUBLE	80	2.20	4 x Ø10
508.123		TRIPLE	119	3.30	6 x Ø10
508.141	12 - 14	SINGLE	41	1.10	2 x Ø10
508.142		DOUBLE	80	2.20	4 x Ø10
508.143		TRIPLE	119	3.30	6 x Ø10
508.161	14 - 16	SINGLE	41	1.10	2 x Ø10
508.162		DOUBLE	80	2.20	4 x Ø10
508.163		TRIPLE	119	3.30	6 x Ø10

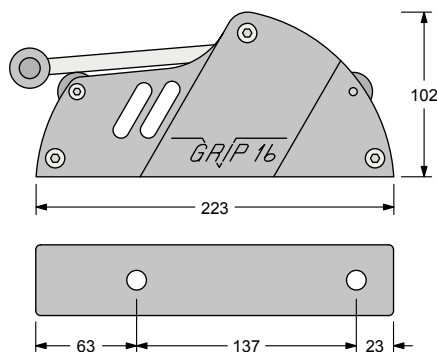

V-GRIP MAXI



MODEL	Ø LINE mm	WIDTH mm	WEIGHT kg	SCREWS N° x Ø mm
508.114	12 - 14	44	1.40	2 x Ø10
508.116	14 - 16			
508.118	16 - 18			
508.120	18 - 20			
508.122	20 - 22			

V-GRIP PLUS AND MAXI ORGANIZER

This solution allows manoeuvres to be guided from the clutches to the winch.
For more information see page 45.



	MODEL	N° SHEAVES
V-GRIP PLUS	523.042	3
	524.042	4
	525.042	5
	526.042	6
V-GRIP MAXI	523.052	3
	524.052	4
	525.052	5
	526.052	6

DV jammer series



DV JAMMER

The DV Jammer is a line holding device suitable for the extremely high loads of the high-tech Dyneema lines as well as exceptional holding power on polyester ropes.


Six models, for lines ranging from 8 to 18 mm diameter, are available. This covers a wide range of boats up to around 100 ft in length.

DV Jammer sizes 8 and 10 have the same mounting pattern, similarly sizes 12 - 14 and sizes 16 - 18.


DV - DOUBLE V-GRIP

The DV-grip is a locking system based on two opposing V shaped wedges, the result is a 4 sides grip which provides additional benefits over traditional 2-sided grip line stoppers:

- Less line wear
- Higher holding power
- Smaller sizes and lower weight



DOUBLE
V-GRIP




DV is a patent pending product by Antal srl, Padova, Italy.

TEST RESULTS AND MAX LOAD


Test values were obtained on Dyneema lines with different covers:

- Dyneema with polyester cover
 - Dyneema with mixed Kevlar-polyester cover
- Results shown in the lower graph correspond to the failure of the cover and the resulting core slippage.

Dyneema line with a Kevlar-Polyester cover provides much better test results than the Dyneema line with a Polyester cover which performed poorly, with results even below the simple polyester line (polyester cover and core).

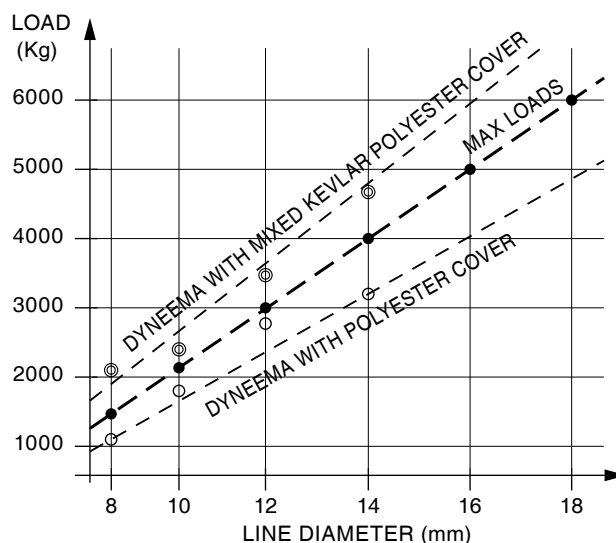

Appropriate safety margins must be considered for the max loads. The suggested maximum load limit is the limit of the line. Above values for max loads are not valid for Dyneema lines with a polyester cover or for polyester lines with a lower breaking load value than the recommended maximum load value. Tests with polyester lines (polyester core and cover) show that the limits is the breaking load of the line itself, with values close to our max loads.



DV JAMMERS: STANDARD MODELS

Six models, for 8, 10, 12, 14, 16 and 18 mm lines are offered.

DV JAMMERS: REMOTE CONTROL


A “remote control” version is also available: this model does not have the upper manual control slider, the opening is done with a control line.

DV STANDARD mod.	REMOTE CONTROL mod.	Ø LINE mm	L mm	H mm	T mm	WEIGHT kg	STUDS N° x Ø mm
505.081	505.082	8	126	86	34	0.60	4 x Ø6
505.101	505.102	10	141	90		0.69	4 x Ø8
505.121	505.122	12	169	108		1.20	4 x Ø10
505.141	505.142	14	185	113	42	1.36	
505.161	505.162	16	209	125		2.20	4 x Ø12
505.181	505.182	18	209	125		2.20	

Mounting studs, nuts and washers are included.

DV JAMMERS WITH MOUNTING BASE

When it is not possible to access the mounting studs/nuts/washers from the bottom side of the jammer (for example when mounting on a mast), Antal offers a special mounting base that can be mounted from above with 4 screws (not included).

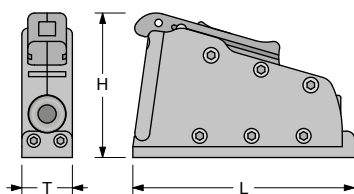


DV STANDARD WITH BASE mod.	REMOTE CONTROL WITH BASE mod.	Ø LINE mm	L mm	H mm	T mm	WEIGHT kg	SCREWS N° x Ø mm
505.086	505.087	8	134	93	34	0.69	4 x Ø6
505.106	505.107	10	149	97		0.79	4 x Ø8
505.126	505.127	12	178	118		1.39	4 x Ø10
505.146	505.147	14	194	123	42	1.57	
505.166	505.167	16	218	135		2.56	4 x Ø12
505.186	505.187	18	218	135		2.56	

The 4 lower base mounting screws are not included.

DV JAMMER: SIDE-MOUNTING VERSION

DV Jammers are also available for side-mounting; the same model can be mounted on either left or right side.

Screws, washers and nuts in AISI 316 are included.



DV STANDARD SIDE-MOUNTING mod.	REMOTE CONTROL SIDE-MOUNTING mod.	Ø LINE mm	L mm	H mm	T mm	WEIGHT kg	SCREWS N° x Ø mm
505.083	505.085	8	135	95	34	0.63	4 x Ø6
505.103	505.105	10	150	99		0.72	5 x Ø6
505.123	505.125	12	179	118		1.22	4 x Ø8
505.143	505.145	14	195	122	42	1.35	5 x Ø8
505.163	505.165	16	213	135		2.47	6 x Ø8
505.183	505.185	18	213	135		2.47	8 x Ø8

Mounting screws, nuts and washers are included.

V-grip clutch



mod. 507.111



Sly 38

CLUTCHES V-GRIP

Aisi 316 s.steel mechanism and lever, bronze "V" shaped cam and black anodized aluminium structure.

3 models are available for 8-12, 10-14, and

12-16 mm lines in single, double and triple version.

This is the best solution when minimum sizes are required: it is only 6.8 cm high.

Single


Double

Triple



V-GRIP

MODEL	Ø LINE mm	TYPE	WIDTH mm	WEIGHT kg	SCREWS N° x Ø mm
507.111	8 - 10 - 12	SINGLE	34	0.55	2 x Ø6
507.121		DOUBLE	67	1.10	4 x Ø6
507.131		TRIPLE	101	1.45	6 x Ø6
507.112	10 - 12 - 14	SINGLE	34	0.55	2 x Ø8
507.122		DOUBLE	67	1.10	4 x Ø8
507.132		TRIPLE	101	1.45	6 x Ø8
507.113	12 - 14 - 16	SINGLE	34	0.55	2 x Ø8



V-GRIP ORGANIZER

This solution allows manoeuvres to be guided from the clutches to the winch.


For more information see page 45.



DOUBLE SHEAVE ORGANIZER

This solution has been designed for the new double and triple CAM 611: mounted at the


back of the clutch battery guiding the line towards the winch.



	MODEL	N°	SHEAVES	LENGTH mm	WEIGHT kg	A mm	B mm	C mm	H mm	SCREWS N° x Ø mm
			material							
CAM611	522.031	2	RESIN	88	0.16	22	50	28	36	2 x Ø8

V-GRIP ORGANIZER

This solution allows manoeuvres to be guided from the clutches to the winch.



	MODEL	N°	SHEAVES	LENGTH mm	WEIGHT kg	A mm	B mm	C mm	H mm	SCREWS N° x Ø mm
			material							
V-CAM 814	513.032	3	RESIN	90	0.18	28	30	14	39	3 x Ø6
	514.032	4		120	0.22					4 x Ø6
	515.032	5		150	0.27					5 x Ø6
	516.032	6		180	0.32					6 x Ø6
V-GRIP PLUS	523.042	3	ALUMINIUM	125	0.43	38	39	16	46	3 x Ø8
	524.042	4		165	0.57					4 x Ø8
	525.042	5		205	0.71					5 x Ø8
	526.042	6		245	0.85					6 x Ø8
V-GRIP MAXI	523.052	3	ALUMINIUM	133	0.50	43	44	20	46	3 x Ø8
	524.052	4		177	0.65					4 x Ø8
	525.052	5		221	0.83					5 x Ø8
	526.052	6		265	1.00					6 x Ø8
V-GRIP	533.032	3	RESIN	100	0.19	28	35	19	38	3 x Ø6
	534.032	4		135	0.24					4 x Ø6
	535.032	5		170	0.30					5 x Ø6
	536.032	6		205	0.35					6 x Ø6


swivelling cleat



SERVO CLEAT

The particular stainless and plastic cam teeth conformation is designed to make line inserting between cams easy. Made of plastic with s. steel "ribs". Screws are included.

MODEL	Ø LINE mm.	I mm	L mm	SCREWS N° x Ø mm.
502.011	3 - 7	27	48	2 x Ø4
502.22/37	6 - 10	37	64	2 x Ø5
502.022	6 - 12	40	70	2 x Ø5
502.033	10 - 14	52	86	2 x Ø6




Mod. 522.022 SWIVELLING CLEAT

The aluminium base swivels through 360° on single races of Torlon ball bearings. The system is fitted with 2 x 28 mm sheaves for Lines up to 10 mm

Fixing: 3 x 5 mm screws

Weight: 0.23 kg

SWL on the cam cleat: 150 kg

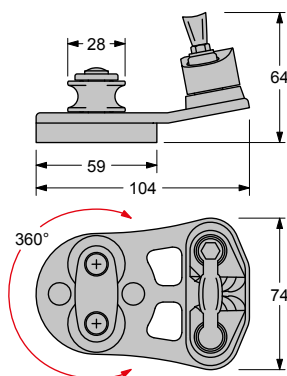

Mod. 522.140 BLOCK AND SERVO CLEAT


The aluminium base swivels through 360° on double races of Torlon ball bearings.

The system is completed with a 60 mm block for Lines up to 12 mm

Fixing: 3 x Ø6 mm screws

Weight: 0.82 kg

SWL on the cam cleat: 200 kg

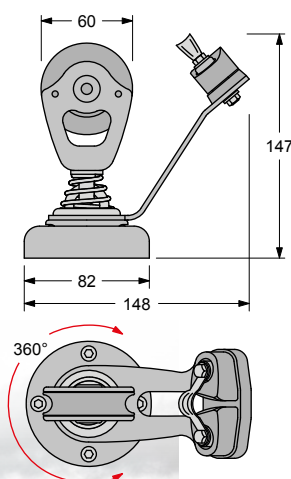

stopper deck block

The sheaves are made of high strength resin, fitted with composite fibre bush and side ball-bearings. No maintenance or lubrication is required.


The machined side plates are made of high strength alloy, hard black anodized for wear and corrosion proofing and with all the edges smoothed off.

The aluminium locking cam is fitted on an automatic opening spring: relaxing the sheet is sufficient to open the jammer.

Compact design with the lever fully concealed within the side plates and with recessed fasteners.

The cam cannot be locked under high loads. It's intended to hold the line temporarily and not under heavy loads.

Left and right versions are available.

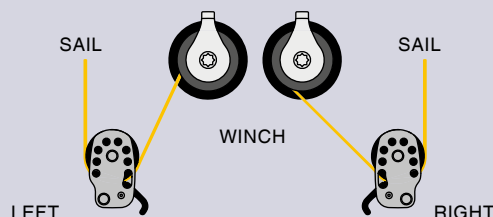

Mod. 852.100




Mod. 851.100



FM27 OD 'Saphire' - C. Maletto

DIAMETER 65, 80, 100, 125 mm



Left and right versions are available, just add **/LEFT** or **/RIGHT** to the model code when ordering.

MODEL	Ø LINE mm	D mm	L mm	SWL kg	WEIGHT kg	SCREWS N° x Ø mm
SINGLE						
851.065 *	6 - 12	65	116	800	0.23	2 x Ø8
851.080	6 - 14	80	131	1000	0.33	2 x Ø8
851.100	8 - 16	100	152	2000	0.65	2 x Ø10
851.125	10 - 18	125	174	3500	1.10	1 x Ø12 + 2 x Ø10
DOUBLE						
852.065 *	6 - 12	65	116	800	0.38	2 x Ø8
852.080	6 - 14	80	131	1000	0.56	2 x Ø8
852.100	8 - 16	100	152	2000	1.50	2 x Ø10
852.125	10 - 18	125	174	3500	1.85	1 x Ø12 + 2 x Ø10

* In the smallest model (D=65) there is no spring for the cam opening.





mini s.steel blocks 50



mini snatch blocks 53



OPF series..... 54



XXL series 68



looper series 72



A316 s.steel series 76



hollow pin deck blocks..... 84



mast blocks..... 86



organizers..... 87



Tulip series 88



mainsail blocks 90



special blocks 91



Dynablock..... 92



snatch looper 93



snatch blocks..... 94



mini s.steel blocks

MINI BLOCKS 34x6 AND 40x8 SERIES


This series offers extremely high working loads (SWL: 34x6 = 400 kg, 40x8 = 500 kg) while still compact and lightweight. The sheave is made of resin with a double lateral ball-bearing. Cheekplates are made of perfectly polished AISI 316 stainless steel. The high quality materials guarantee a maintenance-free product.



Mod. 00301

SHEAVE

Resin sheave with double self-captive ball bearings.



Mod. 03411/M

Ø = 34 mm
line = 6 mm
SWL = 400 kg

Mod. 04013/M

Ø = 40 mm
line = 8 mm
SWL = 500 kg

CAM CLEAT

All models can be supplied with cam cleat. Just add /C to the model code when ordering.



Mod. 003XX/C

Size 34x6
Weight = + 42 gr
Max load = 80 kg

Mod. 004XX/C

Size 40x8
Weight = + 42 gr
Max load = 80 kg

SWIVEL HEAD

All models are available with swivel head, just add /SW to the model code when ordering.




Mod. 003XX/SW

Size 34x6
Weight = + 15 gr
Max load = 400 kg

Mod. 004XX/SW

Size 40x8
Weight = + 20 gr
Max load = 500 kg



The vertical blocks (mod. 00323 and 00324 on page 51 mod. 00423 and 00424 on page 52) can be grouped in battery, joined by a central pivot. Add the number of elements to the model code, as in the following example: 00323/2, 00323/3, 00323/n respectively for batteries from 2, 3, n pieces.

34 mm sheave for 6 mm line

Safe working load = 400 kg



Mod. 00301

SHACKLE BLOCK
Weight = 44 gr
SWL = 400 kg



Mod. 00320

SINGLE U-HEAD
Weight = 40 gr
SWL = 400 kg



Mod. 03413/M

Ø = 34 mm
line = 8 mm
SWL = 400 kg



Mod. 00323

UPRIGHT
Weight* = 55 gr
SWL = 400 kg
2 x Ø5 mm screws
(included)



Mod. 00302

SINGLE BECKET
Weight = 52 gr
SWL = 400 kg



Mod. 00321

U-HEAD BECKET
Weight = 43 gr
SWL = 400 kg



Mod. 00324

"OVER THE TOP"
Weight* = 65 gr
SWL = 400 kg
2 x Ø5 mm screws
(included)



Mod. 00330

FIDDLE BLOCK
Weight = 65 gr
SWL = 400 kg



Mod. 00303

DOUBLE BLOCK
Weight = 82 gr
SWL = 600 kg



Mod. 00304

DOUBLE BECKET
Weight = 90 gr
SWL = 600 kg



Mod. 00331

FIDDLE BECKET
Weight = 76 gr
SWL = 400 kg



Mod. 00305

TRIPLE BLOCK
Weight = 94 gr
SWL = 600 kg



Mod. 00306

TRIPLE BECKET
Weight = 102 gr
SWL = 600 kg



Mod. 00322

SADDLE BLOCK
Weight* = 46 gr
SWL = 400 kg
2 x Ø4 mm screws
(included)



Mod. 00316

STAND-UP
Weight* = 46 gr
SWL = 400 kg
1 x Ø6 mm screw
(included)



Mod. 00311

FOOT BLOCK
Weight* = 36 gr
SWL = 400 kg
2 x Ø6 mm screws
(included)

* screws not included

antal

- 51 -

40 mm sheave for 8 mm line

Safe working load = 500 kg



Mod. 00401

SHACKLE BLOCK
Weight = 62 gr
SWL = 500 kg



Mod. 00420

SINGLE U-HEAD
Weight = 56 gr
SWL = 500 kg



Mod. 04514/M

Ø = 45 mm
line = 8 mm
SWL = 600 kg



Mod. 00402

SINGLE BECKET
Weight = 73 gr
SWL = 500 kg



Mod. 00421

U-HEAD BECKET
Weight = 60 gr
SWL = 500 kg



Mod. 00423

UPRIGHT
Weight* = 77 gr
SWL = 600 kg
2 x Ø6 mm screws
(included)



Mod. 00430

FIDDLE BLOCK
Weight = 91 gr
SWL = 500 kg



Mod. 00403

DOUBLE BLOCK
Weight = 115 gr
SWL = 600 kg



Mod. 00404

DOUBLE BECKET
Weight = 126 gr
SWL = 600 kg



Mod. 00431

FIDDLE BECKET
Weight = 106 gr
SWL = 500 kg



Mod. 00405

TRIPLE BLOCK
Weight = 132 gr
SWL = 600 kg



Mod. 00406

TRIPLE BECKET
Weight = 143 gr
SWL = 600 kg



Mod. 00422

SADDLE BLOCK
Weight* = 64 gr
SWL = 500 kg
2 x Ø5 mm screws
(included)



Mod. 00416

STAND-UP
Weight* = 64 gr
SWL = 500 kg
1 x Ø6 mm screw
(included)



Mod. 00411

FOOT BLOCK
Weight* = 50 gr
SWL = 500 kg
2 x Ø6 mm screws
(included)

mini snatch blocks

MINI SNATCH BLOCK D=32 mm

It is a very light solution suitable for many riggings, completely made in U-V resistant high strength resin. It can be fastened both with a line or with a shackle.



full scale



Mod. 9030 For line connection


MINI SNATCH BLOCK

Sheave = Ø32 mm

Weight = 39 gr

Max line = Ø8 mm

SWL = 250 kg



Mod. 9031 For 5 mm shackle



black
Mod. 9030



yellow
Mod. 9030/Y

Mod. 9001 SNAP LOOP

It is a simple and original line loop with a snap that offers an easy fastening and avoids accidental opening. For more info, see pag. 174



Royal Oak 20' - V.Malingri - Dakar Guadalupe - solo

OPF SERIES

New by Antal the “One Piece Frame” block, the block without pins or screws, it is a light and strong solution: simply a hard black anodized and teflon coated aluminium frame in one piece.

A complete range from 50 to 140 mm sheaves in single, double, triple, fiddle, and deck versions, for webbing or shackle connection.

Sizes are based on the range of HR shackles available and on their safe working load (SWL).

THE HR SWIVEL HEAD

Made in high resistance s.steel, with three positions: swivelling head, longitudinal lock and transversal lock.

HR shackles included.



THE ONE PIECE FRAME

The one-piece aluminium extruded body is the strongest and lightest solution, no assembling pin rivets or screws and nuts.



CNC machined - polished - hard black anodized and teflon coated.

THE COMPOSITE FIBRE SHEAVE

The resin (aluminium on larger mod) sheave runs on the main Composite Fibre bearing and on a ground s.steel hub: low friction highloads - no lubricant required.

The self-captive side ball bearing reduces the friction and makes disassembling, cleaning and maintenance very easy.

Sheaves are supplied with the s.steel hub, they are available separately.

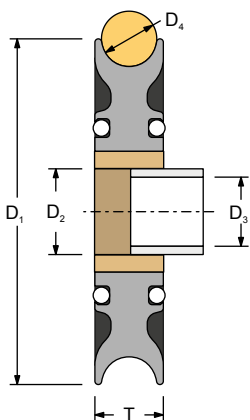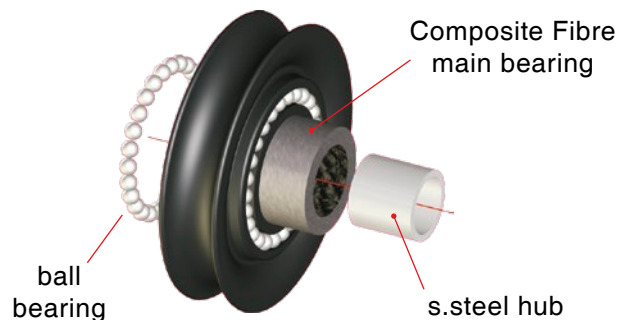

SHEAVE MODEL	D ₁ mm	T mm	MATERIAL	D ₂ mm	D ₃ mm	D ₄ mm	SWL kg	WEIGHT gr
04819/F	48	19	RESIN	20	16	14	2200	40
05114/M*	50	14	RESIN	12	8	10	600	30
06016/F	60	16	RESIN	15	12	12	800	46
06421/F	64	21	RESIN	25	20	16	3500	78
07016/F	70	16	RESIN	15	12	12	1300	66
08019/F	80	19	RESIN	20	16	14	2200	98
10021/F	100	21	RESIN	25	20	16	3500	164
12025/A	120	25	ALUMINIUM	30	24	18	5000	420
14025/A	140	25	ALUMINIUM	40	32	20	7000	580


* without composite Fibre main bearing

SPECIAL HEADS

On request Antal blocks are supplied with special head: fork head or Wichard HR “snap shackle”.

LONG HEAD


For stand-up connection of ball bearing cars (page 118, 122-126).



MODEL	SHEAVE Ø mm	TYPE	A mm	B mm	D mm
/ L061	60	SINGLE	6	11.5	12
/ L062	60	DOUBLE / TRIPLE	8	14.5	12
/ L071	70	SINGLE	6	11.5	12
/ L072	70	DOUBLE / TRIPLE	8	14.5	14
/ L081	80	SINGLE	8	14.5	14
/ L101	100	SINGLE	10	18	16.5

FORK HEAD


It is made in s.steel and comes complete with pin and safety ring. This solution is available for single and fiddle blocks only.



MODEL	SHEAVE Ø mm	A mm	B mm	D mm
/ F061	60	8	16	6
/ F071	70	10	20	8
/ F081	80	12	24	10
/ F101	100	16	30	12
/ F121	120	18	35	14

SNAP SHACKLE

Wichard HR snap shackle. This solution is available for single and fiddle blocks only.



MODEL	SHEAVE Ø mm	A mm	L mm
/ W051*	50	16	45
/ W061*	60	16	45
/ W071**	70	16	45
/ W081**	80	21	60
/ W101**	100	26	80

* AISI 316 snap shackle ** Wichard HR snap shackle

CAM-CLEAT

It is available for all the 60 and 70 mm diameter models. Adjustable in 3 positions. Specify if it is for a single, double or triple block.



MODEL	SHEAVE Ø mm	WEIGHT kg
00520	50	0.08
00620	60	0.13
00720	70	0.13

50 mm sheave for 10 mm line Safe working load = 600 kg



Mod. 00501

SWIVEL BLOCK
Weight* = 90 gr
5 mm shackle
SWL = 600 kg



Mod. 00502

BECKET BLOCK
Weight* = 104 gr
5 mm shackle
SWL = 600 kg



Mod. 00507

SINGLE FIDDLE
Weight* = 122 gr
5 mm shackle
SWL = 600 kg



Mod. 00508

BECKET FIDDLE
Weight* = 136 gr
5 mm shackle
SWL = 600 kg



In the OPF 50 series sheaves are riveted and not removable.



Mod. 00503

DOUBLE SHEAVE
Weight* = 169 gr
6 mm shackle
SWL = 800 kg



Mod. 00504

DOUBLE BECKET
Weight* = 184 gr
6 mm shackle
SWL = 800 kg



Mod. 00505

TRIPLE SHEAVE
Weight* = 225 gr
6 mm shackle
SWL = 800 kg



Mod. 00506

TRIPLE BECKET
Weight* = 240 gr
6 mm shackle
SWL = 800 kg




Mod. 00509

SIMPLE WEB
Weight = 64 gr
For line connection
SWL = 600 kg



Mod. 00510

WEB BECKET
Weight = 78 gr
For line connection
SWL = 600 kg



Mod. 00520

CAM CLEAT
For blocks with cleat add /C to the block model code.
With 3 different positions for single, double and triple.
SWL = 100 kg
Weight = 80 gr



Mod. 00511

Foot Block

Weight** = 62 gr
2 x Ø6 mm screws***
SWL = 600 kg



Mod. 00512

DOUBLE FOOT

Weight** = 132 gr
3 x Ø6 mm screws***
SWL = 600 kg



Mod. 00513

BLOCK U-BOLT

Weight** = 138 gr
2 x Ø5 mm screws***
SWL = 500 kg



Mod. 00516

VERTICAL FIX

Weight** = 65 gr
2 x Ø6 mm screws***
SWL = 600 kg



Mod. 00517

UP-DOWN

Weight** = 80 gr
2 x Ø6 mm screws***
SWL = 600 kg



Mod. 7105


Page 182



SY Scho-ka-kola, RP 57, Skagerrak 2Star Race, Norway


Swivel head locks and shackles are always included, but they are available separately.

Mod. 0051L



Longitudinal or transversal head lock for single blocks.

Mod. 0062L



Longitudinal or transversal head lock for double and triple blocks.



Mod. 005SS



5 mm shackle (Aisi 316)

For single blocks
SWL = 600 kg
Weight = 15 gr

Mod. 006SS



6 mm shackle (Aisi 316)

For double and triple blocks
SWL = 800 kg
Weight = 26 gr

60 mm sheave for 12 mm line

Safe working load = 800 kg



Mod. 00601

SWIVEL BLOCK
Weight* = 0.16 kg
6 mm shackle
SWL = 800 kg



Mod. 00602

BECKET BLOCK
Weight* = 0.18 kg
6 mm shackle
SWL = 800 kg



Mod. 00607

SINGLE FIDDLE
Weight* = 0.21 kg
6 mm shackle
SWL = 800 kg



Mod. 00608

BECKET FIDDLE
Weight* = 0.23 kg
6 mm shackle
SWL = 800 kg



Mod. 00603

DOUBLE SHEAVE
Weight* = 0.31 kg
8 mm shackle
SWL = 1300 kg



Mod. 00604

DOUBLE BECKET
Weight* = 0.33 kg
8 mm shackle
SWL = 1300 kg



Mod. 00605

TRIPLE SHEAVE
Weight* = 0.41 kg
8 mm shackle
SWL = 1300 kg



Mod. 00606

TRIPLE BECKET
Weight* = 0.43 kg
8 mm shackle
SWL = 1300 kg




Mod. 00609

SIMPLE WEB
Weight = 0.10 kg
For line connection
SWL = 800 kg



Mod. 00610

WEB BECKET
Weight = 0.12 kg
For line connection
SWL = 800 kg



Mod. 00620

CAM CLEAT
For blocks with cleat add /C to the block model code.
With 3 different positions for single, double and triple.
SWL = 150 kg
Weight = 0.13 kg



Mod. 00613

BLOCK U-BOLT
Weight = 0.22 kg
2 x Ø6 mm screws
SWL = 800 kg



Mod. 7106
Pag 182



Mod. 00614

BLOCK PAD-EYE
Weight = 0.26 kg
2 x Ø6 mm screws
SWL = 800 kg



Mod. 7206
Page 183




Mod. 00615

BLOCK SCREWED
Weight = 0.39 kg
2 x Ø6 mm screws
SWL = 800 kg




Mod. 7306
Page 183



Mod. 00611

FOOT BLOCK
Weight = 0.13 kg
2 x Ø6 mm screws
SWL = 800 kg



Mod. 00612

DOUBLE FOOT
Weight = 0.22 kg
3 x Ø6 mm screws
SWL = 800 kg



Mod. 00616

VERTICAL FIX
Weight = 0.14 kg
2 x Ø6 mm screws
SWL = 800 kg



Mod. 00617


UP-DOWN
Weight = 0.15 kg
2 x Ø6 mm screws
SWL = 800 kg



Cantiere Bonin - 31' Cossutti


Swivel head locks and shackles are always included, but they are available separately.

Mod. 0061L



Longitudinal or transversal head lock for single blocks.

Mod. 0082L



Longitudinal or transversal head lock for double and triple blocks.



Mod. 006SS



6 mm shackle (Aisi 316)
For single blocks
SWL = 800 kg
Weight = 26 gr

Mod. 008SS



8 mm shackle (Aisi 316)
For double and triple blocks
SWL = 1300 kg
Weight = 62 gr

70 mm sheave for 12 mm line

Safe working load = **1300 kg**



Mod. 00701

SWIVEL BLOCK

Weight* = 0.20 kg

6 mm HR shackle

SWL = 1300 kg



Mod. 00702

BECKET BLOCK

Weight* = 0.22 kg

6 mm HR shackle

SWL = 1300 kg



Mod. 00707

SINGLE FIDDLE

Weight* = 0.26 kg

6 mm HR shackle

SWL = 1300 kg



Mod. 00708

BECKET FIDDLE

Weight* = 0.28 kg

6 mm HR shackle

SWL = 1300 kg



Mod. 00703

DOUBLE SHEAVE

Weight* = 0.38 kg

8 mm HR shackle

SWL = 2200 kg



Mod. 00704

DOUBLE BECKET

Weight* = 0.40 kg

8 mm HR shackle

SWL = 2200 kg



Mod. 00705

TRIPLE SHEAVE

Weight* = 0.50 kg

8 mm HR shackle

SWL = 2200 kg



Mod. 00706

TRIPLE BECKET

Weight* = 0.52 kg

8 mm HR shackle

SWL = 2200 kg



Mod. 00709

SIMPLE WEB

Weight = 0.14 kg

For line connection

SWL = 1300 kg



Mod. 00710

WEB BECKET

Weight = 0.16 kg

For line connection

SWL = 1300 kg



Mod. 00720


CAM CLEAT

For blocks with cleat add /C to the block model code.

With 3 different positions for single, double and triple.

SWL = 150 kg


Weight = 0.15 kg






Swivel head locks and shackles are always included, but they are available separately.

Mod. 0061L



Longitudinal or transversal head lock for single blocks.

Mod. 0082L



Longitudinal or transversal head lock for double and triple blocks.



Mod. 006HR



6 mm HR shackle
For single blocks
SWL = 1300 kg
Weight = 26 gr

Mod. 008HR



8 mm HR shackle
For double and triple blocks
SWL = 2200 kg
Weight = 62 gr

80 mm sheave for 14 mm line

Safe working load = 2200 kg



Mod. 00801

SWIVEL BLOCK
Weight* = 0.34 kg
8 mm HR shackle
SWL = 2200 kg



Mod. 00807

SIMPLE FIDDLE
Weight* = 0.44 kg
8 mm HR shackle
SWL = 2200 kg



Mod. 00809

SIMPLE WEB
Weight = 0.22 kg
For line connection
SWL = 2200 kg



Mod. 00802

BECKET BLOCK
Weight* = 0.38 kg
8 mm HR shackle
SWL = 2200 kg



Mod. 00808

BECKET FIDDLE
Weight* = 0.48 kg
8 mm HR shackle
SWL = 2200 kg



Mod. 00810

WEB BECKET
Weight = 0.26 kg
For line connection
SWL = 2200 kg



Mod. 00813

BLOCK U-BOLT
Weight = 0.54 kg
2 x Ø10 mm screws
SWL = 2200 kg



Mod. 7110

Page 182



Mod. 00814

BLOCK PAD-EYE
Weight = 0.61 kg
4 x Ø8 mm screws
SWL = 2200 kg




Mod. 7210

Page 183




Mod. 00815

BLOCK SCREWED
Weight = 0.93 kg
4 x Ø8 mm screws
SWL = 2200 kg



Mod. 7310

Page 183



Mod. 00811

FOOT BLOCK
Weight = 0.29 kg
4 x Ø8 mm screws
SWL = 2200 kg



Mod. 00812

DOUBLE FOOT
Weight = 0.57 kg
4 x Ø8 mm screws
SWL = 2200 kg




Mod. 00816

VERTICAL FIX
Weight = 0.27 kg
2 x Ø10 mm screws
SWL = 2200 kg

Mod. 008HR

HR Ø8 mm shackle
SWL = 2200 kg
Weight = 62 gr



Mod. 0081L

For longitudinal
or transversal
head lock



Mod. 00803

full scale

DOUBLE BLOCK
Weight* = 0.54 kg
10 mm HR shackle
SWL = 3500 kg


100 mm sheave for 16 mm line Safe working load = 3500 kg



Mod. 01001

SWIVEL BLOCK
Weight* = 0.63 kg
10 mm HR shackle
SWL = 3500 kg

Swivel head lock
and shackle is
always included.



Mod. 010HR

HR Ø10 mm shackle
SWL = 3500 kg
Weight = 114 gr

Mod. 0101L

For longitudinal
or transversal
head lock



Mod. 01002

BECKET BLOCK
Weight* = 0.70 kg
10 mm HR shackle
SWL = 3500 kg



Mod. 01007

SIMPLE FIDDLE
Weight* = 0.90 kg
10 mm HR shackle
SWL = 3500 kg



Mod. 01008

BECKET FIDDLE
Weight* = 0.90 kg
10 mm HR shackle
SWL = 3500 kg



Mod. 01003

DOUBLE BLOCK
Weight* = 1.02 kg
12 mm HR shackle
SWL = 5000 kg



Mod. 01009

SIMPLE WEB
Weight = 0.41 kg
For line connection
SWL = 3500 kg



Mod. 01010

WEB BECKET
Weight = 0.48 kg
For line connection
SWL = 3500 kg



Mod. 01014

BLOCK PAD-EYE
Weight = 1.01 kg
4 x Ø8 mm screws
SWL = 3500 kg




Mod. 01015

BLOCK SCREWED
Weight = 1.35 kg
4 x Ø10 mm screws
SWL = 3500 kg



Mod. 7212

Page 183



Mod. 7312

Page 183



Mod. 01011

FOOT BLOCK
Weight = 0.46 kg
Screws = 4xØ10 mm +
1xØ8 mm
SWL = 3500 kg



Mod. 01012

DOUBLE FOOT
Weight = 1.04kg
Screws = 4xØ10 mm +
1xØ8 mm
SWL = 3500 kg



Mod. 01016

VERTICAL FIX
Weight = 0.50 kg
2 x Ø12 mm screws
SWL = 3500 kg



* With shackle

120 mm sheave for 18 mm line Safe working load = 5000 kg



Mod. 01201

SWIVEL BLOCK
Weight* = 1.08 kg
12 mm HR shackle
SWL = 5000 kg



Mod. 01209

SIMPLE WEB
Weight = 0.74 kg
For line connection
SWL = 5000 kg



Mod. 01214

BLOCK PAD-EYE
Weight = 1.70 kg
4 x Ø10 mm screws
SWL = 5000 kg



Mod. 7214
Page 183



Mod. 01211

FOOT BLOCK
Weight = 0.80 kg
5 x Ø10 mm screws
SWL = 5000 kg



Mod. 01216

VERTICAL FIX
Weight = 0.90 kg
2 x Ø14 mm screws
SWL = 5000 kg



Mod. 01202

BECKET BLOCK
Weight* = 1.22 kg
12 mm HR shackle
SWL = 5000 kg




Mod. 01210

WEB BECKET
Weight = 0.88 kg
For line connection
SWL = 5000 kg



Mod. 01215

BLOCK SCREWED
Weight = 2.00 kg
4 x Ø10 mm screws
SWL = 5000 kg




Mod. 7314
Page 183



Mod. 01212

DOUBLE FOOT
Weight = 1.68 kg
5 x Ø10 mm screws
SWL = 5000 kg

Swivel head lock and shackle is always included.



Mod. 012HR

HR Ø12 mm shackle
SWL = 5000 kg
Weight = 186 gr

Mod. 0121L

For longitudinal or transversal head lock



full scale

140 mm sheave for 20 mm line Safe working load = 7000 kg



Mod. 01401

SWIVEL BLOCK
Weight* = 1.50 kg
14 mm HR shackle
SWL = 7000 kg

Swivel head lock
and shackle is
always included.



Mod. 014HR

HR Ø14 mm shackle
SWL = 7000 kg
Weight = 298 gr

Mod. 0141L

For longitudinal
or transversal
head lock



Mod. 01402

BECKET BLOCK
Weight* = 1.70 kg
14 mm HR shackle
SWL = 7000 kg



Mod. 01409

SIMPLE WEB
Weight = 1.08 kg
For line connection
SWL = 7000 kg



Mod. 01410

WEB BECKET
Weight = 1.28 kg
For line connection
SWL = 7000 kg



Mod. 01414

BLOCK PAD-EYE
Weight = 2.60 kg
6 x Ø10 mm screws
SWL = 7000 kg



Mod. 01415

BLOCK SCREWED
Weight = 3.70 kg
6 x Ø10 mm screws
SWL = 7000 kg



Mod. 7216

Page 183



Mod. 7316

Page 183



Mod. 01411

FOOT BLOCK
Weight = 1.25 kg
5 x Ø12 mm screws
SWL = 7000 kg



Mod. 01412

DOUBLE FOOT
Weight = 2.60 kg
5 x Ø12 mm screws
SWL = 7000 kg



mainsheet systems

MAINSHEET SYSTEM

These systems are particularly suitable for the mainsheet control.

2 Sizes are available:

Size 60 for boats up to 36 ft and lines up to $\varnothing=10$ mm, main sheave with Cam-Cleat $\varnothing=60$ mm, secondary sheave $\varnothing=50$ mm, safe working load SWL = 800 kg.

Size 75 for boats up to 40 ft and lines up to $\varnothing=12$ mm, main sheave with Cam-Cleat $\varnothing=75$ mm, secondary sheave $\varnothing=60$ mm, safe working load SWL = 1000 kg.

All sheaves are made of HRM resin with 2 races of ball bearings.



E6



E7



E8

COMPLETE SYSTEMS

MODEL	POWER	SWL kg	PRIMARY SHEAVE \varnothing mm	SECONDARY SHEAVE \varnothing mm
E6/60	6 : 1	800	60	50
E6/75	6 : 1	1000	75	60
E7/60	7 : 1	800	60	50
E7/75	7 : 1	1000	75	60
E8/60	8 : 1	800	60	50
E8/75	8 : 1	1000	75	60

TWO SPEED MAINSHEET TACKLE : 4/8 AND 6/18


The particular configuration adopted permits the use of large diameter sheaves which improve performance of the system; it also ensures maximum block orientation capabilities and therefore the possibility to operate on both sides of the boat. Furthermore,

this reduces the necessary sheet length. The two speeds are controlled by means of two independent lines.

Use 10 mm line for the first speed and 6 mm line for the second speed.

For boats up to 36 ft

For boats up to 40 ft

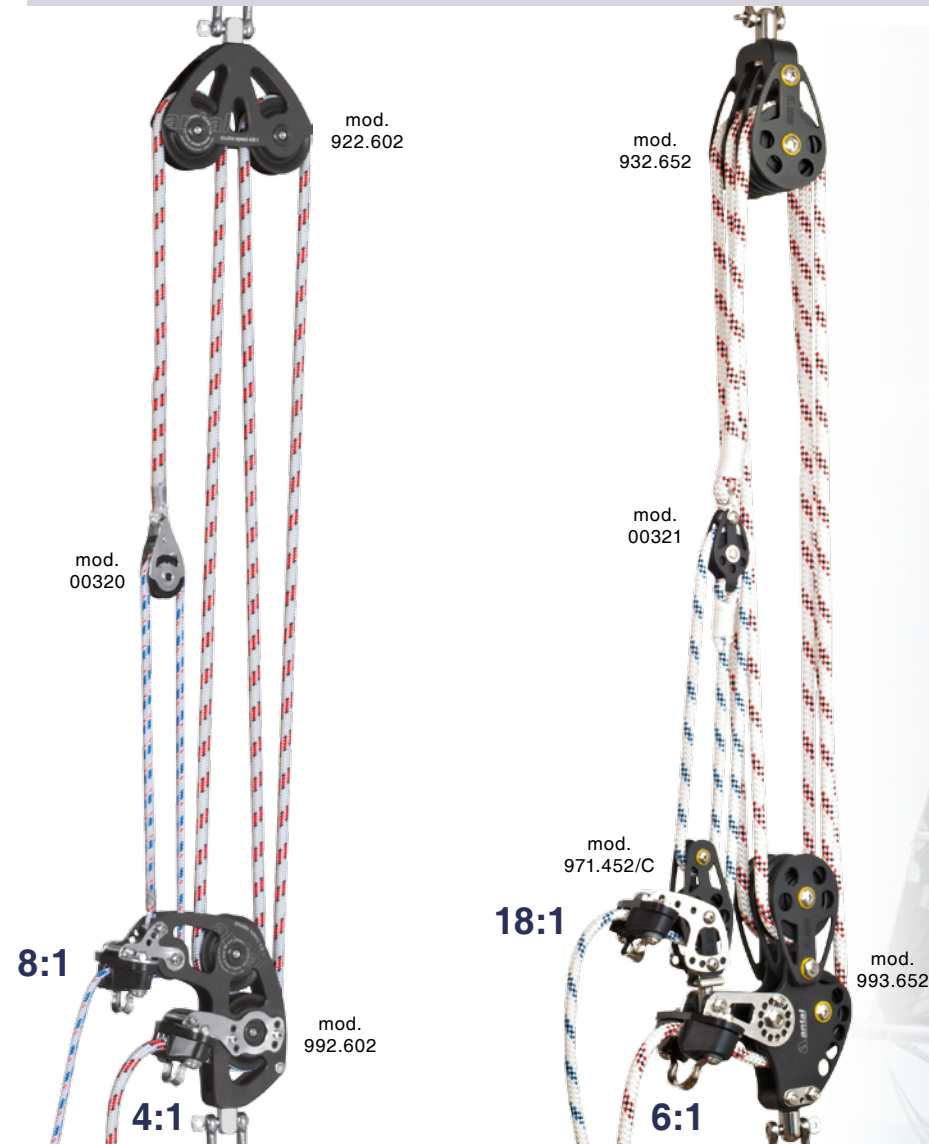

F4	MODEL	F6
4 : 1	1 st SPEED	6 : 1
8 : 1	2 st SPEED	18 : 1
800	SWL (Kg)	1000
60	SHEAVE Ø (mm)	65
0.88	TOTAL WEIGHT (Kg)	1.54



XXL blocks

COMPOSITE FIBRE SERIES

The whole “composite fibre” range uses sheaves on composite fibre bearings and double self-captive Delrin ball thrust bearings.

The sheaves are easy to dismantle for cleaning and need no lubrication.

The sides are made of 3571 TA16 light alloy and are thickly anodized to ensure absolute wear-and corrosion proofing, with all the edges smoothed off for better handling.

The nuts and bolts have been replaced with recessed screws and pins, considerably reducing weight and eliminating any projecting parts.


The steel coupling revolves on a fibre washer and can easily be locked in one of two main positions.



HIGH-STRENGTH ALUMINIUM SHEAVES

Sizes 150, 180, 220 and 250 mm use thickly anodized aluminium sheaves. The main bearing is made of high-strength composite fibre impregnated with self-lubricating substances. A double lateral Delrin ball bearing makes the sheaves slide perfectly smoothly.

Sheaves are supplied with the s.steel central hub, they are available separately.

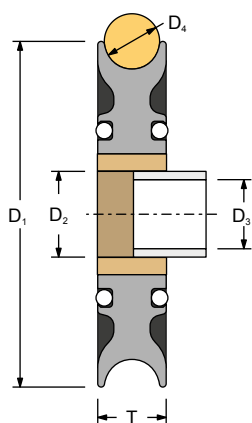

Vm50 Vismara

SHEAVE MODEL	D ₁ mm	MATERIAL	T mm	D ₂ mm	D ₃ mm	D ₄ mm	WEIGHT kg	SWL kg
15029/A	150	ALUMINIUM	29	40	34	20	0.90	6500
18035/A	180	ALUMINIUM	35	50	40	24	1.40	9000
21843/A	220	ALUMINIUM	40	50	40	33	3.20	13000
24856/A	250	ALUMINIUM	56	65	48	40	4.70	20000

XXL blocks 150

150 mm sheave for 20 mm line Safe working load = 6500 kg



Mod. 911.154

SINGLE BLOCK
Weight = 1.80 kg
Swivel head for
14 mm HR shackle
SWL = 6500 kg



Mod. 941.154

BLOCK WITH BECKET
Weight = 2.00 kg
Swivel head for
14 mm HR shackle
SWL = 6500 kg



Mod. 981.154

FIDDLE WITH BECKET
Weight = 2.80 kg
Swivel head for
14 mm HR shackle
SWL = 6500 kg



Mod. 910.155/Z

WEB BLOCK
"Strengthened"
Weight = 1.90 kg
For line connection
SWL = 8000 kg



Mod. 940.155/Z

WEB WITH BECKET
"Strengthened"
Weight = 2.02 kg
For line connection
SWL = 8000 kg



Mod. 812.154

BLOCK ON PAD-EYE
Weight = 3.10 kg
6 x Ø10 mm screws
SWL = 6500 kg



Mod. 813.154

**BLOCK ON SCREWED
PAD-EYE**
Weight = 4.10 kg
6xØ10 mm screws
SWL = 6500 kg

Mod. 7216

Page 183




Mod. 7316

Page 183



Mod. 831.154

DECK BLOCK
Weight = 1.40 kg
Screws = 2xØ12 +
1xØ14 mm
SWL = 6500 kg



Mod. 832.154

**DOUBLE
DECK BLOCK**
Weight = 2.30 kg
Screws = 2 x Ø12 +
1 x Ø14 mm
SWL = 6500 kg

Mod. 815.150

HALYARD BLOCK
Weight = 3.30 kg
4 x Ø12 mm screws
SWL = 6500 kg



full scale



XXL blocks 180

180 mm sheave for 24 mm line Safe working load = 9000 kg



Mod. 911.184

SINGLE BLOCK

Weight = 2.85 kg

Swivel head for
16 mm HR shackle

SWL = 9000 kg




Mod. 941.184

BLOCK WITH BECKET

Weight = 3.20 kg

Swivel head for
16 mm HR shackle

SWL = 9000 kg



Mod. 910.185

WEB BLOCK

Weight = 2.60 kg

For line connection

SWL = 9000 kg



Mod. 940.185

WEB WITH BECKET

Weight = 2.70 kg

For line connection

SWL = 9000 kg



Mod. 812.184

BLOCK ON PAD-EYE

Weight = 5.25 kg

6 x Ø10 mm screws

SWL = 9000 kg

Mod. 7220

Page 183



Mod. 813.184

BLOCK ON SCREWED PAD-EYE


Weight = 6.60 kg

6 x Ø10 mm screws

SWL = 9000 kg

Mod. 7320

Page 183



Mod. 831.184

DECK BLOCK

Weight = 2.30 kg

Screws = 2xØ14 +
1xØ16 mm

SWL = 9000 kg



Mod. 832.184

DOUBLE DECK BLOCK

Weight = 3.65 kg

Screws = 2 x Ø14 +
1 x Ø16 mm

SWL = 9000 kg

full scale

antal
MADE IN

XXL blocks 220 / 250

220 mm sheave for 30 mm line Safe working load = 13000 kg



Mod. 911.224

SINGLE BLOCK
Weight = 9.60 kg
Swivel head for
20 mm HR shackle
SWL = 13000 kg



Mod. 941.224

BLOCK WITH BECKET
Weight = 10.20 kg
Swivel head for
20 mm HR shackle
SWL = 13000 kg

full scale
220 mm



Mod. 910.225

WEB BLOCK
Weight = 7.65 kg
For line connection
SWL = 13000 kg



Mod. 940.225

WEB WITH BECKET
Weight = 8.25 kg
For line connection
SWL = 13000 kg

250 mm sheave for 40 mm line Safe working load = 20000 kg



Mod. 911.254

SINGLE BLOCK
Weight = 14.35 kg
Swivel head for
24 mm HR shackle
SWL = 20000 kg



Mod. 941.254

BLOCK WITH BECKET
Weight = 15.05 kg
Swivel head for
24 mm HR shackle
SWL = 20000 kg



Mod. 910.255

WEB BLOCK
Weight = 10.35 kg
For line connection
SWL = 20000 kg



Mod. 940.255

WEB WITH BECKET
Weight = 11.05 kg
For line connection
SWL = 20000 kg

looper series

LOOPER is an ultralight one-piece-frame block provided with a dyneema Snap-Loop for fast, easy and safe connections.

Characteristics:

- hard black anodized one-piece-aluminium frame;
- resin sheave on composite fibre bushing and double side ball bearings;
- Dyneema Snap-Loop.

THE ONE PIECE FRAME

The one-piece aluminium extruded body is the strongest and lightest solution, no assembling pin rivets or screws and nuts.
CNC machined - polished - hard black anodized and teflon coated.

THE COMPOSITE FIBRE SHEAVE

The resin (aluminium on larger mod) sheave runs on the main Composite Fibre bearing and on a ground s.steel hub: low friction, high-loads and no lubricant required.

The self-captive side ball bearing reduces the friction and makes disassembling, cleaning and maintenance very easy.

Sheaves are supplied with the s.steel hub, they are available separately.



For a “tied looper” the block without Snap-Loop is also available, the line is not included.

For this version without snap-loop replace **LS** with **LL** in the model number.

For Example:

LS1080 is the 80 mm Looper with Snap-Loop,
LL1080 is the same without Snap-Loop.

SNAP LOOP AND DOG-BONE FASTENINGS

Dyneema Snap Loops including “Dog-Bone” aluminium fastenings are available.


Dog-Bone fastenings are also available separately so that Loops of any length can be prepared.

SNAP LOOP

These snap loops are obtained with a spliced Dyneema line without cover and an aluminium dog-bone.



mod. LS2070




MODEL	DYNEEMA Ø mm	BL kg	SWL* kg	L mm	WEIGHT gr
LS2060	4	3000	1000	100	11
LS2070	5	5200	1600	110	20
LS2080	6	6600	2200	125	44
LS2100	8	11000	3500	160	81

* The Safe Working Load SWL is 1/3 of the breaking load, obtained from traction tests on a new Loop.

DOG-BONE

You can prepare your special snap loop using Antal aluminium dog-bones, separately available.



MODEL	FOR DYNEEMA Ø mm	Ø mm	L mm	WEIGHT gr
LS2062	4	6.5	30	3
LS2072	5	8.0	37	6
LS2082	6	10.0	46	13
LS2102	8	11.5	55	22
LS2122	10	13.5	67	36
LS2142	12	16.0	79	55

DYNEEMA PAD-EYE

Special eye-strap designed for Dyneema Loop, aluminium made, hard black anodizing. For more information, see pag. 168



looper

SIZE 60

sheave diameter = 60 mm
line diameter = 10 mm
SWL = 1000 kg



Mod. LS2060

4 mm DYNEEMA LOOP
Weight = 11 gr



Mod. LS1060

SIMPLE
Weight* = 106 gr



Mod. LS1062

DOUBLE
Weight* = 196 gr



Mod. LS1061

SIMPLE BECKET
Weight* = 116 gr



Mod. LS1063

DOUBLE BECKET
Weight* = 206 gr

SIZE 70

sheave diameter = 70 mm
line diameter = 12 mm
SWL = 1600 kg



Mod. LS2070

5 mm DYNEEMA LOOP
Weight = 20 gr



Mod. LS1070

SIMPLE
Weight* = 155 gr



Mod. LS1072

DOUBLE
Weight* = 285 gr



Mod. LS1071

SIMPLE BECKET
Weight* = 172 gr



Mod. LS1073

DOUBLE BECKET
Weight* = 302 gr

SIZE 80

sheave diameter = 80 mm
line diameter = 14 mm
SWL = 2200 kg



Mod. LS2080

6 mm DYNEEMA LOOP
Weight = 44 gr



Mod. LS1080

SIMPLE
Weight* = 268 gr



Mod. LS1082

DOUBLE
Weight* = 490 gr



Mod. LS1081

SIMPLE BECKET
Weight* = 290 gr




Mod. LS1083

DOUBLE BECKET
Weight* = 510 gr

SIZE 100

sheave diameter = 100 mm
line diameter = 16 mm
SWL = 3500 kg



Mod. LS2100

8 MM DYNEEMA LOOP
Weight = 81 gr



Mod. LS1100

SIMPLE
Weight* = 438 gr



Mod. LS1101

SIMPLE BECKET
Weight* = 473 gr

SIZE 120

sheave diameter = 120 mm
line diameter = 18 mm
SWL = 6000 kg



Mod. LS2120

10 MM DYNEEMA LOOP
Weight = 150 gr



Mod. LS1120

SIMPLE
Weight* = 890 gr



Mod. LS1121

SIMPLE BECKET
Weight* = 925 gr


SIZE 140

sheave diameter = 140 mm
line diameter = 20 mm
SWL = 8000 kg



Mod. LS2140

12 MM DYNEEMA LOOP
Weight = 219 gr

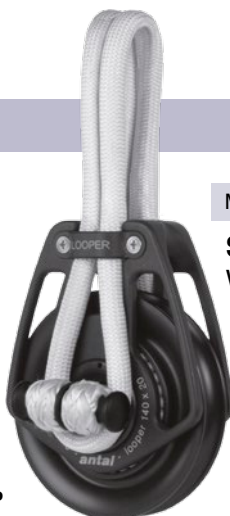

Mod. LS1140

SIMPLE
Weight* = 1129 gr



Mod. LS1141

SIMPLE BECKET
Weight* = 1179 gr

A316 s.steel series

CLASSIC LINE

This stainless steel series, with a traditional design, is conceived especially for classic boats.

The line includes 6 different sizes with diameters from 65 to 180 mm and Safe Working Load up to 9000 kg.

Perfectly polished AISI 316 stainless steel cheekplates and accessories, fully rounded corners for greater manageability, nuts and bolts replaced by pins and recessed screws to eliminate any protruding parts.

Each size is available in numerous versions as described in the following pages.



CAM CLEAT

All models can be supplied with cam cleat. Just add **/C** to the model code when ordering.



SHEAVES

Resin or aluminium sheaves in larger models are easy to dismantle and work on a main composite fibre bearing and two side ball bearings (self-captive).



Sphinx 12m SI - Robbe & Berking - Germany

s.steel block 65

65 mm sheave for 12 mm line

Safe working load = 800 kg



Mod. S0601

SINGLE BLOCK
Weight = 0.29 kg
Swivel head for
6 mm shackle*
SWL = 800 kg



Mod. S0602

SINGLE WITH BECKET
Weight = 0.32 kg
Swivel head for
6 mm shackle*
SWL = 800 kg

real size



* shackle not included

All models are available
with cam-cleat, add /C to
the model code.



Mod. S0620

CAM-CLEAT
Weight = + 0.18 kg
Max load = 160 kg



Mod. S0615

**BLOCK ON SCREWED
PAD-EYE**
Weight = 0.45 kg
2 x Ø6 mm screws
SWL = 800 kg



Mod. 7306

Page 183 - 77 -



Mod. S0603

DOUBLE BLOCK
Weight = 0.51 kg
Fixed head for
8 mm shackle*
SWL = 1200 kg



Mod. S0604

DOUBLE WITH BECKET
Weight = 0.54 kg
Fixed head for
8 mm shackle*
SWL = 1200 kg



Mod. S0605

TRIPLE BLOCK
Weight = 0.70 kg
Fixed head for
8 mm shackle*
SWL = 1200 kg



Mod. S0606

TRIPLE WITH BECKET
Weight = 0.73 kg
Fixed head for
8 mm shackle*
SWL = 1200 kg



Mod. S0609

WEBBING BLOCK
Weight = 0.25 kg
For line connection
SWL = 800 kg



Mod. S0616

STAND-UP BLOCK
Weight = 0.37 kg
1 x Ø12 mm screw
SWL = 800 kg



Mod. S0611

DECK BLOCK
Weight = 0.30 kg
2 x Ø8 mm screws
SWL = 800 kg



Mod. S0612

DOUBLE DECK BLOCK
Weight = 0.46 kg
2 x Ø8 mm screws
SWL = 800 kg



Mod. S0613

BLOCK ON U-BOLT
Weight = 0.36 kg
2 x Ø6 mm screws
SWL = 800 kg



Mod. 7106

Page 182



Mod. S0614

BLOCK ON PAD-EYE
Weight = 0.38 kg
2 x Ø6 mm screws
SWL = 800 kg



Mod. 7206

Page 183

s.steel block 75

75 mm sheave for 14 mm line

Safe working load = 1500 kg



Mod. S0701

SINGLE BLOCK
Weight = 0.39 kg
Swivel head for
8 mm shackle*
SWL = 1500 kg



Mod. S0702

SINGLE WITH BECKET
Weight = 0.46 kg
Swivel head for
8 mm shackle*
SWL = 1500 kg



Mod. S0703

DOUBLE BLOCK
Weight = 0.68 kg
Fixed head for
10 mm shackle*
SWL = 2300 kg



Mod. S0704

DOUBLE WITH BECKET
Weight = 0.75 kg
Fixed head for
10 mm shackle*
SWL = 2300 kg



Mod. S0705

TRIPLE BLOCK
Weight = 0.91 kg
Fixed head for
10 mm shackle*
SWL = 2300 kg



Mod. S0706

TRIPLE WITH BECKET
Weight = 0.98 kg
Fixed head for
10 mm shackle*
SWL = 2300 kg




Mod. S0711

DECK BLOCK
Weight = 0.35 kg
Screws = 2 x Ø6 +
1 x Ø8 mm
SWL = 1500 kg



Mod. S0712

DOUBLE DECK BLOCK
Weight = 0.62 kg
Screws = 2 x Ø6 +
1 x Ø8 mm
SWL = 1500 kg



Mod. S0731

CLASSIC DECK BLOCK
Weight = 0.86 kg
4 x Ø8 mm screws
SWL = 1500 kg



Mod. S0732

CLASSIC DOUBLE DECK BLOCK
Weight = 1.32 kg
4 x Ø8 mm screws
SWL = 1500 kg



Mod. S0713

BLOCK ON U-BOLT
Weight = 0.55 kg
2 x Ø8 mm screws
SWL = 1500 kg



Mod. S0714

BLOCK ON PAD-EYE
Weight = 0.65 kg
4 x Ø6 mm screws
SWL = 1500 kg



Mod. S0715

BLOCK ON SCREWED PAD-EYE
Weight = 0.95 kg
4 x Ø6 mm screws
SWL = 1500 kg



Mod. 7108

Page 182



Mod. 7208

Page 183



Mod. 7308

Page 183



real size

* shackle not included

Deck blocks are available with runner's eyebolt, add /V to the model code.



All models are available with cam-cleat, add /C to the model code.

Mod. S0720

CAM-CLEAT
Weight = + 0.36 kg
Max load = 160 kg



s.steel block 90

90 mm sheave for 16 mm line Safe working load = 2500 kg



Mod. S0901

SINGLE BLOCK
Weight = 0.73 kg
Swivel head for
10 mm shackle*
SWL = 2500 kg



Mod. S0902

SINGLE WITH BECKET
Weight = 0.85 kg
Swivel head for
10 mm shackle*
SWL = 2500 kg



Mod. S0903

DOUBLE BLOCK
Weight = 1.13 kg
Fixed head for
12 mm shackle*
SWL = 3300 kg



Mod. S0904

DOUBLE WITH BECKET
Weight = 1.25 kg
Fixed head for
12 mm shackle*
SWL = 3300 kg




Mod. S0905

TRIPLE BLOCK
Weight = 1.70 kg
Fixed head for
12 mm shackle*
SWL = 3300 kg



Mod. S0906

TRIPLE WITH BECKET
Weight = 1.83 kg
Fixed head for
12 mm shackle*
SWL = 3300 kg



Mod. S0911

DECK BLOCK
Weight = 0.70 kg
Screws = 2 x Ø8 +
1 x Ø10 mm
SWL = 2500 kg



Mod. S0912

DOUBLE DECK BLOCK
Weight = 1.18 kg
Screws = 2 x Ø8 +
1 x Ø10 mm
SWL = 2500 kg



Mod. S0931

**CLASSIC
DECK BLOCK**
Weight = 1.40 kg
4 x Ø8 mm screws
SWL = 2500 kg



Mod. S0932

**CLASSIC
DOUBLE DECK BLOCK**
Weight = 2.18 kg
4 x Ø8 mm screws
SWL = 2500 kg



Mod. S0914

BLOCK ON PAD-EYE
Weight = 1.05 kg
4 x Ø8 mm screws
SWL = 2500 kg




Mod. 7210

Page 183



Mod. S0915

**BLOCK ON SCREWED
PAD-EYE**
Weight = 1.33 kg
4 x Ø8 mm screws
SWL = 2500 kg



Mod. 7310

Page 183

real size



* shackle not included



Deck blocks are available with runner's eyebolt, add /V to the model code.

s.steel block 120

120 mm sheave for 18 mm line Safe working load = 4500 kg



Mod. S1201

SINGLE BLOCK
Weight = 1.28 kg
Swivel head for
12 mm HR shackle*
SWL = 4500 kg



Mod. S1202

SINGLE WITH BECKET
Weight = 1.46 kg
Swivel head for
12 mm HR shackle*
SWL = 4500 kg

real size




Mod. S1203

DOUBLE BLOCK
Weight = 1.95 kg
Fixed head for
14 mm HR shackle*
SWL = 6000 kg



Mod. S1204

DOUBLE WITH BECKET
Weight = 2.13 kg
Fixed head for
14 mm HR shackle*
SWL = 6000 kg



Mod. S1211


DECK BLOCK
Weight = 1.13 kg
Screws = 2 x Ø10 +
1 x Ø12 mm
SWL = 4500 kg



Mod. S1212

DOUBLE DECK BLOCK
Weight = 1.74 kg
Screws = 2 x Ø10 +
1 x Ø12 mm
SWL = 4500 kg

Deck blocks are available with runner's eyebolt, add /V to the model code.



Mod. S1231

CLASSIC DECK BLOCK
Weight = 2.15 kg
4 x Ø10 mm screws
SWL = 4500 kg



Mod. S1232

CLASSIC DOUBLE DECK BLOCK
Weight = 3.70 kg
4 x Ø10 mm screws
SWL = 4500 kg



Mod. S1214

BLOCK ON PAD-EYE
Weight = 2.28 kg
4 x Ø10 mm screws
SWL = 4500 kg



Mod. S1215

BLOCK ON SCREWED PAD-EYE
Weight = 2.58 kg
4 x Ø10 mm screws
SWL = 4500 kg



Mod. 7214
Page 183



Mod. 7314
Page 183

* shackle not included



s.steel block 150

150 mm sheave for 20 mm line Safe working load = 6500 kg

real size



Mod. S1501

SINGLE BLOCK
Weight = 2.74 kg
Swivel head for
14 mm HR shackle*
SWL = 6500 kg



Mod. S1502

SINGLE WITH BECKET
Weight = 3.04 kg
Swivel head for
14 mm HR shackle*
SWL = 6500 kg




Mod. S1511

DECK BLOCK
Weight = 2.13 kg
Screws = 2 x Ø12 +
1 x Ø14 mm
SWL = 6500 kg



Mod. S1512

DOUBLE DECK BLOCK
Weight = 3.50 kg
Screws = 2 x Ø12 +
1 x Ø14 mm
SWL = 6500 kg



Mod. S1531

CLASSIC DECK BLOCK
Weight = 4.57 kg
4 x Ø12 mm screws
SWL = 6500 kg



Mod. S1532

CLASSIC DOUBLE DECK BLOCK
Weight = 7.91 kg
4 x Ø12 mm screws
SWL = 6500 kg



Deck blocks are available with runner's eyebolt, add /V to the model code.



Mod. S1514

BLOCK ON PAD-EYE
Weight = 4.71 kg
6 x Ø10 mm screws
SWL = 6500 kg




Mod. 7216
Page 183



Mod. S1515

BLOCK ON SCREWED PAD-EYE
Weight = 6.24 kg
6 x Ø10 mm screws
SWL = 6500 kg



Mod. 7316
Page 183

* shackle not included

s.steel block 180

180 mm sheave for 24 mm line Safe working load = 9000 kg



Mod. S1801

SINGLE BLOCK

Weight = 4.11 kg

Swivel head for

16 mm HR shackle*

SWL = 9000 kg



Mod. S1802

SINGLE WITH BECKET


Weight = 4.61 kg

Swivel head for

16 mm HR shackle*

SWL = 9000 kg

real size



Mod. S1811

DECK BLOCK

Weight = 3.31 kg

Screws = 2 x Ø14 +

1 x Ø16 mm

SWL = 9000 kg



Mod. S1812

DOUBLE DECK BLOCK

Weight = 5.26 kg

Screws = 2 x Ø14 +

1 x Ø16 mm

SWL = 9000 kg



Mod. S1831

CLASSIC

DECK BLOCK

Weight = 6.86 kg

4 x Ø14 mm screws

SWL = 9000 kg



Mod. S1832

CLASSIC DOUBLE

DECK BLOCK

Weight = 11.8 kg

4 x Ø14 mm screws

SWL = 9000 kg



Deck blocks are available with runner's eyebolt, add /V to the model code.



Mod. S1814

BLOCK ON PAD-EYE

Weight = 7.57 kg

6 x Ø10 mm screws

SWL = 9000 kg



Mod. 7220

Page 183



Mod. S1815

BLOCK ON

SCREWED PAD-EYE

Weight = 9.51 kg

6 x Ø10 mm screws

SWL = 9000 kg



Mod. 7320

Page 183

* shackle not included

halyard blocks

HALYARD BLOCKS


This solution, designed for halyards at the base of the mast, keeps the line as close to the deck as possible. A-316 s.steel base.
All these models are fitted with double side ball bearings.



Mod. 815.652

Mod. 815.075

Mod. 815.090



MODEL	Ø LINE mm	D mm	H mm	SWL kg	WEIGHT kg	BOLTS N° x Ø mm
815.452	10	45	14	450	0.08	2 x Ø5
815.552	12	55	16	600	0.12	2 x Ø6
815.652	12	65	18	800	0.17	2 x Ø8
815.075	14	75	22	1500	0.26	2 x Ø8
815.090	16	90	24	2500	0.39	2 x Ø10
815.120	18	120	32	4500	1.20	4 x Ø10
815.150	20	150	41	6500	3.30	4 x Ø12
815.180	24	180	51	9000	4.70	4 x Ø16

MAXI BLOCK D=300 mm

Working load = **30.000 kg**

Weight = 48,50 kg

Custom made for Perini Navi



655 mm

AISI 316 CUSTOM PRODUCTS

Custom s.steel products are available on request.



Perini Navi - State of Grace 40 m

hollow pin deck blocks

HOLLOW PIN DECK BLOCK 75, 90, 120 mm

The sheave rotates on a hollow pin with the line passing through the pin's centre.

This type of arrangement reduces the height of the line off the deck, and the side loads on the block.


The line position and its direction to the winch does not change, even when the sheave is articulated off-centre.

Body completely made in polished s.steel. Sheave on Composite Fibre bearing and two side ball bearing.



Mod. 816.075

Mod. 816.090

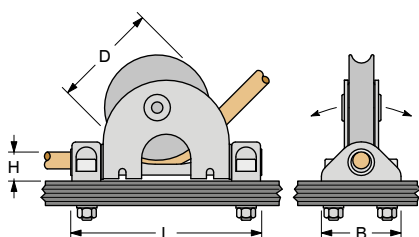

MODEL	Ø LINE mm	D mm	H mm	L mm	B mm	SWL kg	WEIGHT kg	BOLTS N° x Ø mm
816.075	12	75	20	132	60	1500	0.62	4 x Ø8
816.090	14	90	24	157	66	2500	1.15	4 x Ø10
816.120	18	120	32	190	80	4500	1.95	4 x Ø12

HOLLOW PIN DECK BLOCK 150, 180 mm


The larger models with 150 and 180 mm sheaves are equipped with a double base, where each base is fixed with 4 screws.



Mostes 55



Mod. 816.150

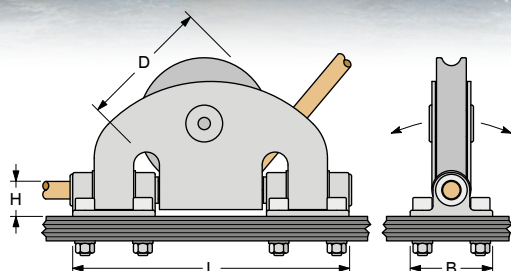

MODEL	Ø LINE mm	D mm	H mm	L mm	B mm	SWL kg	WEIGHT kg	BOLTS N° x Ø mm
816.150	20	150	30	315	94	6500	5.70	8 x Ø10
816.180	22	180	33	373	108	9000	8.70	8 x Ø12

opf hollow pin blocks

HOLLOW PIN DECK BLOCK

The sheave rotates on a hollow pin with the line passing through the pin's centre.

This type of arrangement reduces the height of the line off the deck, and the side loads on the block.

The line position and its direction to the winch does not change, even when the sheave is articulated off-centre.


Body completely made in hard black anodized aluminium.

Sheave on Composite Fibre bearing and two side ball bearing.

Insulating washer under the fixing screws.



Mod. 00821

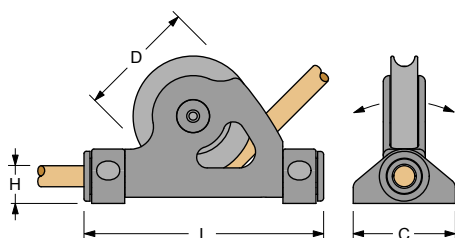

MODEL	Ø LINE mm	D mm	H mm	L mm	C mm	SWL kg	WEIGHT kg	BOLTS N° x Ø mm
00621	12	60	19	121	57	1300	0.28	4 x Ø6
00821	14	80	25	160	68	2200	0.49	4 x Ø8
01021	16	100	29	196	79	3500	0.84	4 x Ø10

HOLLOW PIN DECK BLOCK WITH CAM-CLEAT

The smallest model with 60 mm sheave is also available with a Cam-Cleat, adjustable to three positions.



Mod. 00621/C

MODEL	Ø LINE mm	D mm	H mm	L mm	C mm	SWL kg	WEIGHT kg	BOLTS N° x Ø mm
00621/C	12	60	19	121	57	1300*	0.39	4 x Ø6

* Max load on Cam-Cleat is 150 kg.



mast blocks


MAST BLOCKS

12 different sizes with diameters from 40 to 140 mm for working loads (SWL) up to 9000 kg.

Hard black anodized aluminium frame with insulating washers for corrosion protection.

Resin sheaves (aluminium sheaves for 100, 120 and 140 mm only) with composite fibre main bearing (not on size 40) and double side self-captive ball bearing.

On request custom models for higher loads are also available.



Mod. 00818/Z


MODEL	DIA mm	Ø LINE mm	A mm	B mm	C mm	D mm	E mm	SWL kg	WEIGHT kg	BOLTS N° x Ø mm
00418	40	8	107	58	24.2	18.2	31.5	400*	0.07	2 x Ø6
00518	50	12	118	69.5	29.5	22.5	37	800*	0.12	2 x Ø6
00618	60	12	130	81.5	29.5	22.5	49	800*	0.15	2 x Ø6
00718	70	12	140	91.5	29.5	22.5	53.5	1300*	0.16	2 x Ø6
00718/Z			158					2000*	0.23	3 x Ø6
00818	80	14	162	103	34.5	27	62.5	2200*	0.24	2 x Ø8
00818/Z			187					3000*	0.34	3 x Ø8
01018	100	16	198	126	39	31	81.5	3500*	0.44	2 x Ø10
01018/Z			226					4500*	0.62	3 x Ø10
01218	120	18	251	151	47	37	103	5000*	0.97	3 x Ø10
01218/Z			263					7000*	1.08	3 x Ø12
01418/Z	140	20	286	174	49	39	120	9000*	1.55	3 x Ø12

* Safe Working Load for the sheave

DUAL SHEAVE MAST BLOCK

The Dual sheave mast block with 2 x 40 mm sheaves for lines up to 16 mm solves the problem of the wear of the halyards coming out of the mast.

This solution is also suitable for running a line from above to below deck.



Mod. 00418/D

00418/D	2 x 40	16	198	138	36	28	29	2500**	0.26	2 x Ø8
---------	--------	----	-----	-----	----	----	----	--------	------	--------

** Safe Working Load for the halyard

ORGANIZERS D=40, 50 AND 60 mm

Groups of 2 to 6 sheaves in 3 diameters of 40, 50 and 60 mm.

The 40 and 50 mm sheaves are manufactured in high-strength resin with a double side ball bearing.

The 60 mm sheave is manufactured in aluminium, hard black anodized, with a main composite fibre bearing and 2 side ball bearings.


Mounting screws, nuts and washers are included.

These new organizers do not disassemble after tacking off the screws.

Double version also available, just add /D to the model number.




Mod. D530



D mm	LINE mm	N° SHEAVES	MODEL	LENGTH mm	P mm	WEIGHT kg	SWL kg	BOLTS N° x Ø mm
40	Ø 14	2	D420	111	44	0.18	600	3 x Ø6
		3	D430	155		0.27		4 x Ø6
		4	D440	199		0.33		5 x Ø6
		5	D450	243		0.41		6 x Ø6
		6	D460	287		0.48		7 x Ø6
50	Ø 16	2	D520	133	52	0.26	800	3 x Ø8
		3	D530	185		0.38		4 x Ø8
		4	D540	237		0.50		5 x Ø8
		5	D550	289		0.62		6 x Ø8
		6	D560	341		0.74		7 x Ø8
60	Ø 18	2	D620	160	65	0.44	2200	3 x Ø10
		3	D630	225		0.60		4 x Ø10
		4	D640	290		0.76		5 x Ø10
		5	D650	355		0.93		6 x Ø10
		6	D660	420		1.10		7 x Ø10

TURNING SHEAVES

Mounted aft of a set of rope clutches, the turning sheave redirects each line to the most suitable winch.



MODEL	D mm	H mm	SWL kg	WEIGHT kg	BOLTS N° x Ø mm
821.052	50	33	800	0.10	1 x Ø10
821.062	60	38	1200	0.12	1 x Ø12
821.074	70	44	1800	0.45	4 x Ø8


tulip series

TULIP SERIES SHEAVES

The TULIP sheaves are fixed sheaves that do not turn in the direction of manoeuvres since they accept quite different lead angles.

The choice of a Tulip sheave instead of a revolving block comes from the need to reduce bulk and weight.

The sheave, with an axial bearing in composite fibre and large round bearings (self-captive) in Torlon for side loads, is in anodized and Teflon coated aluminium and can handle very high loads.




MODEL	D mm	Ø LINE mm	d mm	t mm	SWL kg	WEIGHT kg
801.045*	45	12	12	31	1000	0.04
801.060	60	14	15	38	2200	0.16
801.070	70	14	15	38	3000	0.19
801.090	90	14	20	50	5000	0.45
801.110	110	16	30	60	9000	0.83

* The D=45 mm sheave is resin made with Delrin side ball bearings.

TULIP FOOTBLOCK

Base and cover in hard black aluminium, screws nuts and washers included.




MODEL	D mm	Ø LINE mm	L mm	H mm	SWL kg	WEIGHT*	SCREWS N° x Ø mm
819.060	60	14	116	51	1600	0.43	1xØ10 + 2xØ8
819.070	70	14	128	51	2200	0.56	1xØ10 + 2xØ8
819.090	90	14	160	63	3000	1.10	1xØ12 + 2xØ10

* Weight without screws, washers and nuts.

TURNING TULIP SHEAVE

This sheave is fitted with 4 wide Torlon ball bearings, this is the best solution when it is necessary to redirect the line to any angle.



MODEL	D mm	Ø LINE mm	H mm	SWL kg	WEIGHT kg	SCREWS N° x Ø mm
821.070	70	12	52	1400	0.30	1 x Ø12
821.100	100	14	64	3000	0.73	4 x Ø8

tulip organizers

HORIZONTAL TULIP ORGANIZERS


With “Tulip” sheaves organizers can also be made. Batteries from 2 to 6 sheaves are available, with diameters 45 and 60 mm.

The 45 mm sheaves are in high resistance resin, with a “self-captive” double side ball bearing. The 60 mm sheave, with an axial bearing in composite fibre and large round bearings (self-captive) in Torlon for side loads, is in anodized and Teflon-coated aluminium and can handle very high loads.



Mod. T540

Mod. T530



D mm	LINE mm	N° SHEAVES	MODEL	LENGTH mm	P mm	WEIGHT* kg	SWL kg	BOLTS N° x Ø mm
45	Ø 12	2	T520	133	52	0.32	1000	3 x Ø8
		3	T530	185		0.46		4 x Ø8
		4	T540	237		0.59		5 x Ø8
		5	T550	289		0.72		6 x Ø8
		6	T560	341		0.85		7 x Ø8
60	Ø 14	2	T620	160	65	0.77	2200	3 x Ø10
		3	T630	225		1.08		4 x Ø10
		4	T640	290		1.40		5 x Ø10
		5	T650	355		1.72		6 x Ø10
		6	T660	420		2.05		7 x Ø10

* Screws, washers and nuts included.

VERTICAL TULIP BLOCKS


These vertical blocks are fitted with Tulip sheaves that accept very different lead angles. This is a small and light solution that replaces traditional adjustable blocks. Mounting screws, nuts and washers included.



Mod. 817.050
VERTICAL

Mod. 818.050
OVER THE TOP

More vertical blocks can be joined to form a set.

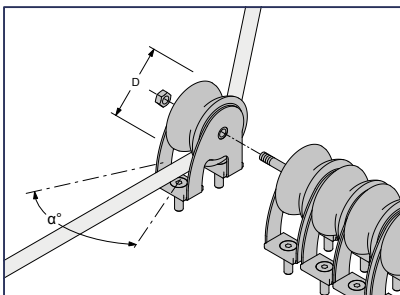

MODEL	D mm	Ø LINE mm	α°	SWL kg	WEIGHT kg	SCREWS N° x Ø mm
VERTICAL						
817.050	45*	12	40°	1000	0.16	2 x Ø6
817.060	60	14	40°	2200	0.39	3 x Ø8
OVER THE TOP						
818.050	45*	12	40°	1000	0.16	2 x Ø6
818.060	60	14	40°	2200	0.39	3 x Ø8

* The D=45 mm sheave is resin made with Delrin side ball bearings.


mainsail blocks

CLEW BLOCKS

Solution designed to solve the connection of a sheave to the furling mainsail clew efficiently. The block is contained within the size of the sail, thus allowing a larger surface of the mainsail to be used.

The choice of materials guarantees the least weight as well as a very good mechanical resistance to the environment. Particular care has been taken over the ease of connection which is obtained by normal "webbing". This ensures moreover a very good distribution of the load on the sail.

MATERIALS: Cheek plates are made of anodized aluminium. Also polished s. steel solutions are available on request.



MODEL	Ø LINE mm	D mm	L mm	B mm	SWL kg	WEIGHT kg
991.073	14	70	112	3 x 36	1000	0.23
991.093	16	90	145	3 x 46	2000	0.45
991.124	18	120	190	4 x 46	3000	1.04
991.154	20	150	225	4 x 52	4000	2.05
991.184	24	180	265	5 x 52	8000	2.65


REEF BLOCKS

The blocks are connected to the leech of the mainsail with webbing, and reduce point loading on the mainsail when reefing. The small diameter sheaves are suitable to very high loads.


The center hole can be used as a safety connection to the boom when reefed.

The small version (D=50 mm) is for boats to 50 ft, larger (D=120 mm) for boats to 100 ft.

If a larger sheave is required and if higher weight and larger sizes are acceptable, then the clew blocks described above can be considered.



Mod. 994.075



MODEL	Ø LINE mm	D mm	L mm	B mm	Z mm	SWL kg	WEIGHT kg
994.055	14	50	143	65	20	1500	0.22
994.065	16	60	178	79	20	3000	0.37
994.075	18	70	204	88	25	4500	0.70
994.085	20	80	238	112	35	5500	0.90
994.095	24	100	292	140	45	8000	1.30
994.125	28	120	357	170	60	10000	2.90

special blocks

2:1

THB
TWIN HALYARD BLOCKS




TWIN HALYARD BLOCKS

The "Twin-halyard block" is specially made for a 2 to 1 main halyard.

The very small sheave is aluminium made with a Composite Fibre bushing.


The body is completely made in "High-resistance" stainless steel **Nitronic 50**.

4 sizes for **breaking loads from 2600 to 10000 kg**, for boats up to 70 ft.




Self-locking pin

Captive pin



MODEL	Ø LINE mm	D mm	d mm	A mm	B mm	C mm	SWL kg	WEIGHT kg
H020	8 - 10	28	8	16	15.5	53.5	1300	0.08
H030	10 - 12	34	10	18	20.5	65.0	2200	0.15
H040	12 - 14	42	12	21	24.5	80.0	3500	0.28
H050	14 - 16	49	14	21	34.0	89.0	5000	0.54



HLB
HIGH LOAD BLOCKS



HIGH LOAD BLOCKS

These small and light blocks are the best solution for very high loads when sliding is not important.


The very small sheave is fitted with a Composite Fibre bushing.

The one piece frame is made for line connection.

The 3 blocks (D=30, 40 and 55 mm) give an 8 to 1 system.

This system is specially designed for the backstay or the boom-vang.

8:1



Set of blocks:
8:1 system

MODEL	Ø LINE mm	D mm	H mm.	SWL kg	WEIGHT kg
H130	6 - 8	30	59	600	0.05
H140	8 - 10	40	74	1200	0.08
H150	10 - 12	55	91	2400	0.18
H160	12 - 16	70	116	3500	0.33

dynablock

DYNABLOCK

The new Antal block with revolving resin cheekplates and with a Dyneema snap loop protected by a polyester cover.

A light and reliable solution that offers an easy, fast and safe connection.

Dynablock is also suitable for a lashing with a thin Dyneema line.


The resin sheave is on composite fibre bushing with two side ball bearings.

Spare snap-loops (DBS04 for size 44 and DBS05 for size 56) available.




MODEL	SHEAVE Ø mm	Ø LINE mm	SWL kg	WEIGHT gr
-------	----------------	--------------	-----------	--------------

DBS44	44	10	600	90
DBS56	56	12	1000	176



with Dyneema
snap loop

DBL44	44	10	600	80
DBL56	56	12	1000	140



for lashing
(line not included)

Open the block

1

Put the line in

2

Close the block






3

Close the loop

4

Lock the knob

5



snatch looper

SNATCH LOOPER

New Antal Snatch block with a small sheave suitable for high loads, particularly designed for 2:1 main halyards.

Hard black aluminium rotating cheek plates with a Dyneema Snap Loop protected by a polyester cover, aluminium sheave on fibre bearing.

Two sizes are available with and without a Snap Loop. The Dyneema Snap Loop, including the Dog Bone fitting, is also available separately.

MODEL	SHEAVE Ø mm	Ø LINE mm	SWL kg	WEIGHT gr
-------	----------------	--------------	-----------	--------------

WITH DYNEEMA SNAP LOOP

LS046	46	14	2200	230
LS054	54	16	3500	368

WITHOUT DYNEEMA SNAP LOOP

LL046	46	14	2200	170
LL054	54	16	3500	277



1

Open the block and put the line in

2

Close the block

3

Insert the Loop

4

Lock the Loop

snatch blocks

SNATCH BLOCKS D=40 and 60 mm

The cheekplate revolves around the sheave axle allowing the block to open; a safety ball stops the block from opening with an adjustable screw to set the ball on locked position.

There is a becket for the "hanging line".

MATERIAL: sheave with composite fibre main bearing and double side ball bearing. Hard anodized and teflon coated aluminium cheekplates with side rubber protections (yellow rubber on the revolving cheekplate).



Standard model can be attached with highly resistant spectra line.



Model /SH is supplied with a shackle.



Model /SN is supplied with a snap-shackle (HR).



MODEL	D mm	Ø LINE mm	SWL kg	WEIGHT kg
9040	40	12	700	0.11
9060	60	14	1300	0.26




SNAP LOOPS

It is a simple and original line loop with a snap that offers an easy fastening and avoids accidental opening.

Mod. SL4S -- Loop for 9040 block (pg. 176)

Mod. SL5S -- Loop for 9060 block (pg. 176)

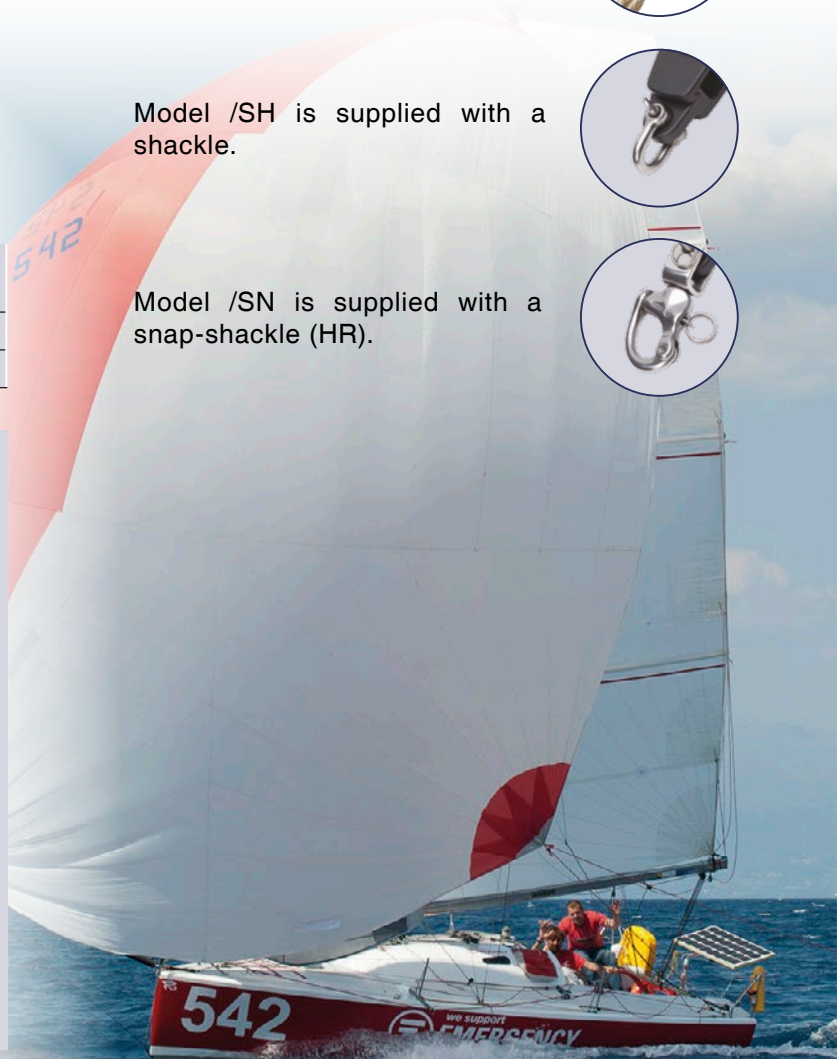

barber block

BARBER BLOCK

The new Antal Barber Block is a snatch block with a “ring” head, it provides an immediate entry of the sheet (the cheekplate revolves around the sheave axle allowing the block to open) and an easy 2:1 control (a line through the ring allows the control of the block height).

A safety ball prevents the revolving from accidental opening and an adjustable screw can set the ball in fully locked position.

A small becket to attach a line for hanging the block is present.

Rubber covers to protect the deck from bumps.

Aluminium sheave with composite fibre bushing and two side ball bearings.

MODEL	D mm	Ø LINE mm	SWL kg	WEIGHT gr
BB4012	40	12	1300	160
BB6014	60	14	2000	360



TWIN SHEAVE BLOCK

Twin sheave at 90° to link two perpendicular lines.

Aluminium sheave on “Composite Fibre” bushing and hard black anodized one piece body.

Mod. TB4212

TWIN SHEAVE BLOCK
 Sheaves = Ø42 mm
 Max line = Ø12 mm
 Weight = 250 gr
 SWL = 2000 kg



maxi snatch blocks

SNATCH BLOCKS D=90 and 120 mm

The cheekplate revolves around the sheave axle allowing the block to open; a safety pin, which engages automatically on closing, stops the block from opening accidentally.

Materials: high-strength resin sheaves, hard anodized alloy cheekplates, high-strength stainless steel (17-4-PH) structural pins.



Mod. 908.095



Mod. 908.125

MODEL	D mm	Ø LINE mm	SWL kg	WEIGHT kg
908.095	90	16	2500	0.41
908.125	120	20	4500	1.12



The block can be attached with webbing or better still with a fine highly resistant line made of material such as Kevlar or Spectra.

Model /SN is supplied with a HR Wichard snap shackle.



Model /SH is supplied with a shackle.



SNATCH BLOCK ON PAD-EYE D = 90, 120 AND 150 mm

Three snatch blocks 90, 120 and 150 mm diameter, on pad-eye and stand-up spring are available. The cheekplate revolves to open the block, a safety pin stops the block from opening. Above blocks are available also on screwed pad-eye.



Block on
"4 screws" pad-eye

MODEL	SHEAVE		Ø LINE mm	SWL kg	WEIGHT kg	EYEBOLT mod.
	D mm	WIDTH mm				

"4 SCREWS" PAD-EYES

918.095	90	26	18	2500	0.82	7210
918.125	120	36	20	4500	2.05	7214
918.155	150	46	28	6500	4.20	7216

SCREWED PAD-EYES

928.095	90	26	18	2500	1.14	7310
928.125	120	36	20	4500	2.70	7314
928.155	150	46	28	6500	5.30	7316

blocks & soft links


BLOCKS & T-LOCK

Blocks designed to be linked with Dyneema loops as **Looper Blocks** (see page 72) can be tied to a special Antal **swivelling toggle** and then fitted into the new Antal **T-Lock base** (see page 169).

The result is a **removable deck block** that rotates in any direction of the load.



Swivelling toggle



Looper block & toggle



T-Lock base



Swivelling & removable deck block

Looper + Dyneema pad-eye



Snatch Looper + Dyneema pad-eye



BLOCKS & DYNEEMA PAD-EYE

Blocks provided with a Dyneema snap-loop as Looper Blocks (page 72) or Snatch Looper (page 93) may be connected to the proper Dyneema pad-eye (page 168).

An easy and safe way to tie the block down is with multiple wraps of thin Dyneema line (e.g. size 3 mm) then splice the two ends and wrap everything with a thin wire (e.g. size 1 mm).

Consider that 8 wraps of well spliced 3 mm Dyneema without cover reach a breaking load higher than 6 tons.

The link in the picture is obtained with 2.60 m of 3 mm Dyneema line and a block size 80 mm (mod. LL1080).



8 wraps



1st spliced end



2nd spliced end



Wrapping



“T” track sliders

genoa cars..... 100



spi-pole sliders..... 107




halyard sliders 109




outhaul sliders 110



classic s.steel 112

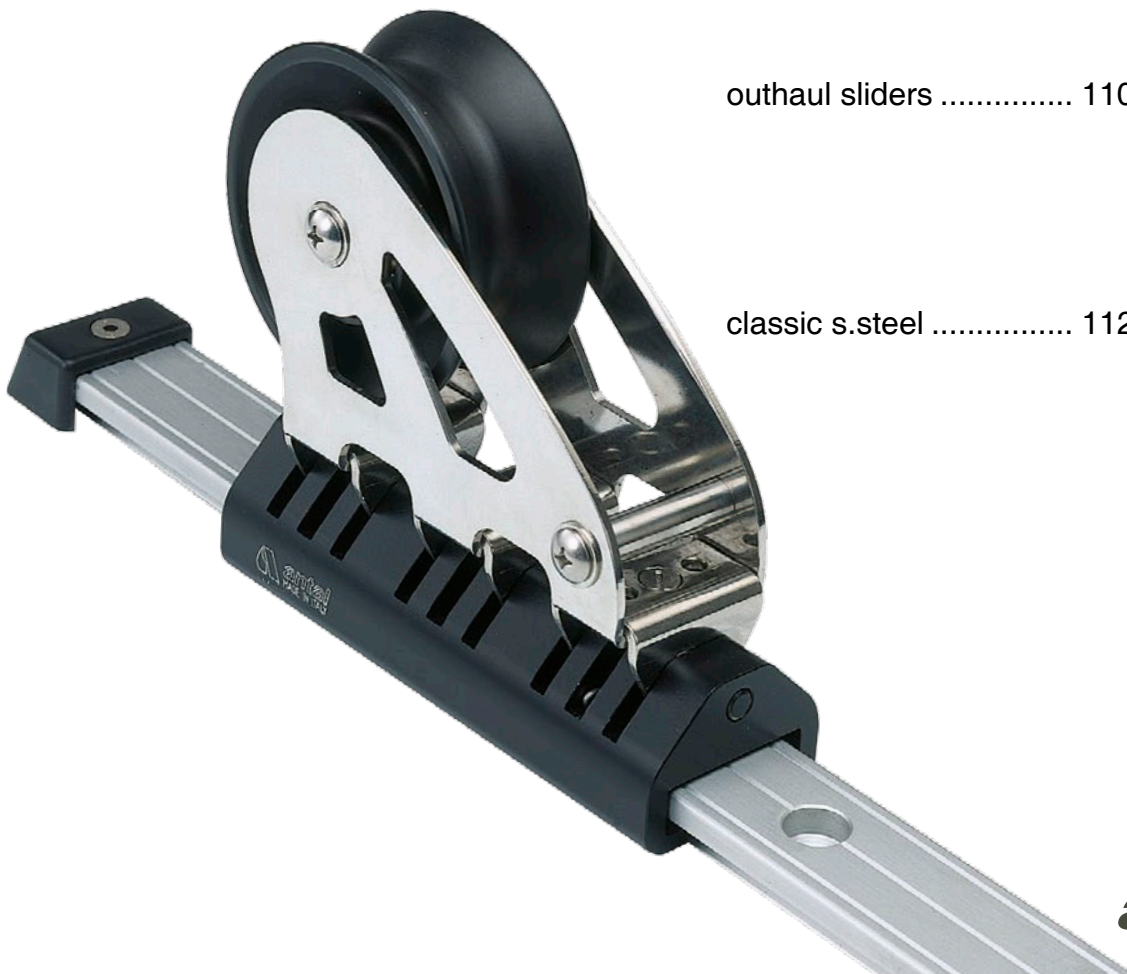

26x4 genoa cars



Mod. 602.211 "T" TRACK 26x4

High resistance silver anodized light alloy extrusion.
Max length = 3 m Weight = 0.5 kg/m
Fasteners = 5 mm screws Hole spacing = 50 mm

Mod. 691.141 SIMPLE END FITTING

Plastic made, fastened with one 5 mm screw.

Mod. 690.151 END FITTING WITH ONE SHEAVE

Mod. 690.152 END FITTING WITH TWO SHEAVES

A forward end fitting with one or two sheaves for the slider control is available.


Hard black anodized aluminium base and resin sheave with side ball bearings.

Fasteners = 2 x Ø6 mm screws



Mod. 621.492

For boats up to 33 ft

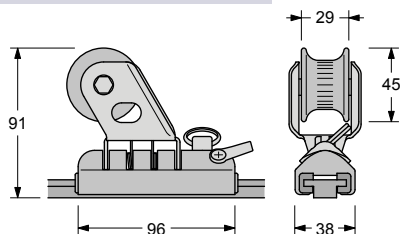

Mod. 621.492 GENOA CAR 26x4


Hard black anodized with A316 stop pin and nylon sliding inserts.

The sheave structure, made in AISI 316 s. steel, turns left and right ($\pm 50^\circ$).

Resin sheave with 2 side ball bearings, wide section for two sheets.

Weight = 0.35 kg SWL = 800 kg Stop pin Ø = 8 mm

For boats up to 30 ft

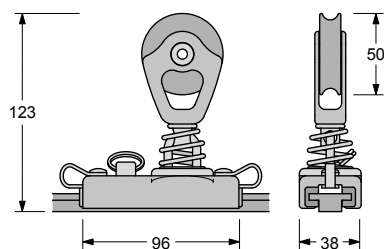


Mod. 621.452 GENOA CAR 26x4

A 50 mm block with spring is fitted on the aluminium slider. Also this model is supplied with the stop pin.

Weight = 0.25 kg SWL = 500 kg

Stop pin Ø = 8 mm


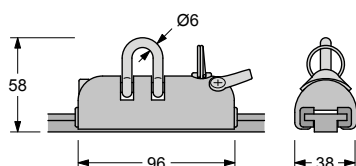


Mod. 621.462 SIMPLE SLIDER

A 6 mm shackle is fitted on the hard black anodized slider. AISI 316 s. steel stop pin and nylon sliding inserts.

Weight = 0.21 kg SWL = 800 kg

Stop pin Ø = 8 mm




CAR CONTROL


To regulate the car position, tackles with 2:1 and 3:1 purchase can be produced. A special end fitting with 1 or 2 sheaves can be mounted on the track with one block connected to the car.

For the car control, mini blocks have been used (see page 50). Mini Blocks have a 34 mm sheave and are suitable for a 6 mm line.

CAR CONTROL 2:1

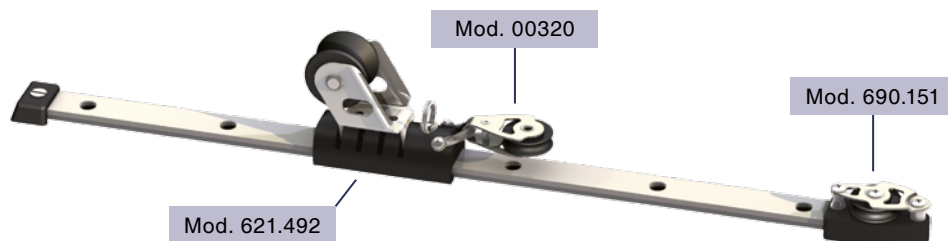

CAR CONTROL 3:1

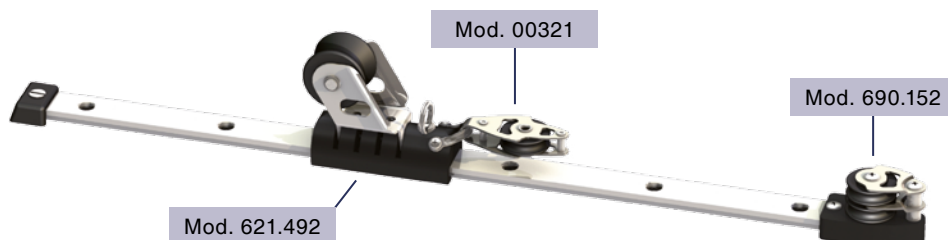

RACE GENOA CAR


On an aluminium car a sheet block (Dynablock, see p. 92) is tied with a Dyneema line, weight 0.26 kg, **SWL=600 kg**.

There is a block with becket on the car and an end-fitting with a double block for a 3:1 car control. No stop pin for this solution.

CAR CONTROL 3:1



32x6 genoa cars



Mod. 602.112 "T" TRACK 32x6 with 100 mm holes-spacing

Mod. 602.212 "T" TRACK 32x6 with 50 mm holes-spacing

High resistance silver anodized light alloy extrusion. Rounded upper edges, larger base with a seat for the silicone. Hard black anodization is also available on request (add /B to the model number).

Hole spacing: 100 mm or, for a more accurate positioning, 50 mm. Fasteners: 6 mm screws Weight: 0.8 kg/m
Max length: 6 m



Mod. 691.241 **END FITTING**, made in plastic, or:

mod. 691.241/AL - silver anodized alu

mod. 691.241/B - black anodized alu


mod. 691.241/S - AISI 316 s. steel

For boats up to 44 ft

Mod. 622.492 **GENOA CAR 32x6**

Hard black anodized aluminium slider with low-friction nylon sliding inserts. The revolving upper structure ($\pm 50^\circ$) is made of AISI 316 s. steel. The resin sheave is fitted with 2 side ball bearing, wide section for double sheet. AISI 316 s. steel pin with a lock-up position. Bracket for remote control line.

Weight = 0.86 kg **SWL = 2800 kg** Stop pin $\varnothing = 11$ mm

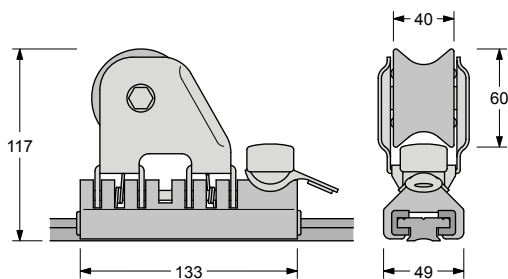

For boats up to 38 ft


Mod. 620.492 **GENOA CAR 32x6**


For 32x6 "T" track, as the above model, but with smaller sizes.

Weight = 0.40 kg

SWL = 800 kg

Stop pin $\varnothing = 11$ mm

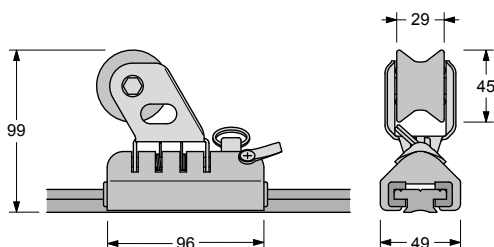

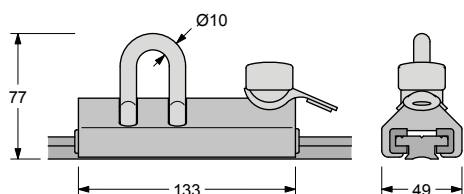

Mod. 622.462 **SIMPLE SLIDER**

A 10 mm shackle is fitted on the aluminium slider. Also this model is supplied with the stop pin.

Weight = 0.45 kg **SWL = 2200 kg**


Stop pin Ø = 11 mm




CAR CONTROL

To regulate the car position, tackles with 2:1 and 3:1 purchase can be produced. A special end fitting with 1 or 2 sheaves can be mounted on the track and one block connected to the car.

CAR CONTROL 2:1

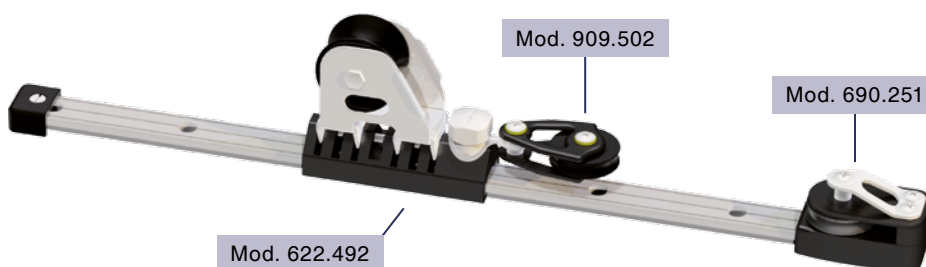

CAR CONTROL 3:1

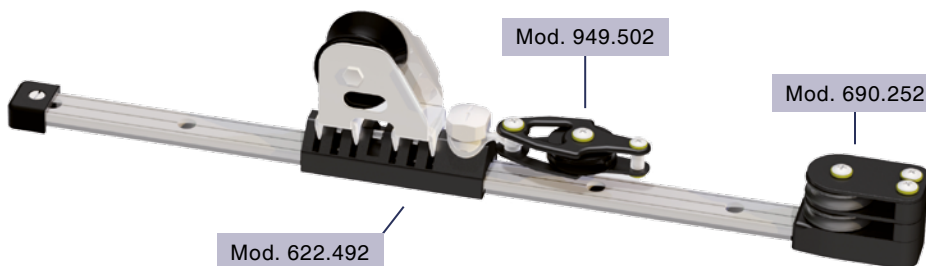


Mod. 909.502 50 mm block connected to the car.

Mod. 949.502 50 mm block with becket connected to the car.

Mod. 690.251 Black aluminium end fitting with one 50 mm sheave.

Mod. 690.252 Black aluminium end fitting with two 50 mm sheave.

For boats up to 52 ft

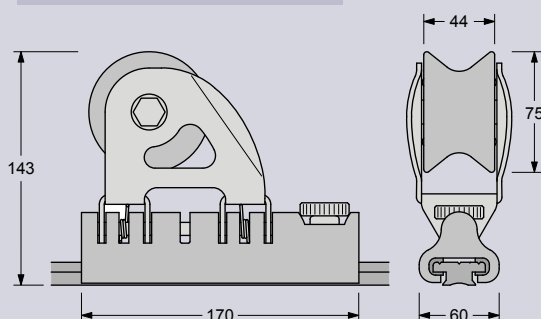


Mod. 625.492 **GENOA CAR 32x6 PLUS**


The "plus" genoa car runs on HS fibre sliding inserts on 32x6 "T" track.

It is fitted with a "screwed" stop pin done for 11 mm holes (smaller diameter are available on request).

Weight = 1.95 kg **SWL = 3800 kg**



40x8 genoa cars

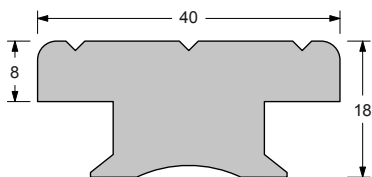

Mod. 602.113 "T" TRACK 40x8 with 100 mm holes-spacing

Mod. 602.213 "T" TRACK 40x8 with 50 mm holes-spacing

High resistance silver anodized light alloy extrusion. Rounded upper edges, larger base with a seat for the silicone. Hard black anodization is also available on request (add /B to the mod. number).

Hole spacing: 100 mm or, for a more accurate positioning, 50 mm.

Fasteners: 8 mm screws Weight: 1.3 kg/m

Max length: 6 m




Mod. 691.341 **END FITTING**, made in plastic, or:

mod. 691.341/AL - silver anodized alu

mod. 691.341/B - black anodized alu

mod. 691.341/S - AISI 316 s. steel

For boats up to 52 ft

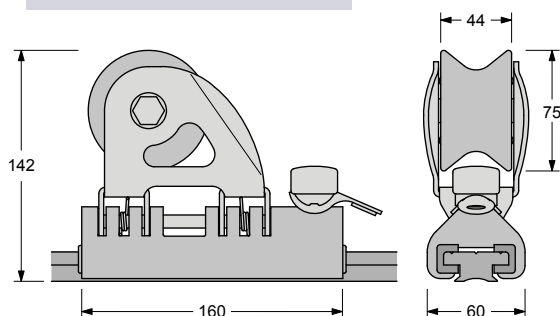


Mod. 623.492 **GENOA CAR 40x8**

Hard black anodized aluminium slider with low-friction nylon sliding inserts. The revolving upper structure ($\pm 50^\circ$) is made of AISI 316 s. steel. The aluminium sheave is fitted with one main Composite Fibre bearing and 2 side ball bearing, wide section for double sheet. AISI 316 s. steel pin with a lock-up position. Becket for remote control line.

Weight = 1.50 kg **SWL = 3800 kg** Stop pin $\varnothing = 14$ mm

For boats up to 60 ft

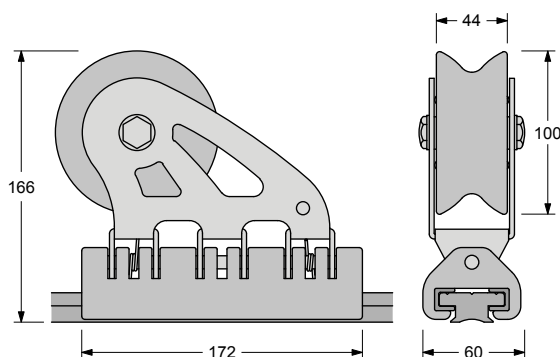

Mod. 624.492 **GENOA CAR 40x8 MAXI**


The maxi slider, for boats up to 60 ft, runs on HS fibre sliding inserts on 40x8 "T" track (mod. 602.213).

Weight = 1.94 kg **SWL = 4800 kg**

Mod. 691.722/AL **DOUBLE STOP PIN**

For the double stop pin with alu slider the 50 mm hole spacing track (mod. 602.213) is necessary. Stop pin $\varnothing = 14$ mm



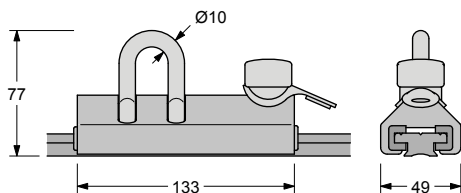

Mod. 623.462

SIMPLE SLIDER

A 12 mm shackle is fitted on the aluminium slider. Also this model is supplied with the stop pin.

Weight = 0.79 kg **SWL = 3300 kg**


Stop pin Ø = 14 mm




CAR CONTROL

To regulate the car position, tackles with 2:1 and 3:1 purchase can be produced. A special end fitting with 1 or 2 sheaves can be mounted on the track and one block connected to the car.


CAR CONTROL 2:1

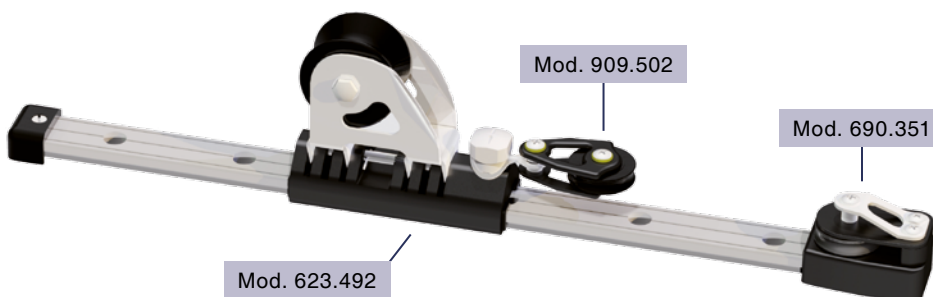

CAR CONTROL 3:1

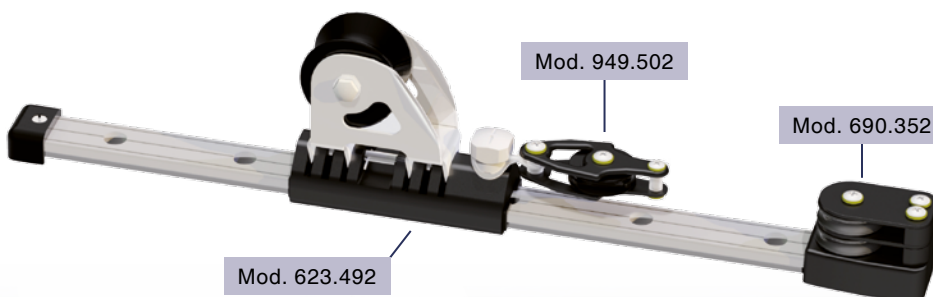

- Mod. 909.502 50 mm block connected to the car.
- Mod. 949.502 50 mm block with becket connected to the car.
- Mod. 690.351 Black aluminium end fitting with one 50 mm sheave.
- Mod. 690.352 Black aluminium end fitting with two 50 mm sheave.

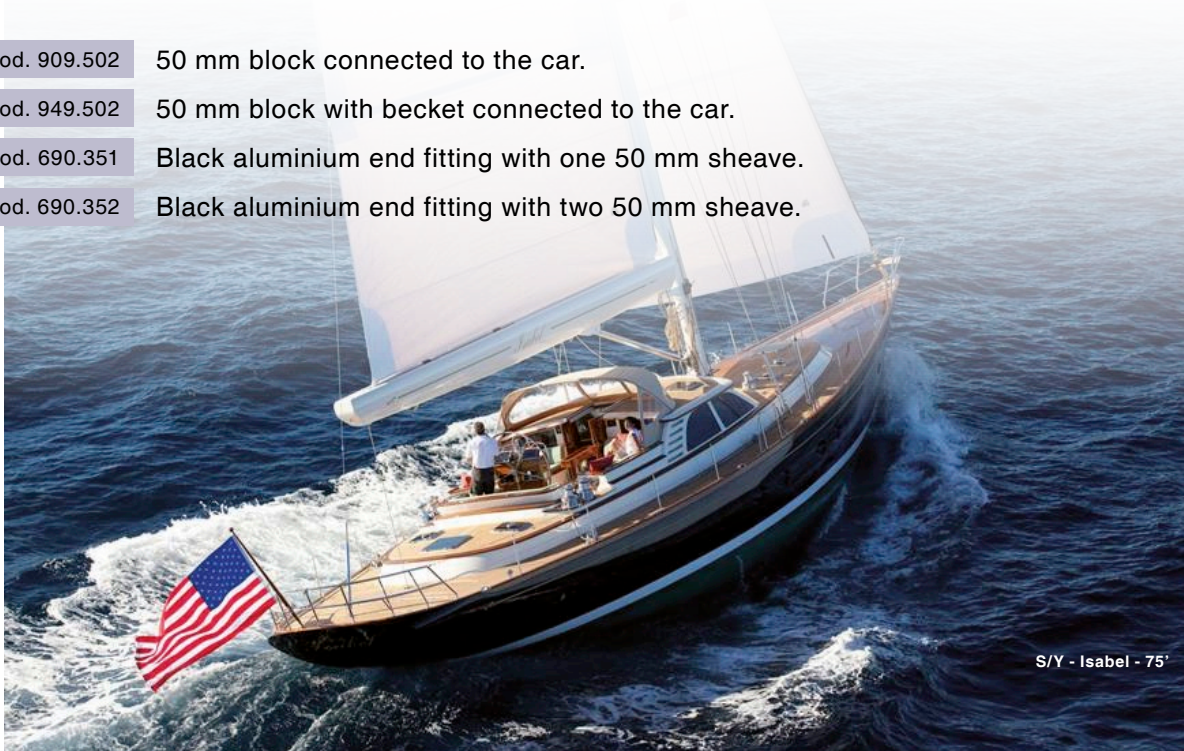

S/Y - Isabel - 75'

double 40x8 genoa cars

DOUBLE 40x8 GENOA CARS SHEAVES 120, 150, 180 mm


The double 40x8 genoa cars are made for maxi yachts (larger than 60 ft), they run on 40x8 T-track (see page 104).

Two hard black anodized aluminium sliders (add **/AL** after the model number) or two polished s.steel sliders (add **/S** after the model number) running on nylon guides are connected with a revolving ($\pm 50^\circ$) link structure.

The sheave, with a wide sections for a double sheet, is fitted with a main Composite Fibre bearing and two side self-captive ball bearings.




Sunreef 60 - photo Sunreef Yachts



Mod. 623.180/AL

Mod. 623.150/AL

Mod. 623.120/AL

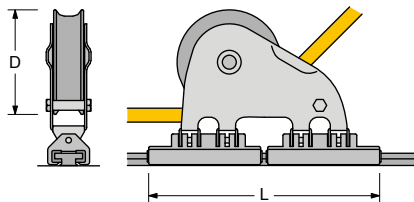

MODEL	D mm	L mm	SWL kg	WEIGHT kg
623.120/AL	120	330	5000	3.10
623.150/AL	150	330	6500	4.25
623.180/AL	180	375	9000	6.20

All the above double cars are available with stainless steel sliders.

The double stop pin and the T-track are also available in s.steel.

Substitute **/S** for **/AL** in the model number.

STOP PIN

A special double stop pin ($\varnothing 14$ mm) is available to lock the car in position on the track:

Mod. 691.722/AL

mod. 691.722/AL - hard black anodized alu
mod. 691.722/S - polished s.steel

With the double stop pin the 50 mm hole spacing track (mod. 602.213) is necessary.


Mod. 623.180/S

Mod. 691.722/S

spi-pole sliders

SPI-POLE SLIDERS

This “long version” of Spi-Pole sliders is designed to reduce the side loads and torsion on the track. They slides on fibre inserts to reduce the friction to a minimum. Made for standard 32x6 and 40x8 T tracks, they are always fitted with one upper and one lower block with becket for the control line. Single and double sheave end fitting for 2:1 and 3:1 systems are available. Antal offer a hard black anodized and teflon coated “T” track that gives a lower friction coefficient.

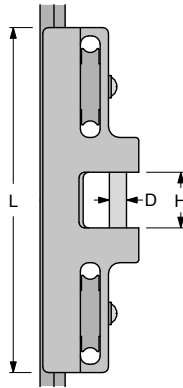


SLIDER

MODEL	L mm	H mm	D mm	WEIGHT kg	TRACK mm
671.002	214	40	12	0.75	32x6
671.003	248	40	12	1.10	40x8
671.004	310	32	16	1.60	40x8 Maxi




Line driver for Spi-Pole slider control is on page 27




TRACK

MODEL	A x B mm	SCREWS mm	HOLE-SPACING mm	WEIGHT kg/m
602.212/B	32 x 6	Ø6	50	0.80
602.213/B	40 x 8	Ø8	50	1.30




END FITTING WITH 1 SHEAVE AND BECKET

MODEL	D mm	WEIGHT kg	TRACK mm
690.251	50	0.38	32x6
690.351	50	0.47	40x8
691.451	75	0.60	40x8 Maxi



END FITTING WITH 2 SHEAVES

MODEL	D mm	WEIGHT kg	TRACK mm
690.252	50	0.43	32x6
690.352	50	0.52	40x8
691.452	75	0.75	40x8 Maxi

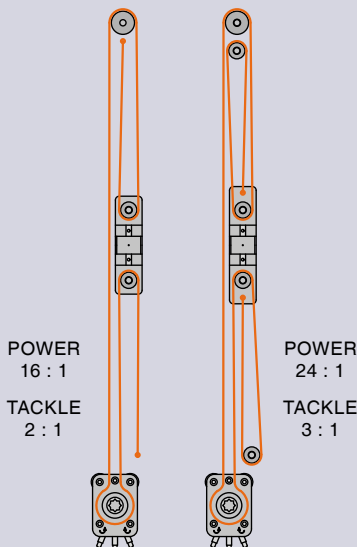

'T' tracks

'T' TRACKS

Antal produces three sizes of 'T' tracks: 26x4, 32x6 and 40x8.

'T' tracks are available in the three versions silver aluminium, hard black anodized aluminium and s.steel, all with 50 and 100 mm hole spacing.

SIZE	HOLE SPACING mm	SILVER	BLACK	S.STEEL
------	--------------------	--------	-------	---------

STANDARD TRACK




26 X 4	50	602.211	602.211/B	- - -
32 x 6	50	602.212	602.212/B	602.212/S
	100	602.112	602.112/B	602.112/S
40 x 8	50	602.213	602.213/B	602.213/S
	100	602.113	602.113/B	602.113/S

AUTOMATIC TRACK

32 x 6	50	602.312/SI	602.312	- - -
40 x 8	50	602.313/SI	602.313	- - -

On request, track will be machined with "rounded ends" and then anodized.

Moreover, 32x6 and 40x8 sizes are also made with holes for automatic locking of the slider, in both the silver and hard black anodized versions.

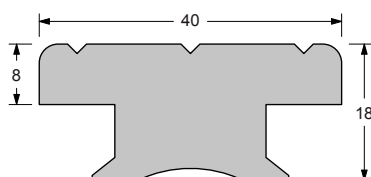

real size



automatic track



silver anodizing



hard black anodizing



s.steel with
rounded head



halyard system

HALYARD SLIDER

The “halyard slider” has been specifically planned for wire halyards and for those halyards which are subject to such high strain as to preclude use of a stopper. This solution permits easy adjustment and secure locking of halyards.



AUTOMATIC TRACK


The special shape of the holes allows the car moving with the stop pin on and the automatic car lock in the new position.

THE COMPLETE SYSTEM INCLUDES:

- Hard black aluminium ‘T’ track automatic version, with fixed length and with numbered positions of the slider, positioning holes spacing = 50 mm, fixing screws spacing = 100 mm.
- The halyard slider with the 2-positions stop-pin: locked and automatic insertion.
- 2 simple aluminium end fittings for ‘T’ track.

Also automatic tracks of any length, up to 6 m, are available. In this case, the positioning holes are not numbered (32x6 mod. 602.312, 40x8 mod. 602.313).

ADJUSTING AND BLOCKING THE HALYARD

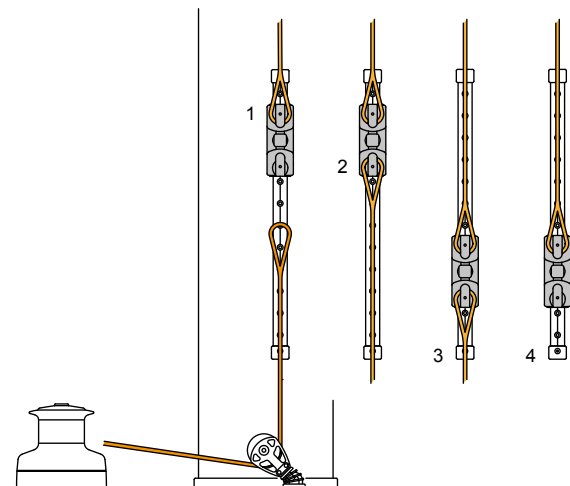

1. hook the halyard to the slider
2. connect the winch
3. put the halyard under tension and lock it in place
4. free the slider from the winch

COMPLETE SYSTEM		TRACK			SLIDER			END FITTING
MODEL	SWL kg	MODEL	SIZE mm	L mm	MODEL	A mm	B mm	MODEL
622.422	2800	602.412	32X6	990	622.402	50	135	691.241/B
623.422	3800	602.413	40X8	1130	623.402	60	160	691.341/B
624.422	5800	602.413	40X8	1130	624.402	60	210*	691.341/B

* Car with double Stop-pin


outhaul sliders

OUTHAUL SLIDER

This slider runs on self-lubricating *HS* fibre enabling it to deal with heavy work loads while remaining compact; it also provides low friction running and easy manoeuvring.

The sail connection, which is made of s.steel and revolves, reduces the height of the sail above the boom to a minimum.

Standard "T" tracks, sizes 32x6 and 40x8, are used, with black anodized finish and 50 mm hole spacing.

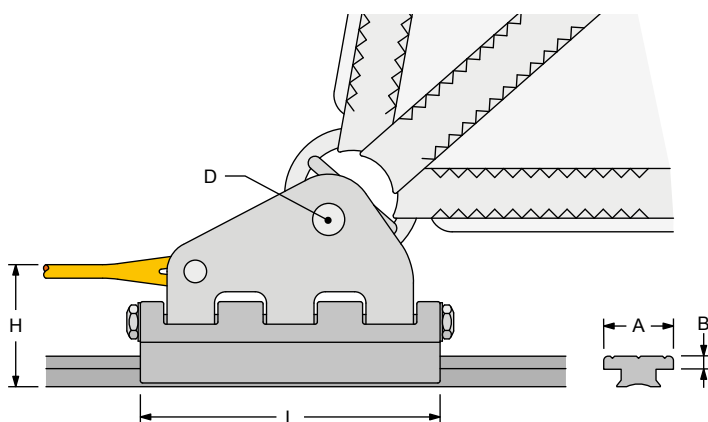

CAR

MODEL	L mm	H mm	D mm	WEIGHT kg	SWL kg
672.002	130	60	12	0.50	3000
672.003	160	80	16	1.23	6000
672.004	200	80	16	1.68	8000
672.005	280	90	20	3.55	10000

with **32x6** T-track:

For boats up to 48 ft

with **40x8** T-track:

For boats up to 70 ft



The car runs on self-lubricating *HS* fibre and with hard black anodized track.

TRACK

MODEL	A x B mm	SCREWS Ø mm	SPACING mm	WEIGHT kg/m
602.212/B	32 x 6	6	50	0.80
602.213/B	40 x 8	8	50	1.30



outhaul cars - furling main




OUTHAUL CAR WITH SHEAVE

A ball bearing car is necessary for the outhaul of a furling main sail. Two sizes: 190 mm car with a 60 mm sheave and 260 mm car with a 90 mm sheave, both on Antal 4Race 21x31 tracks. A special clew-block completes the system.

CAR						CLEW BLOCK	
	MODEL	L mm	SHEAVE Ø mm	SWL kg	WEIGHT kg	MODEL	SHEAVE Ø mm
For boats up to 48 ft	4190/H	190	60	1900	1.10	991.093	90
For boats up to 56 ft	4260/H	260	90	2800	1.65	991.124	120

OUTHAUL CAR - DIRECT CONNECTION

This simple solution reduces the load on the car but increases the tension of the line. Three sizes with cars 110, 150 and 190 mm long, on Antal 4Race 21x31 tracks. In this case too a special clew block completes the system.

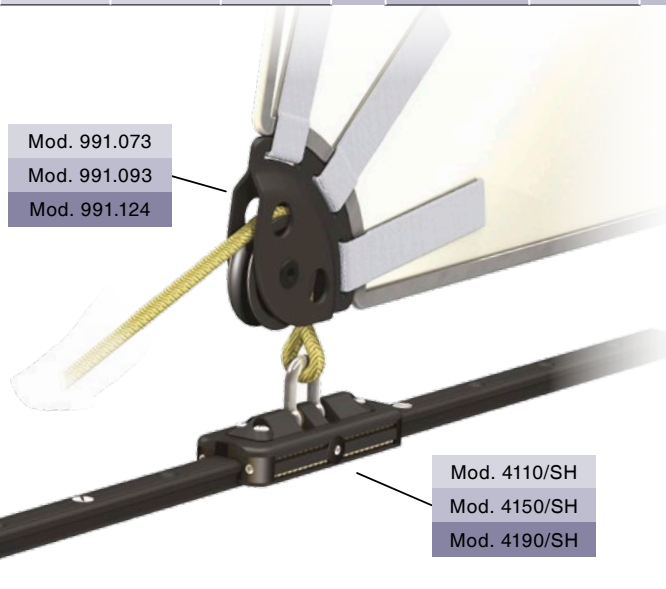

CAR					CLEW BLOCK	
	MODEL	L mm	SWL Kg	WEIGHT kg	MODEL	SHEAVE Ø mm
For boats up to 40 ft	4110/SH	110	1000	0.50	991.073	75
For boats up to 48 ft	4150/SH	150	1400	1.10	991.093	90
For boats up to 56 ft	4190/SH	190	1900	1.65	991.124	120

TRACK - ALL SOLUTIONS

All the solution described use Antal 4Race tracks 21x31



MODEL	SIZE	WEIGHT kg/m	SCREWS Ø mm	SPACING mm	ENDS MODEL
4510	21x31	0.77	8	100	4271

For further information on cars and tracks see p. 116. For further information on clew blocks see p 90.

Classic s.steel for genoa


32x6 genoa car - L = 132 mm - Sheave Ø = 60 mm - SWL = 2800 kg


40x8 genoa car - L = 160 mm - Sheave Ø = 75 mm - SWL = 3800 kg

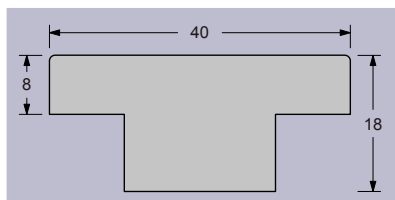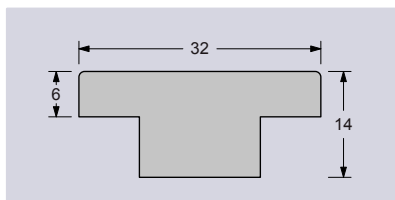


Antal offers a complete series of cars for genoa and mainsail with tracks and accessories completely made in **316 polished s.steel**. Particularly designed for classic boats.

Two sizes: with 32x6 and 40x8 s.steel T-tracks. 50 mm sheaves for all cars control.


Models on  are for T-track size 32x6

Models on  are for T-track size 40x8


CAR CONTROL 1:1

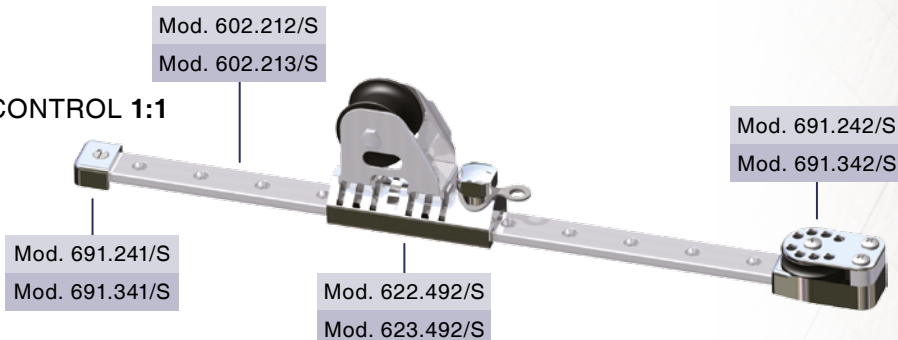

CAR CONTROL 2:1

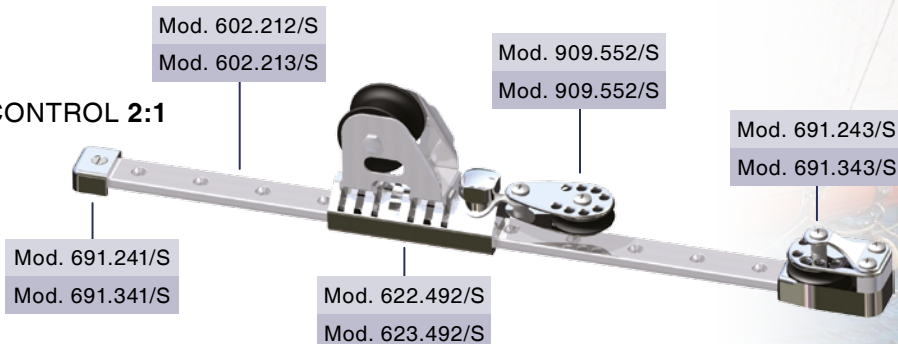


CAR CONTROL 3:1

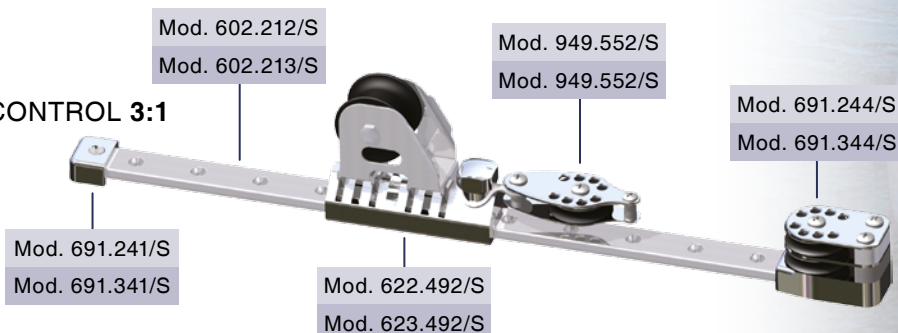





Classic s.steel for main sail

32x6 car with one block size 75 mm - L = 132 mm - SWL = 1500 kg
32x6 car with two blocks size 75 mm - L = 180 mm - SWL = 2000 kg

40x8 car with one block size 90 mm - L = 160 mm - SWL = 2500 kg
40x8 car with two blocks size 90 mm - L = 200 mm - SWL = 3500 kg



50 mm sheaves for all cars control.
 For classic Blocks, see page 76.

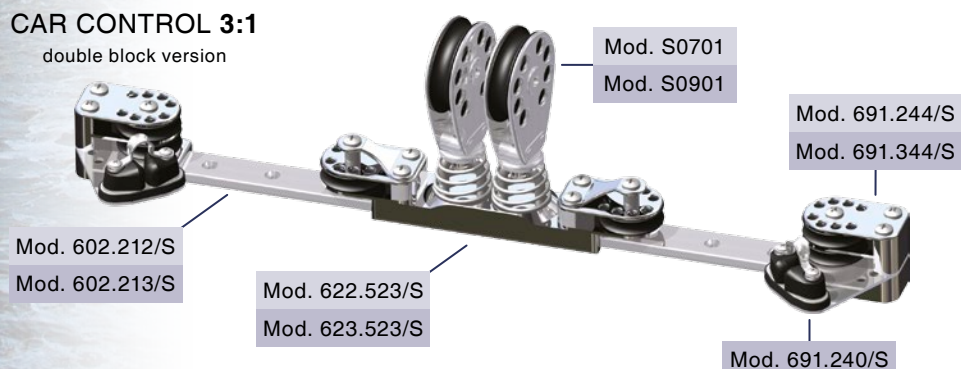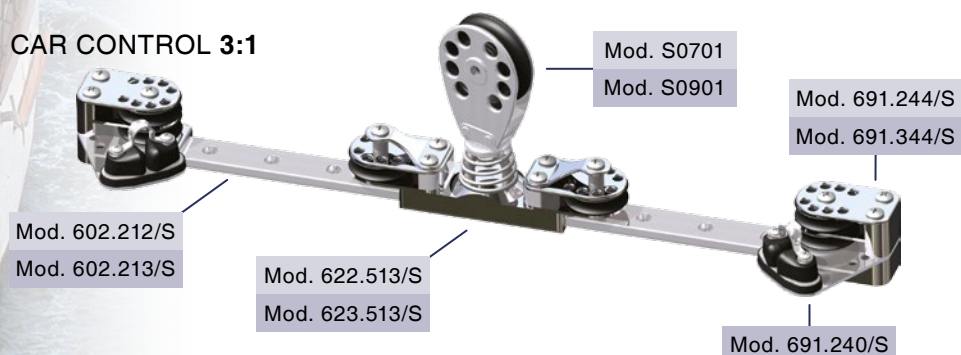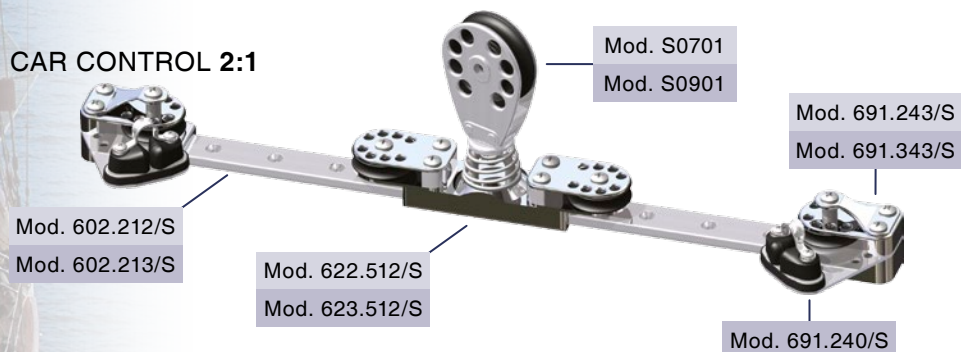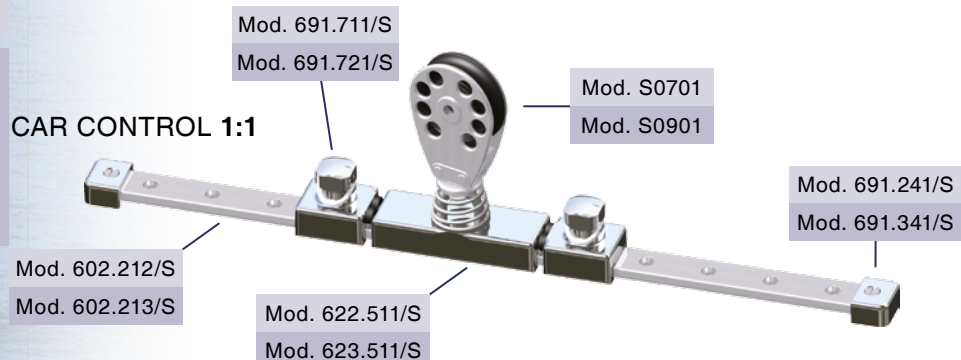



ball bearing cars



size 100117



size 110 - 150 - 190120



Dyneema links128



size 230 - 330 - 430132









ball bearing cars



4RACE SYSTEM

- Higher efficiency and smoother running.
- Better load resistance to vertical (V), horizontal (H) and torsional (M) loads.
- Higher safety margin as the car will remain on the track even after ball bearing failure (overload).
- Travellers are fitted with 2 Torlon ball circuits (lower) and 2 Delrin ball circuits (upper).

- Single double and triple control sheaves, with or without becket, can be fitted on the car.
- One-piece extruded body.
- The traveller, the track and all components are extruded in high strength alloy and hard black anodized. (Steel parts: AISI 316)
- Side windows for easy maintenance and ball bearing cleaning and/or replacement. Standard shackle or special "stand-up" joint.

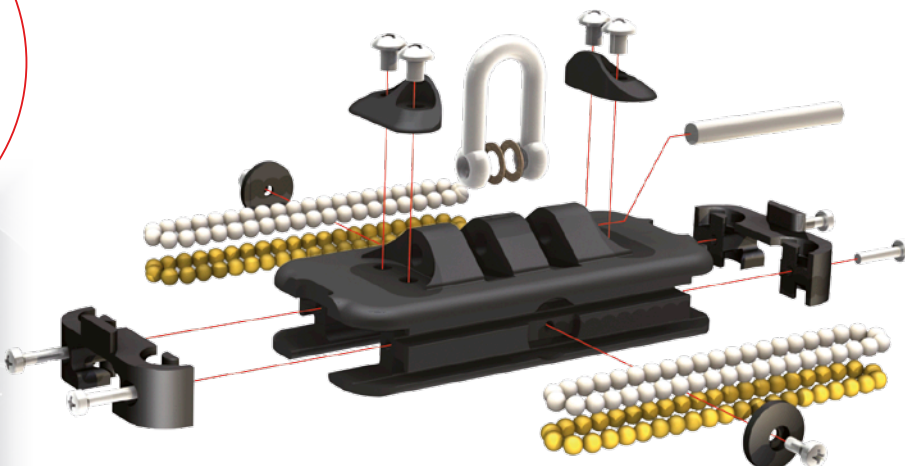
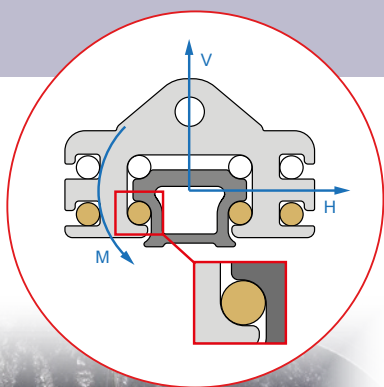


CAR SIZE	FOR BOATS UP TO	PAGE
100 mm	33 ft	117
110 mm	36 ft	120
150 mm	42 ft	
190 mm	48 ft	
230 mm	60 ft	132
330 mm	70 ft	
430 mm	80 ft	
330 mm	70 ft	136
430 mm	80 ft	


Open 40' - Vaquita



Mod. 4102/SH **TRAVELLER SIZE 100**
Weight = 0.23 kg SWL = 820 kg




Mod. 601.121 **STANDARD TRACK**
Tubular hard black anodized aluminium extrusion.
Fasteners = 6 mm screws / 100 mm hole spacing
Weight = 0.69 kg/m Max length = 6 m




Mod. 601.221 **STOP PIN TRACK**
As the above model but with holes (50 mm spacing) for the stop pin.




Mod. 691.421 **STOP PIN**
Aluminium slider on nylon inserts and AISI 316 s.steel pin. The stop pin needs to be fitted on the mod. 601.221 track.




Mod. 4261 **SIMPLE END FITTING**
Plastic made, mounted with a 6 mm screw.




Mod. 4262 **END FITTING WITH ONE SHEAVE**
High strength resin made with one Ø=35 mm sheave fitted with two side ball bearings.
Completed with a shock proof rubber.
Weight = 0.08 kg
Screws = 3 x Ø5 mm



Mod. 4263 **END FITTING WITH ONE SHEAVE AND BECKET**
High strength resin made with one Ø=35 mm sheave fitted with two side ball bearings and becket.
Completed with a shock proof rubber.
Weight = 0.10 kg
Screws = 3 x Ø5 mm



Mod. 4264 **END FITTING WITH 2 SHEAVE**
High strength resin made with two Ø35 mm sheaves fitted with two side ball bearings.
Completed with a shock proof rubber.
Weight = 0.10 kg
Screws = 3 x Ø5 mm



Mod. 4266 **END FITTING CAM-CLEAT**
This cam-cleat revolving in 3 different positions can be fitted on the end fitting with one or two sheaves.

main travellers size 100



MAIN BALL BEARING TRAVELLER SIZE 100


This traveller is 98 mm long and 62 mm wide.
The weight is 0.23 kg and the **working load = 820 kg**.
The sheaves for the car control are D=35 mm.
The complete systems includes 1.5 m long track.
The sheet block (OPF 60, page 58) is not included.

The traveller is fitted with a special “standup” connection for Antal block size 60 mm and includes the “stand-up” rubber. The same traveller is also available with a 6 mm shackle (for this case add /SH to the model number).



Mod. 4100

For boats up to 33 ft



COMPLETE SYSTEM

Mod. 4901

Mod. 4261

Mod. 691.421

COMPLETE SYSTEM

Mod. 4902

Mod. 4262

Mod. 4100

CAR CONTROL 1:1

COMPLETE SYSTEM

Mod. 4903

Mod. 4263

Mod. 4101

Mod. 4266

CAR CONTROL 2:1

COMPLETE SYSTEM

Mod. 4904

Mod. 4264

Mod. 4102

Mod. 4266

CAR CONTROL 3:1

Mod. 4103

Mod. 4266



genoa cars size 100 / 130

BALL BEARING GENOA TRAVELLER SIZE 100

This traveller is 98 mm long and 62 mm wide.
The weight is 0.40 kg and the **working load = 820 kg**.
Can be fitted with a front sheave with becket for a 3:1 control.

Main sheave (diameter 45 mm) with 2 side ball bearings and a wide section suitable for 2 sheet.
The sheaves for the car control are D=35 mm.

For boats up to 33 ft



Mod. 4261



Mod. 4601

Mod. 4603

Mod. 4264

BALL BEARING GENOA TRAVELLER SIZE 130

This traveller is 130 mm long and 62 mm wide.
The weight is 0.50 kg and the **working load = 1100 kg**.
Can be fitted with a front sheave with becket for a 3:1 control.

Main sheave (diameter 48 mm) with 2 side ball bearings and a wide section suitable for 2 sheet.
The sheaves for the car control are D=35 mm.

For boats up to 38 ft



Mod. 4633

Mod. 4261



Mod. 4631

Mod. 4633

Mod. 4264/Z



sizes 110/150/190


Mod. 4510

Standard track 31x21:

- fastening screws from the top
- 8 mm screws
- 100 mm hole spacing
- weight 0.77 kg/m

TRACK

Low profile track suitable for both mainsheet and genoa systems.



Mod. 4520

Standard track with stop pin holes:

- fastening from the top
- 8 mm screws
- 100 mm hole spacing
- stop pin holes 50 mm spacing
- weight 0.75 kg/m

Mod. 4530

Race track 31x21: with lightening holes

- fastening screws from the bottom
- 8 mm screws, 100 mm hole spacing
- weight 0.64 kg/m

Mod. 4540

Adjustable fastener track 31x21:

- bolts can be fixed in any position, for pre-existing holes
- 8 mm screws on sliding slugs
- weight 0.72 kg/m

Mod. 4541

Mod. 4551


Special end fitting for 48x60 track

Mod. 4541

Mod. 4550

Adjustable fastener track 48x60:

- bolts can be fixed in any position, for pre-existing holes
- 8 mm screws on sliding slugs
- weight 3.2 kg/m
- unsupported span max = 1.5 m

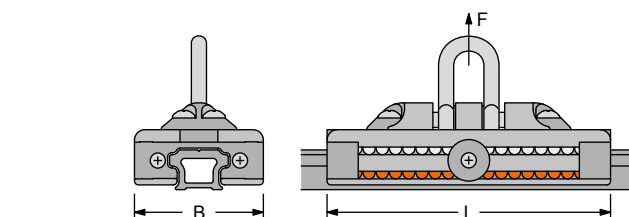


TRAVELLER SELECTION GUIDE FOR: MAINSHEET (END BOOM) & GENOA SHEET

30	32	34	36	38	40	42	44	46	48	LOA (ft)
Mod. 4110 (110 mm)										
			Mod. 4150 (150 mm)							
						Mod. 4190 (190 mm)				




Mod. 4290 STOP PIN

Aluminium slider on nylon inserts and AISI 316 s.steel pin. The stop pin needs to be fitted on the mod. 4520 track.




Mod. 4271 SIMPLE END FITTING

Plastic made, mounted with a 8 mm screw.




Mod. 4272 END FITTING WITH 1 SHEAVE

Aluminium made with one $\varnothing=45$ mm sheave fitted with double side ball bearings. Completed with a shock proof rubber. Weight = 0.21 kg Screws = 3 x $\varnothing 6$ mm




Mod. 4273 END FITTING WITH 1 SHEAVE AND BECKET

Aluminium made with one $\varnothing=45$ mm sheave fitted with double side ball bearings. Completed with a shock proof rubber. Weight = 0.26 kg Screws = 3 x $\varnothing 6$ mm




Mod. 4274 END FITTING WITH 2 SHEAVES

Aluminium made with two $\varnothing=45$ mm sheaves fitted with double side ball bearings. Completed with a shock proof rubber. Weight = 0.28 kg Screws = 3 x $\varnothing 6$ mm




Mod. 4275 END FITTING WITH 2 SHEAVES AND BECKET

Aluminium made with two $\varnothing=45$ mm sheaves fitted with double side ball bearings. Completed with a shock proof rubber. Weight = 0.32 kg Screws = 3 x $\varnothing 6$ mm



Mod. 4276 END FITTING WITH 3 SHEAVES

Aluminium made with three $\varnothing=45$ mm sheaves fitted with double side ball bearings. Completed with a shock proof rubber. Weight = 0.35 kg Screws = 3 x $\varnothing 6$ mm




Mod. 4410 END FITTING CAM-CLEAT

Mod. 4420 110 mm TRAVELLER CAM-CLEAT

Mod. 4430 150/190 mm TRAVELLER CAM-CLEAT

The revolving cam-cleat (3 different positions) can be fitted on the end fitting with one, two or three sheaves. The traveller cam-cleat is not revolving.

main cars - size 110



SIZE 110

For boats up to 36 ft

This traveller, 110 mm long (**SWL = 1000 kg**), is fitted with a special "stand-up" connection for Antal block size 70 mm and includes the "stand-up" rubber. The same traveller is also available with an 8 mm shackle (for this case add /SH to the model number). The complete system includes 1.5 m long track.

The sheet block (OPF 70, page 60) is not included.



COMPLETE SYSTEM

Mod. 4911



Mod. 4271

Mod. 4290

Mod. 4110

COMPLETE SYSTEM

Mod. 4913

CAR CONTROL 2:1



Mod. 4273

Mod. 4410

Mod. 4112

COMPLETE SYSTEM

Mod. 4914

CAR CONTROL 3:1



Mod. 4274

Mod. 4410

Mod. 4113

COMPLETE SYSTEM

Mod. 4915

CAR CONTROL 3:1

Cam-cleat on the car



Mod. 4272

Mod. 4113

Mod. 4420

COMPLETE SYSTEM

Mod. 4916

CAR CONTROL 4:1

Cam-cleat on the car




Mod. 4273

Mod. 4114

Mod. 4420





SIZE 150

For boats up to 42 ft

This traveller, 150 mm long (**SWL = 1400 kg**), is fitted with a special "stand-up" connection for Antal block size 80 mm and includes the "stand-up" rubber. The same traveller is also available with an 8 mm shackle (for this case add /SH to the model number). The complete system includes 1.5 m long track.

The sheet block (OPF 80, page 62) is not included.



COMPLETE SYSTEM

Mod. 4951

CAR CONTROL 3:1



COMPLETE SYSTEM

Mod. 4952

CAR CONTROL 4:1



COMPLETE SYSTEM

Mod. 4953

CAR CONTROL 5:1



COMPLETE SYSTEM

Mod. 4954


CAR CONTROL 4:1 Cam-cleat on the car




COMPLETE SYSTEM

Mod. 4955

CAR CONTROL 5:1 Cam-cleat on the car

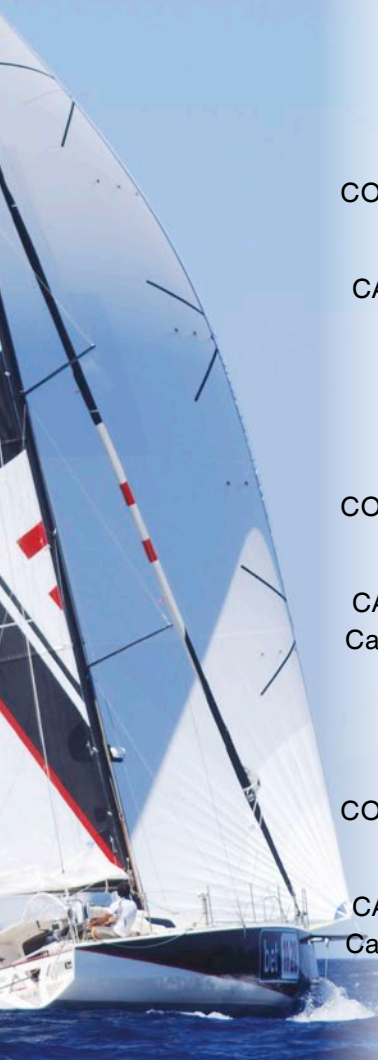

main cars - size 190



SIZE 190

For boats up to 48 ft

This traveller, 190 mm long (**SWL = 1900 kg**), is fitted with a special "stand-up" connection for one (size 100 mm) or two (size 80 mm) Antal sheet blocks and includes the "stand-up" rubber. The same traveller is also available with a 10 mm shackle (for this case add /SH to the model number). The complete system includes 2 m long track. **The sheet blocks (OPF 80 and 100, page 62-63) are not included.**



COMPLETE SYSTEM

Mod. 4991

CAR CONTROL 4:1



Mod. 4194

Mod. 4275

COMPLETE SYSTEM

Mod. 4992

CAR CONTROL 5:1



Mod. 4195

Mod. 4276

Mod. 4410

COMPLETE SYSTEM

Mod. 4993

CAR CONTROL 5:1

Cam-cleat on the car



Mod. 4195

Mod. 4274

Mod. 4430

COMPLETE SYSTEM

Mod. 4994

CAR CONTROL 6:1

Cam-cleat on the car



Mod. 4196

Mod. 4275

Mod. 4430

COMPLETE SYSTEM

Mod. 4995

CAR CONTROL 4:1


Double block version



Mod. 4410

Mod. 4275

Mod. 4199



SIZE 260

For boats up to 52 ft

This traveller, 260 mm long (SWL = 2800 kg), is fitted with a special connection for one (size 100 mm) or two (size 80 mm) Antal sheet blocks and with 55 mm control sheaves.

The complete system includes 2,5 m long track.

The sheet blocks (OPF 80 and 100, page 62-63) are not included.

COMPLETE SYSTEM

Mod. 4921

CAR CONTROL 3:1



COMPLETE SYSTEM

Mod. 4922

CAR CONTROL 4:1



COMPLETE SYSTEM

Mod. 4925

CAR CONTROL 3:1





double and triple main cars


DOUBLE AND TRIPLE CARS

These double and triple cars are particularly made for the long tracks of the catamarans; it is interesting to observe the "inner" position of the control blocks.

MAINSHEET SYSTEM 2:1



Information about the track on page 120

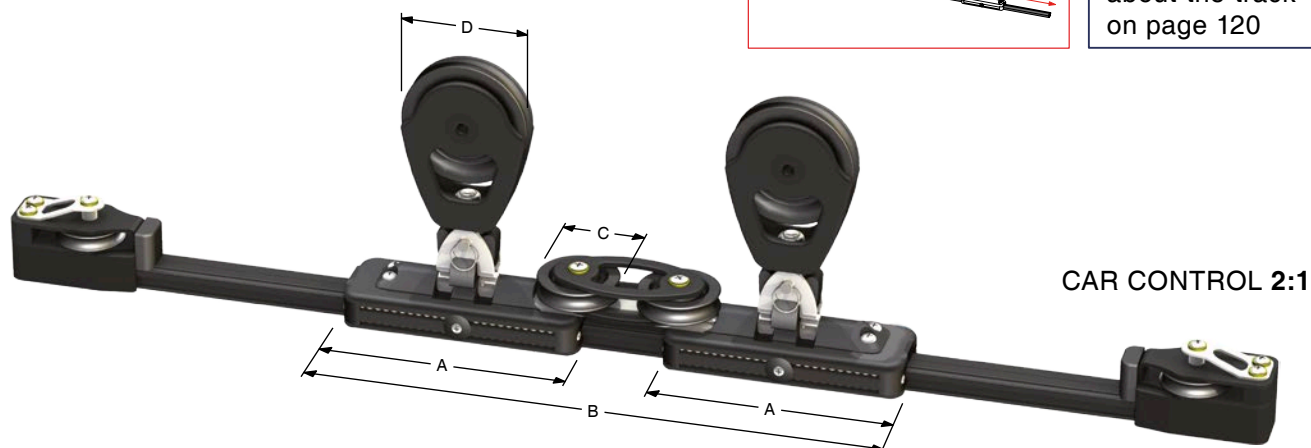


CAR CONTROL 2:1

Mod. 4273/Z

MODEL	A mm	B mm	C mm	D* mm	SWL kg
5154	2 x 150	334	2 x 50	2 x 80	2800
5194	2 x 190	420	2 x 65	2 x 100	3800

* Sheet blocks **not** included.

MAINSHEET SYSTEM 4:1



CAR CONTROL 2:1

Mod. 5195


The triple car is obtained with 2x150 and 1x190 mm long cars, two D=65 mm blocks for a 2:1 control.

Two D=80 mm and one D=100 mm blocks for the sheet are **not** included.

Total length = 580 mm **SWL = 4400 kg**

For catamarans up to 60 ft LOA

Mod. 4273/Z



End fitting, 1 sheave (D=55 mm) and becket





SIZE 150

For boats up to 42 ft

This 150 mm long traveller (SWL = 1400 kg) is fitted with one 60 mm sheave, for the genoa sheet, and two 45 mm sheaves for the car control. All these sheaves are made of high strength resin with a double side ball bearing.

End fitting, 2 sheaves (D=45 mm) and becket

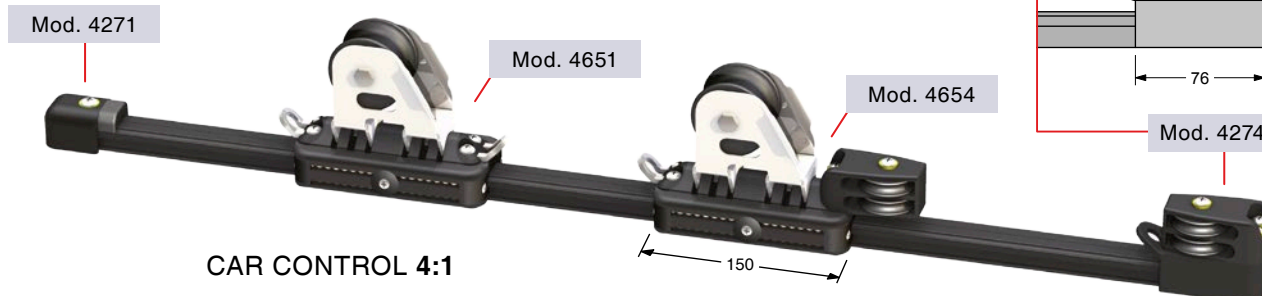



SIZE 190

For boats up to 48 ft

This 190 mm long traveller (SWL = 1900 kg) is fitted with one 75 mm aluminium sheave with Composite Fibre main bearing for the genoa sheet, and two 55 mm resin sheaves for the car control. All these sheaves are made with a double side ball bearing.


End fitting, 2 sheaves (D=55 mm) and becket

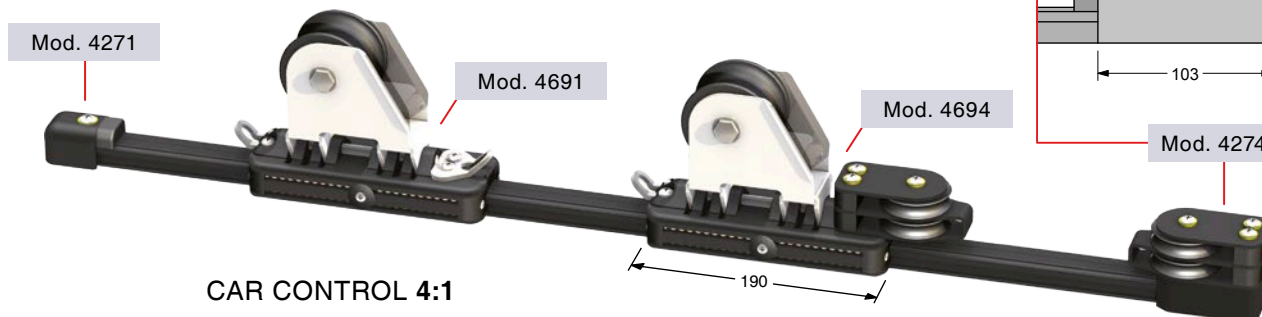

SIZE 260

For boats up to 52 ft

This 260 mm long traveller (SWL = 2800 kg) is fitted with one 75 mm aluminium sheave with Composite Fibre main bearing for the genoa sheet, and one 55 mm resin sheave for the car control. All these sheaves are made with a double side ball bearing.

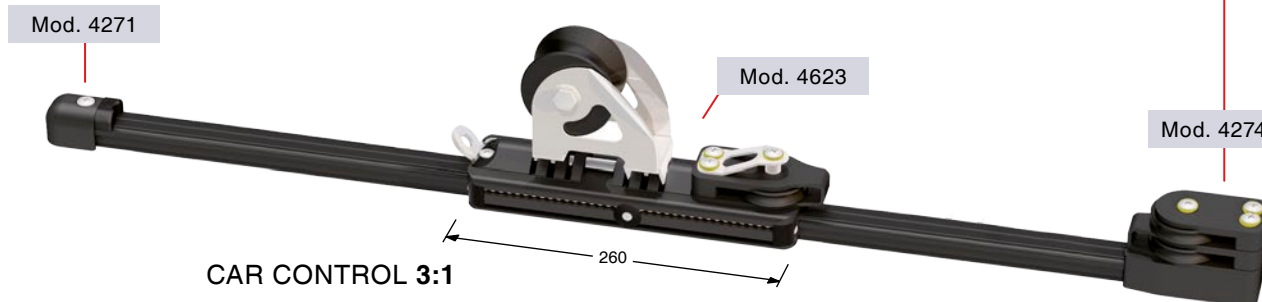

Mod. 4290

Systems of this page may be completed with the adjustable stop pin mod. 4290 (only with track mod. 4520).


ball bearing cars for Dyneema links

CARS FOR DYNEEMA LINKS

Three ball bearing models, 110, 150 and 190 mm long, for the same track 31x21 (see page 116) fitted with a special aluminium pivoting bracket suitable for Dyneema links, for both: 2 side control lines and one central connection for a sheet block or a sheet Ring.

MODEL	L mm	B mm	SWL kg	WEIGHT kg
4110/D	110	70	1000	0.45
4150/D	150		1400	0.65
4190/D	190		1900	0.85


For tracks and track end fittings, see page 120.

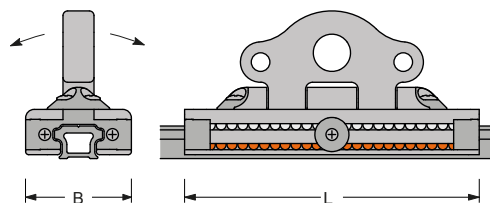

Farnova 60

TRANSVERSAL CARS FOR GENOA SHEET

The transversal car is fitted with a direct control for car moving outwards and inwards. A ring, through which the sheet runs, allows the height control of the genoa sheet. For tracks and track end fittings, see page 120. For Rings, see the Ring section on page 172.

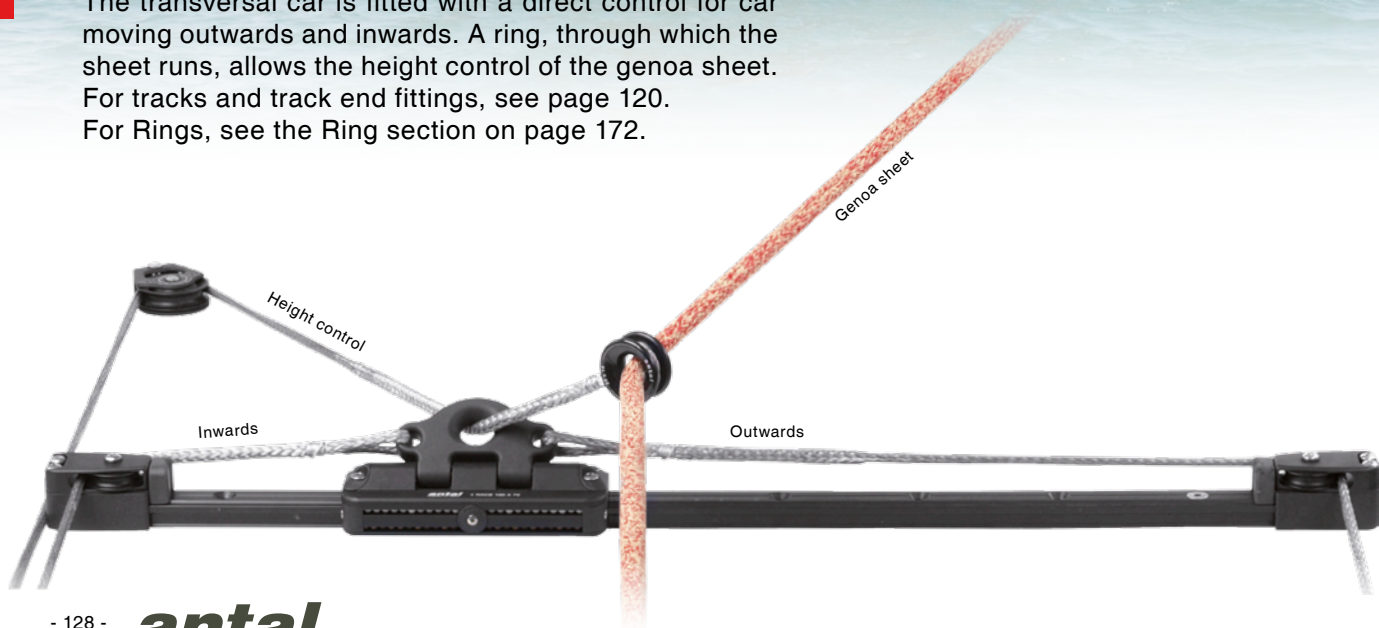


CARS FOR MAINSHEET

A Looper block, size 80, for the mainsheet in the centre and two smaller side blocks, size 60, for the car control are linked by Dyneema Snap Loops to a size 190 ball bearing car. This solution, with SWL = 1900 kg is suitable for boats up to 48 ft.

For blocks, see Looper block section on page 72.

For Dyneema Snap Loop, see page 177.


For tracks and accessories, see page 120.

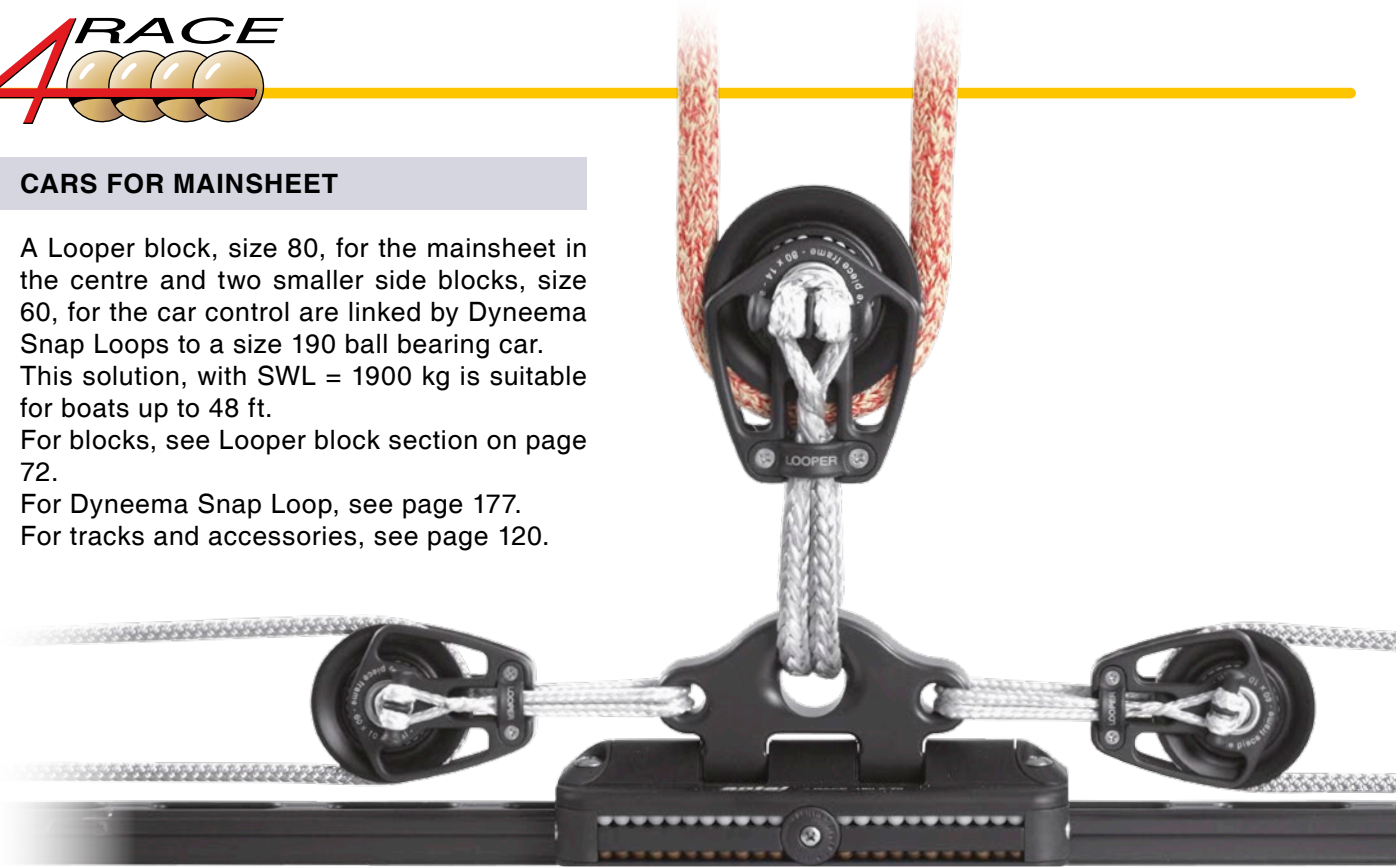




For larger boats up to 60 ft and SWL up to 3800 kg, two cars can be linked together. Two Looper blocks, size 80, for the sheet and two Looper blocks, size 60, for car control complete this double 190 mm car.



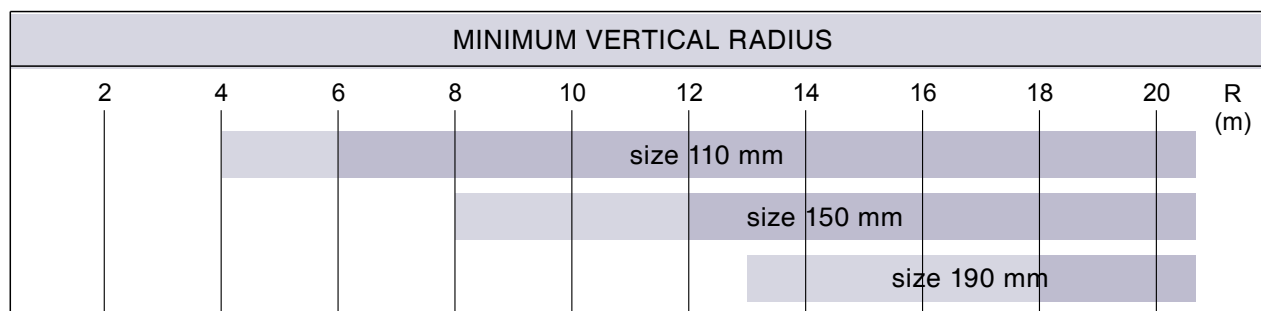

Custom solution with two extra-long cars (2 x 230 mm) and SWL 4800 kg. Two Looper blocks, size 100, for the mainsheet and two Looper blocks, size 70, for the side control, complete this solution designed for a 65 ft boat.

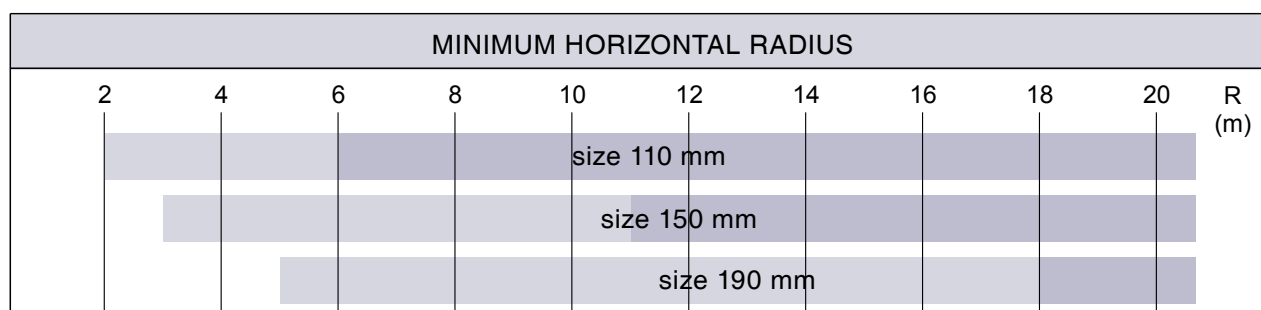

 Acceptable
  Acceptable but with a reduction of the working load
 R = vertical bending




 Acceptable
  Acceptable only for a modified car
 R = horizontal bending



Horizontally curved track with a size 110 car.


MAXIMUM BENDING (MINIMUM RADIUS) FOR ANTAL TRACKS

On request Antal will supply bent tracks whether in the vertical or in the horizontal plane. Minimum radius for different lengths of the car: 110, 150 and 190 mm are quoted on the tables.



To find the value of the curved radius start from the length L and height F of the arch using the following approximate formula (R, L and F will be measured with the same unit of length):

$$R = \frac{L^2}{8 \cdot F}$$

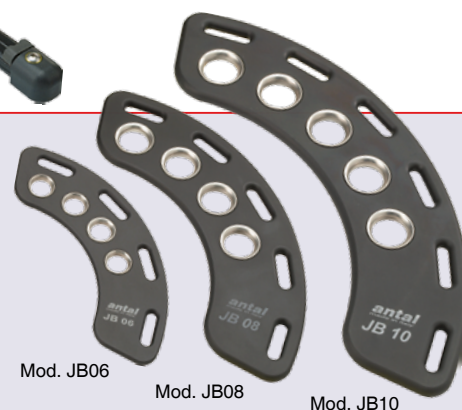

SELF-TACKING JIB BOARDS

5 hard black anodized aluminium models for "webbing" connection to the sail.

There are 4/5 different positions for the sheet block that will be simply fixed with an HR shackle.

SELF-TACKING SYSTEMS

Antal has two solutions for self-tacking using track and travellers of the new "4RACE" system.

The first solution (Dwg. 1) needs a "footblock" for the sheet on one side of the track; the sheet, from this footblock, goes to the cockpit. In this case the track will be curved only in the horizontal plane.

In the second solution (Dwg. 2 and 3) the sheet climbs up the mast then down and to the cockpit as a halyard. In this case the track will be curved vertically and trimmed forward. Travellers with one or two sheet blocks will be used.


Double cars are often considered because a shorter car accepts a smaller radius.

To control the traveller moving it will be useful to consider also two side stop-pins (mod. 4290) and consequently the track for stop pin (mod. 4520).


Systems of drawings 1 and 2 are obtained with 2 x 110 mm travellers and 2 x 70 mm blocks (for boats up to 50 ft), or 2 x 150 mm travellers and 2 x 80 mm blocks (for boats over 50 ft).



MODEL	R mm	SWL kg	WEIGHT kg	A x B mm	HR SHACKLE mm
JB06	110	1000	0.10	6 x 18	6
JB08	150	1800	0.25	7 x 20	8
JB10	210	3000	0.60	7 x 24	10
JB12	270	5000	1.60	8 x 40	12
JB14	385	7000	3.85	12 x 50	14

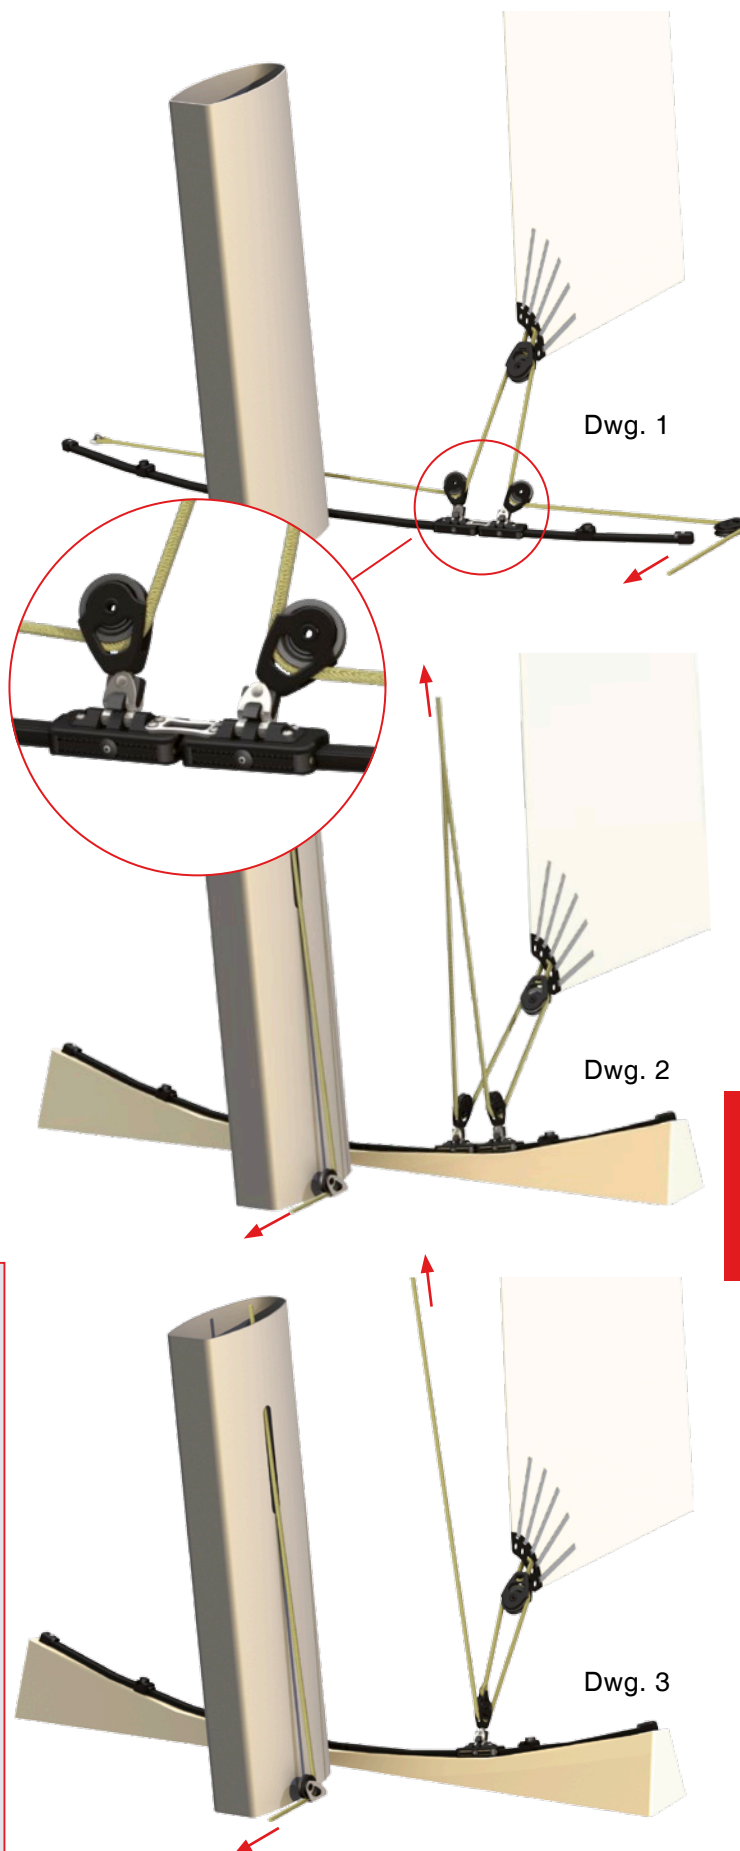

maxi 47 - sizes 230/330/430

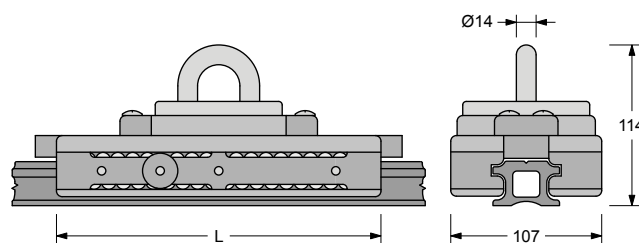

TRAVELLER LOAD AND SIZE			
MODEL	L mm	SWL kg	WEIGHT kg
614.219	230	3800	2.10
614.229	330	5800	3.00
614.239	430	7200	3.90



Mod. 601.123 **MAXI TRACK 47**


Hard black anodized light alloy extrusion.
Weight = 1.8 kg/m
Fasteners = 10 mm screws / 100 mm spacing.

Mod. 601.123/R **MAXI 47 RACE VERSION**

As the previous one with lightening holes.
Weight = 1.15 kg/m


Mod. 601.223 **MAXI 47 WITH STOP-PIN HOLES**

As the above Maxi track 47 with stop-pin holes.




Mod. 691.822 **DOUBLE ADJUSTABLE STOP-PIN**

Special double stop-pin with two independent "screw pins" (distance 50 mm). Only for track mod. 601.223




Mod. 691.560 **SIMPLE END FITTING**

Hard black anodized aluminium base with shock proof rubber.
Weight = 0.40 kg Fasteners = 2xØ10 mm screws




Mod. 691.561 **END FITTING WITH 1 SHEAVE**

Hard black anodized aluminium base, one D=75 mm sheave, one becket and shock proof rubber.
Weight = 0.90 kg Fasteners = 2xØ10 mm screws



Mod. 691.563 **END FITTING WITH 2 SHEAVES**

Hard black anodized aluminium base, two D=75 mm sheave, one becket and shock proof rubber.
Weight = 1.05 kg Fasteners = 2xØ10 mm screws



MAINSHEET SYSTEM, MAXI 47 TRACK SIZE 230 TRAVELLER


For boats up to 60 ft

One 120 mm block, OPF series, can be fitted with a padeye and spring on the car for the mainsheet; one or two 75 mm sheaves for the car control.


Car control 2:1, 3:1 and 4:1 are shown below. The mainsheet block is not included.

SWL = 3800 kg


CAR CONTROL 2:1

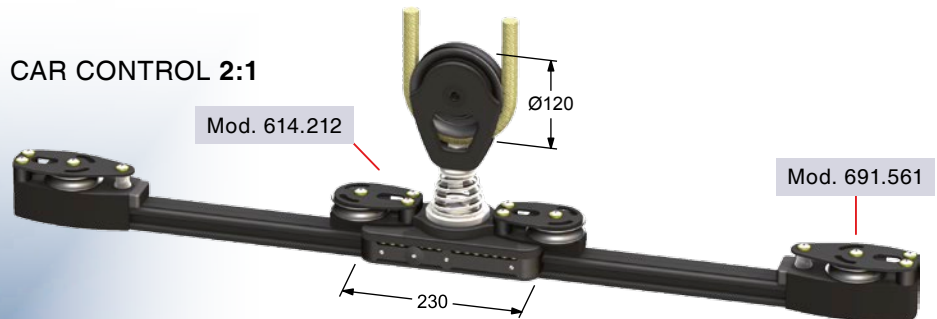

CAR CONTROL 3:1

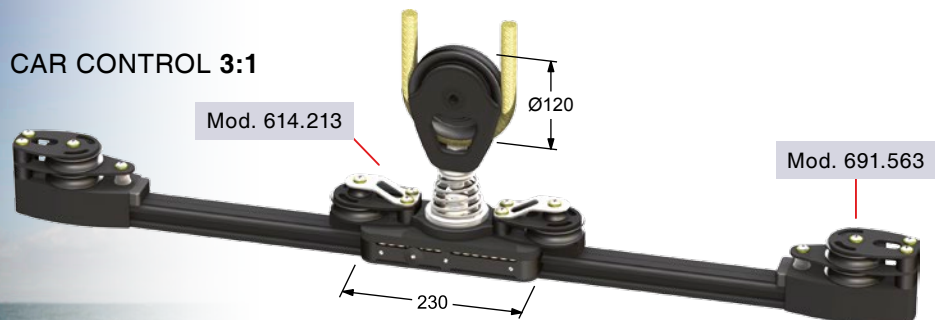


CAR CONTROL 4:1

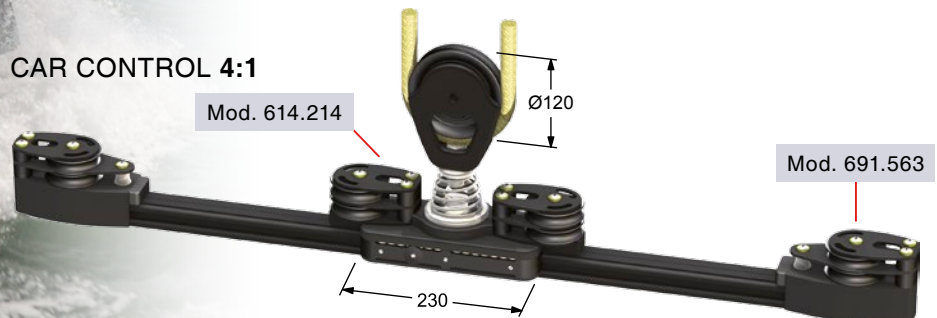

Fora Marine - Destination Calais

SELF-TACKING SOLUTION

On the maxi 47 track there is a 230 mm with 2 blocks size 120 mm (OPF series). Sheet blocks are not included.

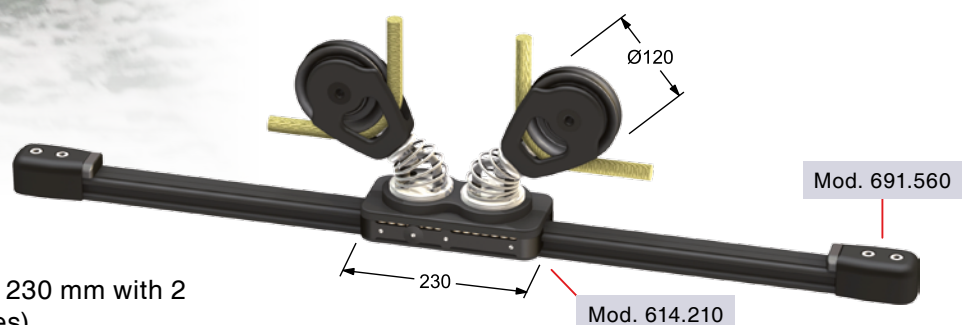


maxi 47 - size 330



MAINSHEET SYSTEM, MAXI 47 TRACK SIZE 330 TRAVELLER

For boats up to 70 ft

Information about the
track on page 132



1x140 or 2x120 mm blocks (OPF series) can be fitted with a padeye and spring on the car for the mainsheet; one or two 75 mm sheaves for the car control.

Car control 2:1 and 3:1 are shown below.


The mainsheet block is not included.

SWL = 5800 kg


CAR CONTROL 2:1




CAR CONTROL 3:1

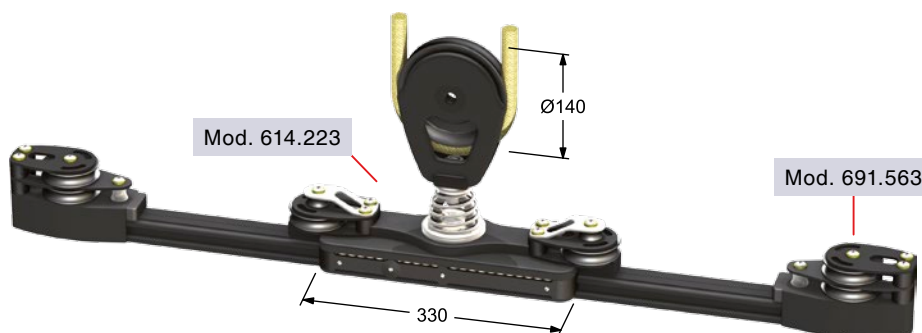

CAR CONTROL 2:1

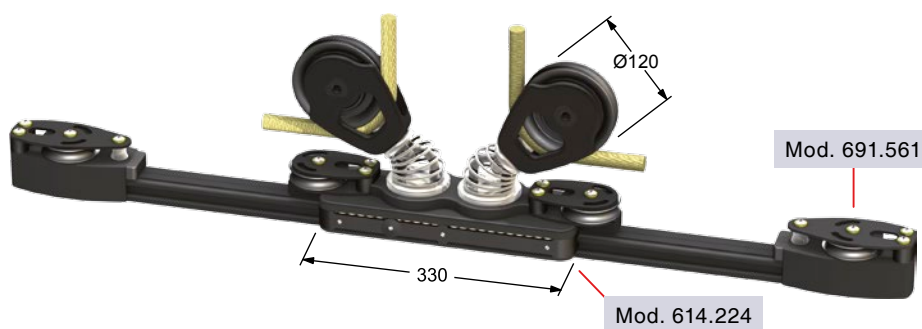

CAR CONTROL 3:1

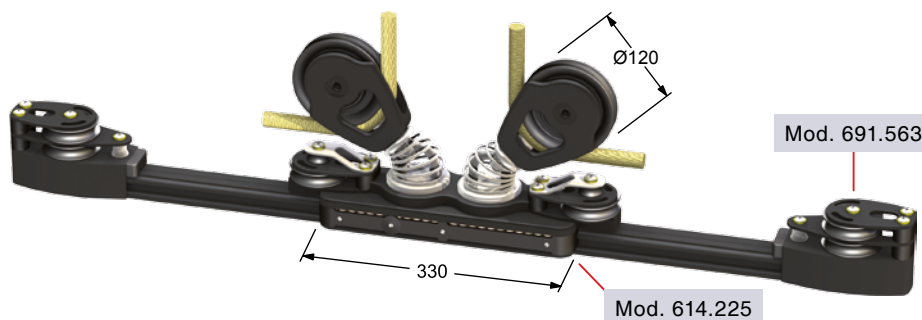

MAINSHEET SYSTEM, MAXI 47 TRACK SIZE 430 TRAVELLER


For boats up to 80 ft

2x120 or 3x120 mm blocks (OPF series) can be fitted with a padeye and spring on the car for the mainsheet; one or two 75 mm sheaves for the car control. Car control 2:1 and 3:1 are shown below.


The mainsheet block is not included.

SWL = 7200 kg


Information about the track on page 132



CAR CONTROL 2:1

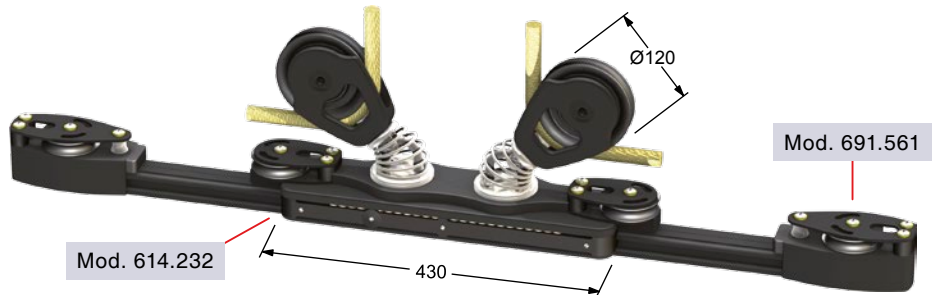

CAR CONTROL 3:1

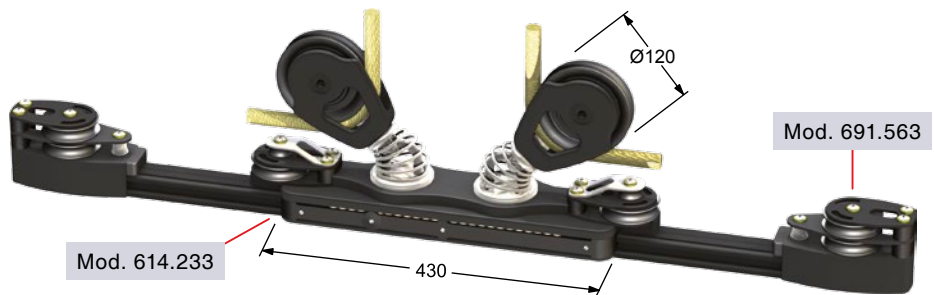


CAR CONTROL 2:1



CAR CONTROL 3:1



maxi 67 - sizes 330 / 430

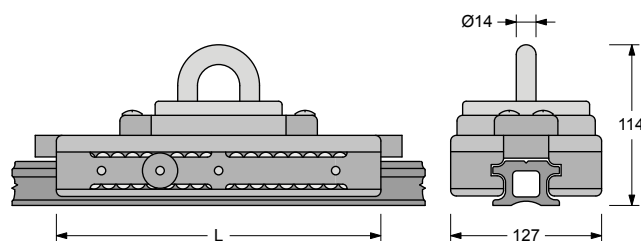


TRAVELLER LOAD AND SIZE

MODEL	L mm	SWL kg	WEIGHT kg
615.229	330	5800	4.30
615.239	430	7200	5.50




Mod. 601.124 **MAXI TRACK 67**

Hard black anodized light alloy extrusion.
Weight = 2.4 kg/m
Fasteners = 12 mm screws / 100 mm spacing.




Mod. 691.660 **SIMPLE END FITTING**

Hard black anodized aluminium base with shock proof rubber.
Weight = 0.60 kg Fasteners = 2xØ12 mm screws




Mod. 691.661 **END FITTING WITH 1 SHEAVE**

Hard black anodized aluminium base, one D=100 mm sheave (Opf series p.63), one becket and shock proof rubber.
Weight = 1.30 kg Fasteners = 2xØ12 mm screws



Mod. 691.663 **END FITTING WITH 2 SHEAVES**

Hard black anodized aluminium base, two D=100 mm sheave (Opf series p.63), one becket and shock proof rubber.
Weight = 1.50 kg Fasteners = 2xØ12 mm screws



CUSTOM MODEL

Two cars 330 mm long
and two blocks 150 mm
diameter.
SWL = 2 x 5800 kg




MAINSHEET SYSTEM, MAXI 67 TRACK
SIZE 330-430 TRAVELLER SWL = 5800-7200 kg

D=140 mm or D=120 mm blocks (OPF series) can be fitted with a padeye and spring on the car for the mainsheet; two D=100 mm sheaves for the car control.

Car control 2:1 and 3:1 are shown below.

The mainsheet block is not included.

Information about the track on page 136

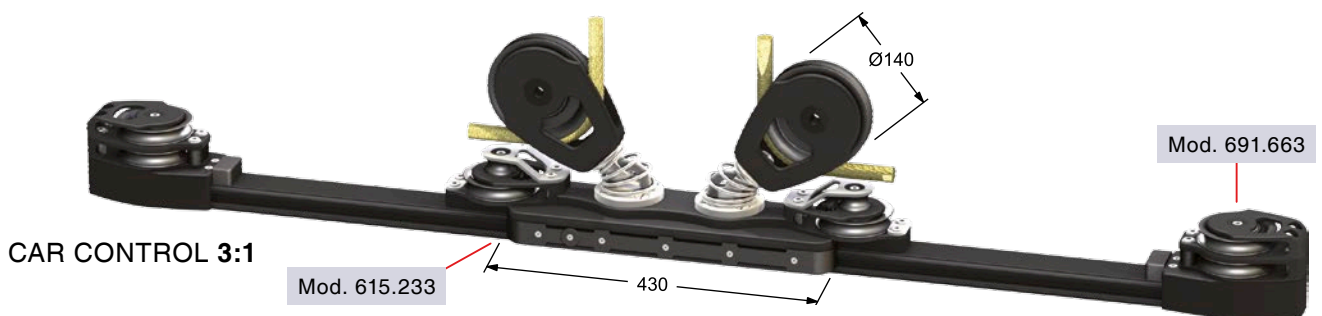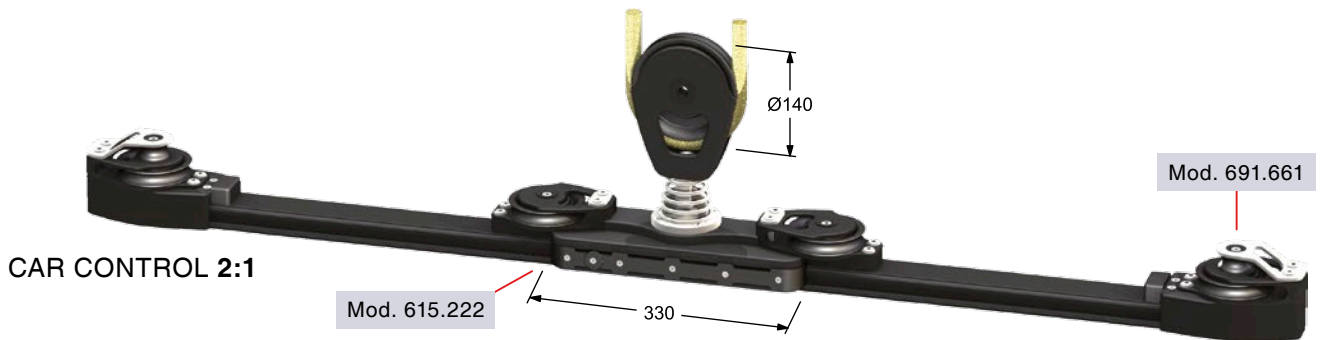

antal for maxi yachts




For boats over 150 ft

Mod. 911.254

BLOCK

250 mm block on Composite Fibre bushing and 2 side ball bearings.

Weight = 14.35 kg **SWL = 20000 kg**

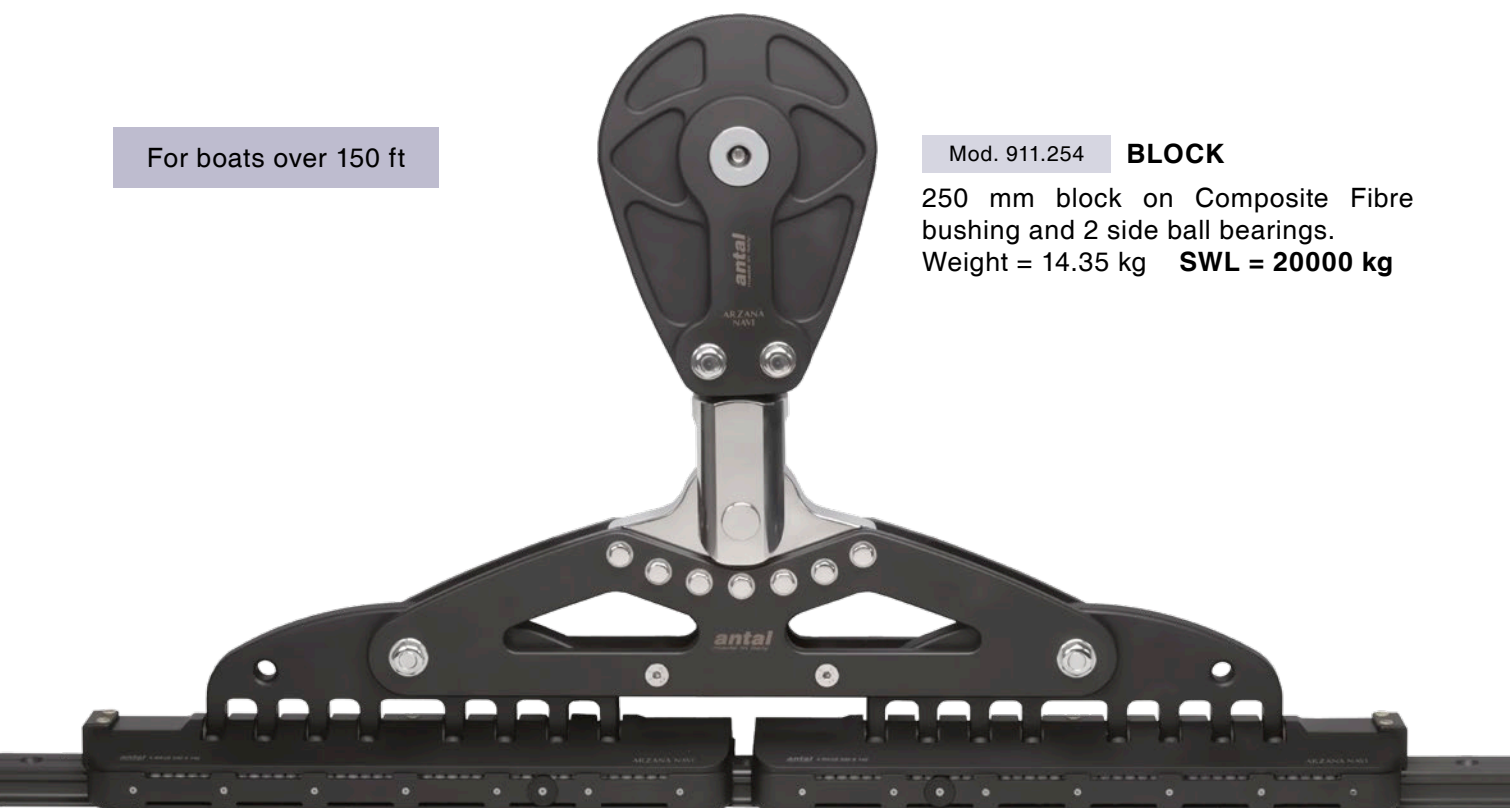

TRAVELLERS

2 x 530 mm long, hard black anodized aluminium one-piece body on Torlon ball bearings Antal 4Race system (Each traveller works on 424 balls).


Weight = 26 kg **SWL = 18000 kg**

TRACK MAXI 67

Hard black anodized and teflon coated aluminium extrusion 4Race system.

Weight = 2.40 kg/m

Fasteners = 12 mm screws / 100 mm spacing

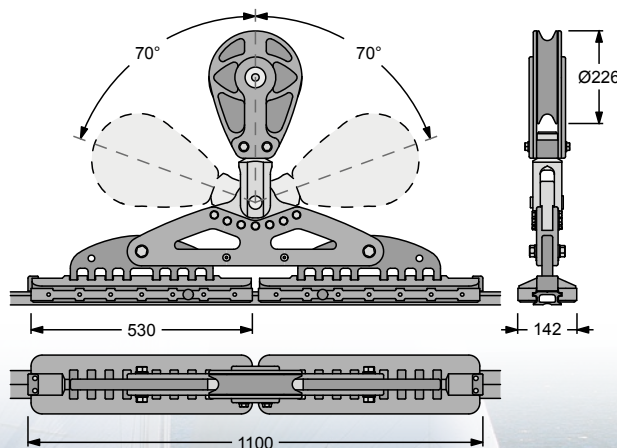

safety device for outboard cleaning and maintenance



The operator (using a suitable harness) is tied to a double traveller that slides horizontally on the rail and is free to reach the working area in perfect safety.

The double traveller is fitted with two shackles and a stop pin:

- stop pin open: it allows the traveller to slide along the whole track;
- stop pin closed: it locks the traveller when it intercepts the first hole in the rail.

Other travellers (without any stop pin) can be connected to the main traveller for further security and for carrying tools or any other material (bosun's chair, etc.)

The system consists of:



Mod. 4523 Tubular track (31x21 mm) in high resistance hard black (silver on request) anodized extruded aluminium, Ø8 mm fixing screws every 100 mm, holes to stop the traveller every 50 mm, weight 0.75 kg/m, available in 3 m lengths.

Mod. 4271 Plastic end fitting with rubber protection.

Mod. 4118 Hard black anodized aluminium double traveller (2x110 mm). The traveller slides on four circuits of Torlon balls and its hold is guaranteed even in the event of the balls failing. Two AISI 316 steel shackles with 180° rotation.

Mod. 4290 Aluminium stop pin on nylon guides.

Mod. 4283 Track joint.

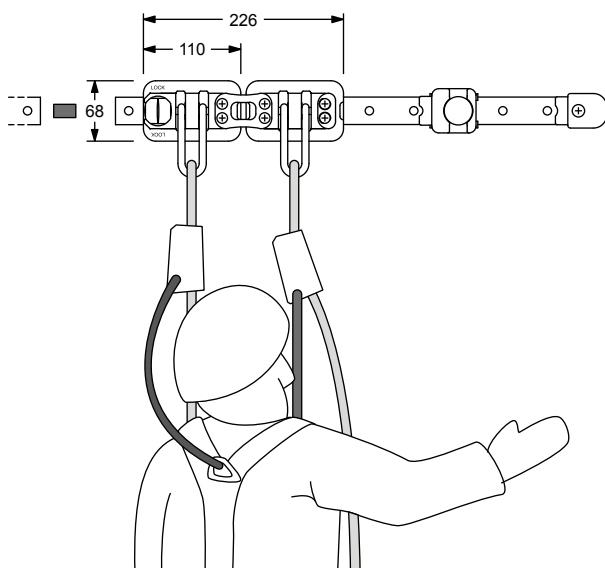

The track can be fixed both on a horizontal surface and on a vertical wall.





full batten systems



HS guide systems..... 142



Fibreball systems..... 151



special products..... 162



batten receptacles 164



6 different tracks and 14 slider systems, a wide and complete range for full-batten mainsails, for boats from 30 to 100 ft and for multihulls.

HS GUIDE SYSTEMS

A simple and efficient solution with minimum sizes for very high loads, designed for racing. The HS guide systems have been developed also for cruising and charter boats.

NEW FIBREBALL SYSTEMS

Designed for large boats and for mainsails with a large roach, they offer the high strength of HS Fibre Guides (for tension load) and the low friction of the Torlon ball bearing (for compression).

full batten HS guide systems



HS SYSTEM




The Antal HS Guide System is designed for boats with full batten mainsails that experience high loads and compression-loading on the mainsail luff. The system's aluminium sliders contain HS composite fibre inserts that run on aluminium track mounted on the mast. HS composite fibre is a new material that is durable over long periods of use and offers extremely low friction coefficients. The material is made from special resins strengthened with fibre and is self lubricating.

The HS Guide System provides the following advantages:

- the low friction properties of the HS composite fibre allows the cars to be shorter than standard ball-bearing car systems, thereby reducing the stacking height at the mast when the sail is down;
- the lower cars can easily be removed from the track when the sail is reefed, thereby keeping the tack low to the boom;
- minimum friction under load;
- less maintenance than ball bearing car systems;
- cars can easily be removed and re-installed on the track whenever the mainsail is changed.

Each batten end fitting is attached to a slider with a triaxial joint to ensure that the batten can freely orient itself under all points of sail.

At least one simple slider should be attached to the sail with nylon webbing between two battens. A headboard is attached to the sail with webbing and is secured to the slider (double or triple) with a clevis pin which allows the headboard to pivot and to be removed.



TRACK	SYSTEM	FOR BOATS UP TO	PAGE
HS 22	40	40'	143
	50/R	50' (Racing)	144
	60/R	60' (Racing)	145
HS 24	50	50'	146
	60	60'	147
	70	70'	148
HS 30	90	80'	149
	130	100'	150

HS22.40 system

HS22 Track 40 mm sliders For boats up to 40 ft


HS22.40 system sliders run on inserts made of self-lubricating resin.



Mod. HS22.40D

HEADBOARD SLIDERS

Length = 130 mm
Weight = 0.19 kg
SWL = 700 kg (horizontal)



Track and
accessories
on page 156

Mod. HS22.40S

SIMPLE SLIDER

Length = 40 mm
Weight = 0.04 kg
SWL = 350 kg (horizontal)
16 mm webbing

Mod. HS22.40J

SLIDER WITH JOINT

Length = 40 mm
Weight = 0.07 kg
SWL = 350 kg (horizontal)
10 MA Threaded Pin

Mod. HS22.44

HEADBOARD 40°

Height = 122 mm
Width = 126 mm
Weight = 0.11 kg
SWL = 1300 kg (vertical)
20 mm webbing

Mod. HS22.46

HEADBOARD 60°

Height = 122 mm
Width = 145 mm
Weight = 0.12 kg
SWL = 1300 kg (vertical)
20 mm webbing

Mod. HS22.49

HEADBOARD 90°

Height = 118 mm
Width = 100 mm
Weight = 0.09 kg
20 mm webbing

Mod. 609.320

SBR RECEPTACLE

on page 164

SYSTEM HS22.40/R


FOR RACING BOATS UP TO 40 ft

As system HS22.40, but with sliders on HS fiber guides instead of resin guides (/R)

Mod. HS22.40D/R **HEADBOARD SLIDERS**

Mod. HS22.40S/R **SIMPLE SLIDER**

Mod. HS22.40J/R **SLIDER WITH JOINT**



Mod. HS22.70JA/R

ASYMMETRIC SLIDER WITH JOINT

For inclined battens of Top-Square sails
Length = 70 mm
Weight = 0.15 kg
SWL = 600 kg
10 MA Threaded Pin

HS22.50/R system

HS22 Track 50 mm sliders For 50 ft racing boats


Mod. HS22.50D/R

HEADBOARD SLIDERS

Length = 150 mm

Weight = 0.33 kg

SWL = 1600 kg (horizontal)



Track and
accessories
on page 156

Mod. HS22.50S/R

Mod. HS22.70J/R

SLIDER WITH JOINT

Top batten

Length = 70 mm

Weight = 0.23 kg

SWL = 1300 kg (horizontal)

12 MA Threaded Pin

Mod. HS22.50S/R

SIMPLE SLIDER

Length = 50 mm

Weight = 0.08 kg

SWL = 800 kg (horizontal)

18 mm webbing

Mod. HS22.50J/R

SLIDER WITH JOINT

Lower battens

Length = 50 mm

Weight = 0.14 kg

SWL = 800 kg (horizontal)

10 MA Threaded Pin

Mod. HS24.54

HEADBOARD 40°

Height = 136 mm

Width = 147 mm

Weight = 0.19 kg

SWL = 2000 kg (vertical)

25 mm webbing

Mod. HS24.56

HEADBOARD 60°

Height = 136 mm

Width = 182 mm

Weight = 0.25 kg

SWL = 2000 kg (vertical)

25 mm webbing

Mod. HS24.59

HEADBOARD 90°

Height = 146 mm

Width = 120 mm

Weight = 0.18 kg

SWL = 2000 kg (vertical)

25 mm webbing

Mod. HS22.100JA/R

ASYMMETRIC SLIDER WITH JOINT

For inclined battens of
Top-Square sails

Length = 100 mm

Weight = 0.32 kg

SWL = 1400 kg

10 MA Threaded Pin

Mod. 609.321

SBR RECEPTACLE

on page 164

HS22.60/R system

HS22 Track 60 mm sliders For 60 ft racing boats


Mod. HS22.60T/R

HEADBOARD SLIDERS

Length = 201 mm

Weight = 0.65 kg

SWL = 3900 kg (horizontal)



Track and
accessories
on page 156

Mod. HS22.50S/R

Mod. HS22.90J/R

SLIDER WITH JOINT

Top batten

Length = 90 mm

Weight = 0.29 kg

SWL = 1300 kg (horizontal)

12 MA Threaded Pin

Mod. HS22.50S/R

SIMPLE SLIDER

Length = 50 mm

Weight = 0.08 kg

SWL = 800 kg (horizontal)

20 mm webbing

Mod. HS22.60J/R

SLIDER WITH JOINT

Lower battens

Length = 60 mm

Weight = 0.20 kg

SWL = 1300 kg (horizontal)

12 MA Threaded Pin

Mod. HS22.110

SLIDER OUTHAUL

Length = 110 mm

Weight = 0.30 kg

SWL = 1800 kg (horizontal)

For two 25 mm webbing

Mod. HS24.64

HEADBOARD 40°

Height = 182 mm

Width = 193 mm

Weight = 0.43 kg

SWL = 3500 kg (vertical)

35 mm webbing

Mod. HS24.66

HEADBOARD 60°

Height = 182 mm

Width = 240 mm

Weight = 0.54 kg

SWL = 3500 kg (vertical)

For 35 mm webbing

Mod. HS24.69

HEADBOARD 90°

Height = 180 mm

Width = 142 mm

Weight = 0.38 kg

SWL = 3500 kg (vertical)

35 mm webbing

Mod. 609.323

SBR RECEPTACLE

on page 165

HS24.50 system

Track HS24 50 mm Sliders For 50 ft boats

Mod. HS24.50D

HEADBOARD SLIDERS


Length = 150 mm

Weight = 0.37 kg

SWL = 1600 kg (horizontal)

50

50



Mod. HS24.50S

SIMPLE SLIDER

Length = 50 mm

Weight = 0.09 kg

SWL = 800 kg (horizontal)

18 mm webbing

50

Mod. HS24.50J

SLIDER WITH JOINT

Length = 50 mm

Weight = 0.14 kg

SWL = 800 kg (horizontal)

10 MA Threaded Pin

50

Mod. HS24.54

HEADBOARD 40°

Height = 136 mm

Width = 147 mm

Weight = 0.19 kg

SWL = 2000 kg (vertical)

25 mm webbing

Mod. HS24.56

HEADBOARD 60°

Height = 136 mm

Width = 182 mm

Weight = 0.25 kg

SWL = 2000 kg (vertical)

25 mm webbing

Mod. HS24.59

HEADBOARD 90°

Height = 146 mm

Width = 120 mm

Weight = 0.18 kg

SWL = 2000 kg (vertical)

25 mm webbing

Mod. HS24.110JA

ASYMMETRIC SLIDER WITH JOINT

For inclined battens of
Top-Square sails

Length = 110 mm

Weight = 0.38 kg

SWL = 1600 kg

10 MA Threaded Pin

110

Mod. 609.321

SBR RECEPTACLE

on page 164

HS24.60 system

Track **HS24** **60 mm** Sliders For **60 ft** boats


Mod. HS24.60T

HEADBOARD SLIDERS

Length = 201 mm

Weight = 0.73 kg

SWL = 3900 kg (horizontal)



Mod. HS24.50S

Mod. HS24.60J

SLIDER WITH JOINT

Top batten

Length = 60 mm

Weight = 0.21 kg

SWL = 1300 kg (horizontal)

12 MA Threaded Pin

Mod. HS24.50S

SIMPLE SLIDER

Length = 50 mm

Weight = 0.09 kg

SWL = 800 kg (horizontal)

18 mm webbing

Mod. HS24.50J

SLIDER WITH JOINT

Lower battens

Length = 50 mm

Weight = 0.14 kg

SWL = 800 kg (horizontal)

10 MA Threaded Pin

Mod. HS24.64

HEADBOARD 40°

Height = 182 mm

Width = 193 mm

Weight = 0.43 kg

SWL = 3500 kg (vertical)

35 mm webbing

Mod. HS24.66

HEADBOARD 60°

Height = 182 mm

Width = 240 mm

Weight = 0.54 kg

SWL = 3500 kg (vertical)

35 mm webbing

Mod. HS24.69

HEADBOARD 90°

Height = 180 mm

Width = 142 mm

Weight = 0.38 kg

SWL = 3500 kg (vertical)

35 mm webbing

Mod. 609.323

SBR RECEPTACLE

on page 165

system HS24.70

Track HS24

Sliders 70 mm

For boats 70 ft


Mod. HS24.70Q

HEADBOARD SLIDERS

Length = 340 mm

Weight = 1.28 kg

SWL = 5200 kg (horizontal)



Mod. HS24.50S

SIMPLE SLIDER

Length = 50 mm

Weight = 0.09 kg

SWL = 800 kg (horizontal)

18 mm webbing

Mod. HS24.70J

SLIDER WITH JOINT

Top batten

Length = 70 mm

Weight = 0.24 kg

SWL = 1500 kg (horizontal)

14 MA Threaded Pin

Mod. HS24.50S

Mod. HS24.60J

SLIDER WITH JOINT

Lower batten

Length = 60 mm

Weight = 0.21 kg

SWL = 1300 kg (horizontal)

12 MA Threaded Pin

Mod. HS24.74

HEADBOARD 40°

Height = 281 mm

Width = 279 mm

Weight = 1.06 kg

SWL = 5000 kg (vertical)

40 mm webbing

Mod. HS24.76

HEADBOARD 60°

Height = 281 mm

Width = 359 mm

Weight = 1.18 kg

SWL = 5000 kg (vertical)

40 mm webbing

Mod. HS24.79

HEADBOARD 90°

Height = 225 mm

Width = 180 mm

Weight = 0.71 kg

SWL = 5000 kg (vertical)

40 mm webbing

Mod. 609.325

SBR RECEPTACLE

on page 165

system HS30.90

Track HS30 Sliders 90/110 mm For boats 80-90 ft


Mod. HS30.70Q

HEADBOARD SLIDERS

Length = 340 mm

Weight = 1.63 kg

SWL = 5200 kg (horizontal)



Track and accessories
on page 159

Mod. HS30.70S

Mod. HS30.110J

SLIDER WITH JOINT

Top batten

Length = 110 mm

Weight = 0.47 kg

SWL = 2200 kg (horizontal)

14 MA Threaded Pin

Mod. HS30.70S

SIMPLE SLIDER

Length = 70 mm

Weight = 0.20 kg

SWL = 1300 kg (horizontal)

25 mm webbing

Mod. HS30.90J

SLIDER WITH JOINT

Lower batten

Length = 90 mm

Weight = 0.39 kg

SWL = 1900 kg (horizontal)

14 MA Threaded Pin

Mod. HS30.116

SLIDER OUTHAUL

Length = 116 mm

Weight = 0.32 kg

SWL = 2500 kg (horizontal)

2 X 25 mm webbings

Mod. HS30.74

HEADBOARD 40°

Height = 281 mm

Width = 279 mm

Weight = 1.30 kg

SWL = 6200 kg (vertical)

40 mm webbing

Mod. HS30.76

HEADBOARD 60°

Height = 281 mm

Width = 359 mm

Weight = 1.47 kg

SWL = 6200 kg (vertical)

40 mm webbing

Mod. HS30.79

HEADBOARD 90°

Height = 225 mm

Width = 180 mm

Weight = 0.88 kg

SWL = 6200 kg (vertical)

40 mm webbing

Mod. 609.325

SBR RECEPTACLE

on page 165

HS30.130 system

HS30 Track 130 mm Sliders For 100 ft boats


Mod. HS30.90Q

HEADBOARD SLIDERS

Length = 366 mm

Weight = 1.88 kg

SWL = 6600 kg (horizontal)



Mod. HS30.70S

SIMPLE SLIDER

Length = 70 mm

Weight = 0.20 kg

SWL = 1300 kg (horizontal)

25 mm webbing

Mod. HS30.130J

SLIDER WITH JOINT

Length = 130 mm

Weight = 0.75 kg

SWL = 3000 kg (horizontal)

16 MA Threaded Pin

Mod. HS30.116

SLIDER OUTHAUL

Length = 116 mm

Weight = 0.32 kg

SWL = 2500 kg (horizontal)

2 X 25 mm webbing

Mod. HS30.74

HEADBOARD 40°

Height = 281 mm

Width = 279 mm

Weight = 1.30 kg

SWL = 6200 kg (vertical)
40 mm webbing

Mod. HS30.76

HEADBOARD 60°

Height = 281 mm

Width = 359 mm

Weight = 1.47 kg

SWL = 6200 kg (vertical)
40 mm webbing

Mod. HS30.79

HEADBOARD 90°

Height = 225 mm

Width = 180 mm

Weight = 0.88 kg

SWL = 6200 kg (vertical)
40 mm webbing

Mod. 609.326

SBR RECEPTACLE

on page 165

full batten Fibreball system



NEW FIBREBALL SYSTEMS



Designed for large boats and for mainsails with a large roach, they offer the high strength of HS Fibre Guides (for tension load) and the low friction of the Torlon ball bearing (for compression).

Maximum load because the HS fibre guides give excellent resistance to the main pull loads despite the compact size of the carriages.

Each batten end fitting is attached to a slider with a triaxial joint to ensure that the batten can freely orient itself under all points of sail. At least one simple slider should be attached to the sail with nylon webbing between two battens. A headboard is attached to the sail with webbing and is secured to the slider (double) with a clevis pin which allows the headboard to pivot and to be removed.



Self-captive bearings: it's impossible for the bearings in the slider to come out, so it's possible to take off the sliders from the track.



TRACK	SYSTEM	FOR BOATS UP TO	PAGE
FB 24	60	50'	152
	90	60'	153
	120	70'	154
FB 29	190	100'	155

FB24.60 system

HS24 Track

60 mm sliders

For 50 ft boats


Mod. FB24.60D

HEADBOARD SLIDERS

Length = 160 mm

Weight = 0.30 kg

SWL = 1600 kg (horizontal)



Track and accessories
on page 158

Mod. FB24.60S

SIMPLE SLIDER

Length = 60 mm

Weight = 0.12 kg

SWL = 800 kg (horizontal)

25 mm webbing

Mod. FB24.60J

SLIDER WITH JOINT

Length = 60 mm

Weight = 0.16 kg

SWL = 800 kg (horizontal)

10 MA Threaded Pin

Mod. HS24.54

HEADBOARD 40°

Height = 136 mm

Width = 147 mm

Weight = 0.19 kg

SWL = 2000 kg (vertical)

25 mm webbing

Mod. HS24.56

HEADBOARD 60°

Height = 136 mm

Width = 182 mm

Weight = 0.25 kg

SWL = 2000 kg (vertical)

25 mm webbing

Mod. HS24.59

HEADBOARD 90°

Height = 146 mm

Width = 120 mm

Weight = 0.18 kg

SWL = 2000 kg (vertical)

25 mm webbing

Mod. 609.321

SBR RECEPTACLE

on page 164

FB24.90 system

HS24 Track

90 mm sliders

For 60 ft boats


Mod. FB24.90D

HEADBOARD SLIDERS

Length = 240 mm

Weight = 0.50 kg

SWL = 2600 kg (horizontal)



Mod. FB24.60S

SIMPLE SLIDER

Length = 60 mm

Weight = 0.12 kg

SWL = 800 kg (horizontal)

18 mm webbing

Mod. FB24.90J

SLIDER WITH JOINT

Length = 90 mm

Weight = 0.24 kg

SWL = 1300 kg (horizontal)

12 MA Threaded Pin

Mod. FB24.121

SLIDER OUTHAUL

Length = 120 mm

Weight = 0.24 kg

SWL = 1600 kg (horizontal)

2 x 18 mm webbing

Mod. HS24.64

HEADBOARD 40°

Height = 182 mm

Width = 193 mm

Weight = 0.43 kg

SWL = 3500 kg (vertical)

35 mm webbing

Mod. HS24.66

HEADBOARD 60°

Height = 182 mm

Width = 240 mm

Weight = 0.54 kg

SWL = 3500 kg (vertical)

35 mm webbing

Mod. HS24.69

HEADBOARD 90°

Height = 180 mm

Width = 142 mm

Weight = 0.38 kg

SWL = 3500 kg (vertical)

35 mm webbing

Mod. 609.323

SBR RECEPTACLE

on page 165

Mod. FB24.120JA

ASYMMETRIC SLIDER WITH JOINT

For inclined battens of Top-Square sails

Length = 120 mm

Weight = 0.40 kg

SWL = 1400 kg

10 MA Threaded Pin

FB24.120 system

HS24 Track 120 mm sliders For 70 ft boats


Mod. FB24.120D

HEADBOARD SLIDERS

Length = 340 mm

Weight = 0.90 kg

SWL = 3200 kg (Horizontal)



Mod. FB24.60S

SIMPLE SLIDER

Length = 60 mm

Weight = 0.12 kg

SWL = 800 kg (Horizontal)

18 mm webbing

Mod. FB24.120J

SLIDER WITH JOINT

Length = 120 mm

Weight = 0.36 kg

SWL = 1600 kg (Horizontal)

14 MA Threaded Pin

Mod. FB24.121

SLIDER OUTHAUL

Length = 120 mm

Weight = 0.24 kg

SWL = 1600 kg (Horizontal)

2 x 18 mm webbing

Mod. HS24.74

HEADBOARD 40°

Height = 281 mm

Width = 279 mm

Weight = 1.06 kg

SWL = 5000 kg (vertical)

40 mm webbing

Mod. HS24.76

HEADBOARD 60°

Height = 281 mm

Width = 359 mm

Weight = 1.18 kg

SWL = 5000 kg (vertical)

40 mm webbing

Mod. HS24.79

HEADBOARD 90°

Height = 225 mm

Width = 180 mm

Weight = 0.71 kg

SWL = 5000 kg (vertical)

40 mm webbing

Mod. 609.325

SBR RECEPTACLE

on page 165

FB29.190 system

FB29 Track 190 mm sliders For 100 ft boats


Mod. FB29.190D

HEADBOARD SLIDERS

Length = 390 mm

Weight = 2.09 kg

SWL = 6000 kg (Horizontal)



Mod. FB29.90S

Mod. FB29.190J

SLIDER WITH JOINT

Top batten

Length = 190 mm

Weight = 1.10 kg

SWL = 3000 kg (Horizontal)

16 MA Threaded Pin

Mod. FB29.90S

SIMPLE SLIDER

Length = 90 mm

Weight = 0.31 kg

SWL = 1600 kg (Horizontal)

25 mm webbing

Mod. FB29.150J

SLIDER WITH JOINT

Lower battens

Length = 150 mm

Weight = 0.88 kg

SWL = 2200 kg (Horizontal)

14 MA Threaded Pin

Mod. FB29.191

SLIDER OUTHAUL

Length = 190 mm

Weight = 0.65 kg

SWL = 3000 kg (Horizontal)

2 x 25 mm webbing

Mod. HS30.74

HEADBOARD 40°

Height = 281 mm

Width = 279 mm

Weight = 1.30 kg

SWL = 6200 kg (vertical)

40 mm webbing

Mod. HS30.76

HEADBOARD 60°

Height = 281 mm

Width = 359 mm

Weight = 1.47 kg

SWL = 6200 kg (vertical)

40 mm webbing

Mod. HS30.79

HEADBOARD 90°

Height = 225 mm

Width = 180 mm

Weight = 0.88 kg

SWL = 6200 kg (vertical)

40 mm webbing

Mod. 609.326

SBR RECEPTACLE

on page 165



HS22 track

HS22 track is made for systems:
HS22.40, HS22.40/R (page 143),
HS22.50/R (page 144) and
HS22.60/R (page 145).

Mod. HS22.13 END FITTING


Made in plastic; should be attached to the mast with 2 X 5 mm screws.

Mod. HS22.12 JOINT

In order to ensure proper alignment the sections of the track can be jointed together with a nylon fitting; track joint is supplied with 2 screws.

SLUGS


7 standard models for round or flat grooves are available; custom slugs are made on request; the slugs are provided in kits of 17 pieces (17 slugs and 17 screws); each kit includes enough parts to attach 2 m of track with 120 mm hole spacing. Screws should always be fixed using Loctite 222.



SLUGS - ROUND GROOVE

MODEL	T mm	D mm	H mm
HS22.04R	3.9	8.7	2.0
HS22.05R	4.7	9.5	2.0

5 x Ø10 mm screws



SLUGS - FLAT GROOVE


MODEL	T mm	D mm	H mm
HS22.05F	4.7	18.0	4.6
HS22.08F	7.8	20.0	4.6
HS22.10F	9.8	20.0	2.0
HS22.12F	11.8	22.0	3.0
HS22.14F	13.6	24.0	3.0

5 x Ø10 mm screws

Mod. HS22.15 INSTALLATION TOOL

It is necessary to position the slugs with the mast in vertical position (with track mod. HS22.221 and HS22.222).

For boats up to 40 ft and
racing boats from 40 to 60 ft

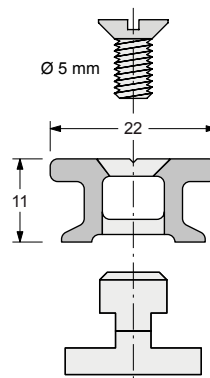

TRACK

The TRACK is an aluminium extrusion hard black anodized and teflon coated. Weight = 0.34 kg/m

MODEL	HOLE SPACING	LENGTH
-------	-----------------	--------

DIRECT MOUNTING

HS22.311	120 mm	3 m
HS22.312	60 mm	

SLUG MOUNTING VERTICAL MAST

HS22.221	120 mm	2 m
HS22.222	60 mm	

SLUG MOUNTING HORIZONTAL MAST

HS22.321	120 mm	3 m
HS22.322	60 mm	


Direct mounting requires drilling and tapping holes in the mast, slug mounting does not.

120 mm hole spacing for 40-50 ft boats,
60 mm hole spacing for 50-60 ft boats.

Mod. HS22.11 LOADER

It allows the cars to be loaded and unloaded easily; the loader includes a stop pin which provides 2 positions: open and closed.

Fixing = 2 X 5 screws L = 176 mm
Weight = 0.10 kg



The HS22 is also available in the glued version, which is particularly suitable for carbon masts. Tracks and accessories on the following pages.

HS22.carbon track


For racing boats
from 40 to 60 ft

Mod. HS22.03 **END FITTING**

Made in plastic; should be attached to the mast with 2 X 5 mm screws.


Mod. HS22.05 **SIDE PLATES**

Fixing can be improved, on most loaded zones (mast head and reefing positions), with 2 aluminium side plates screwed to the mast.

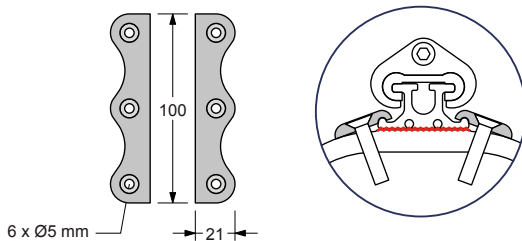

Mod. HS22.02 **TRACK JOINT**

Connection of different sections will be done with 2 s.steel pins.




Mod. HS22.01 **LOADER**

It allows the cars to be loaded and unloaded easily; the loader includes a stop pin which provides 2 positions: open and closed.
L = 500 mm Weight = 0.30 kg

GLUED TRACKS

Wide base profiles for secure strong gluing, particularly suitable for carbon masts. Use for gluing "SP SYstem Spabond 345" or similar.

These tracks always have bolt-rope groove.




Mod. HS22.330

TRACK FOR CARBON FIBER MAST

Aluminium profile hard black anodized and teflon coated. Weight = 0.56 kg/m
It's available in 3 m sections.

FIXING

The track will be glued to the mast (SP SYSTEM - SPABOND 345). For an easier gluing each track is fixed with 3 positioning screws.



HS24/FB24 track

HS24 or FB24 track is made for HS guide systems:

HS24.50 (page 146), HS24.60 (page 147) and HS24.70 (page 148)

and for Fibreball systems :


FB24.60 (page 152), FB24.90 (page 153) and FB24.120 (page 154).

Mod. HS24.13 END FITTING

Made in plastic; should be attached to the mast with 2 X 6 mm screws.

SLUGS


8 standard models for round or flat grooves are available; custom slugs are made on request; the slugs are provided in kits of 20 pieces (20 slugs and 20 screws); each kit includes enough parts to attach 2 m of track with 100 mm hole spacing. Screws will always be fixed using Loctite 222.



SLUGS - ROUND GROOVE

MODEL	T mm	D mm	H mm
HS24.04R	3.7	9.7	2.5
HS24.06R	5.7	11.5	2.5

Ø6 x 14 mm screws



SLUGS - FLAT GROOVE

MODEL	T mm	D mm	H mm
HS24.05F	4.8	19.0	4.8
HS24.06F	5.8	19.0	5.8
HS24.08F	7.8	19.0	6.7
HS24.10F	9.6	24.0	6.7
HS24.12F	11.8	22.0	- - -
HS24.14F	13.6	24.0	- - -

Ø6 mm screws


Mod. HS24.15 INSTALLATION TOOL

It is necessary to position the slugs with the mast in vertical position; with tracks mod. HS24.221 and HS24.222.

Mod. HS24.12 JOINT

In order to ensure proper alignment the sections of the track can be jointed together with a nylon fitting; track joint is supplied with 2 screws.

For 50 - 60 - 70 ft boats

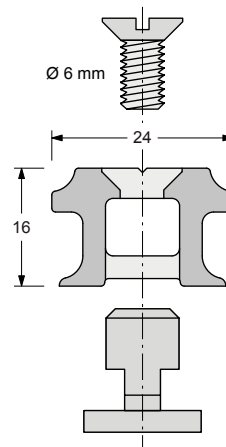

TRACK

Aluminium profile hard black anodized and teflon coated. Weight = 0.55 kg/m

MODEL	HOLE SPACING	LENGTH
-------	-----------------	--------

DIRECT MOUNTING

HS24.311	100 mm	3 m
HS24.312	50 mm	

SLUG MOUNTING VERTICAL MAST

HS24.221	100 mm	2 m
HS24.222	50 mm	

SLUG MOUNTING HORIZONTAL MAST

HS24.321	100 mm	3 m
HS24.322	50 mm	

Direct mounting requires drilling and tapping holes in the mast; track will be screwed to the mast; lengths of 3 m available.

100 mm hole spacing for 50-60 ft boats, 50 mm hole spacing for 60-70 ft boats.

Mod. HS24.11 LOADER

It allows the cars to be loaded and unloaded easily; the loader includes a stop pin which provides two positions: opened and closed.

Fixing = 2 x Ø6 mm screws

L = 240 mm Weight = 0.19 kg

HS30 track

For 80 - 90 - 100 ft boats

The HS30 track is made for HS guide systems:
HS30.90 (page 149) and HS30.130 (page 150)

Mod. HS30.13 **END FITTING**

Made in aluminium, should be attached to the mast with the 2 x 6 mm screws.

Mod. HS30.12 **JOINT**


In order to ensure proper alignment the sections of the track can be joined together with an aluminium fitting; track joint is supplied with 2 screws.

Mod. HS30.11 **LOADER**

It allows the cars to be loaded and unloaded easily; the loader includes a stop pin which provides two positions: opened and closed.

Fixing: 2 screws X 6 mm.

L = 210 mm Weight = 0.20 kg



Mod. HS30.313 **TRACK**

The extremely light (500 gr/m) hard black anodized and teflon coated aluminium profile is very small (only 13x30 mm). It is fixed directly to the mast with 6 mm screws every 50 or 25 mm (without inserts) and is available in 3 m sections.


Weight = 0.50 kg/m

Mod. HS30.313/R **TRACK RACE**

As above with lightening holes.

Weight = 0.46 kg/m

HS30 BOLTROPE TRACK FOR CARBON FIBER MAST

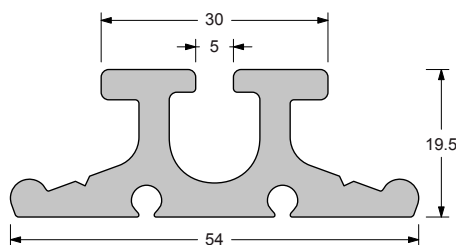

Mod. HS30.330


TRACK FOR CARBON FIBER MAST

Aluminium profile hard black anodized and teflon coated. Weight = 1.10 kg/m

It's available in 3 m sections.

FIXING

The track will be glued to the mast (SP SYSTEM - SPABOND 345). For an easier gluing each track is fixed with 3 positioning screws.




Mod. HS30.03 **END FITTING**

Made in aluminium; should be attached to the mast with 3 x 6 mm screws.


Mod. HS30.05 **SIDE PLATES**

Fixing can be improved, on most loaded zones (mast head and reefing positions), with 2 alu side plates screwed to the mast



Mod. HS30.02 **JOINT**

Connection of different sections will be done with 2 s. steel pins.



Mod. HS30.01 **LOADER**

It allows the cars to be easily loaded and unloaded.

L = 990 mm Weight = 1.20 kg

FB29 track

For boats
from 80 to 100 ft



The FB29 track is made for Fibreball system FB29.190 on page 155.

Mod. FB29.13 **END FITTING**

Made in aluminium, should be attached to the mast with the 2 X 8 mm screws.

Mod. FB29.12 **JOINT**


In order to ensure proper alignment the section of the track will be joined together with this nylon fitting: it is supplied with 2 screws.

SLUGS

Available on request, for 8 mm screws.

Mod. FB29.15 **INSTALLATION TOOL**

It is necessary to position the slugs with the mast in vertical position; with tracks mod. FB29.221.

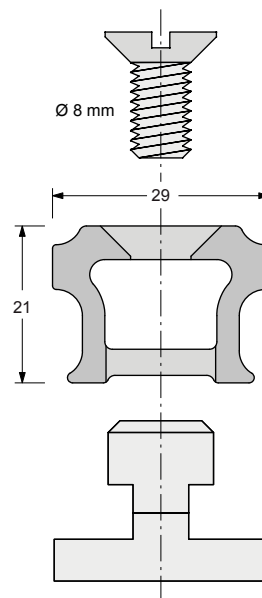

TRACK

Aluminium profile hard black anodized and teflon coated. Weight = 0.72 kg/m

MODEL	HOLE SPACING	LENGTH
-------	--------------	--------

DIRECT MOUNTING

FB29.311	100 mm	3 m
----------	--------	-----

SLUG MOUNTING VERTICAL MAST

FB29.221	100 mm	2 m
----------	--------	-----

SLUG MOUNTING HORIZONTAL MAST

FB29.321	100 mm	3 m
----------	--------	-----

Direct mounting requires drilling and tapping holes in the mast, slug mounting does not.

Mod. FB29.11 **LOADER**

It allows the cars to be easily loaded and unloaded.

Fixing = 2 x Ø8 mm screws.

L = 300 mm Weight = 0.24kg



special products




Arya 415 - Duvetica

FAST-RELEASE HR PUSH-PINS

Are available for the main headboard connection to the head carriage.

Made in HR s.steel to offer the highest loads, with a security-line and an easy grip for a quick coupling and release.



	MODEL	D mm	L mm	SWL kg	CARRIAGE CODE
	P10.20	10	20	1600	HS22.50D/R - HS24.50D - FB24.60D
	P14.25	14	25	5000	HS22.60T/R - HS24.60T - FB24.90D HS24.70Q - FB24.120D
	P14.35	14	35	5000	HS30.70Q - HS30.90Q - FB29.190D



FEEDER CARRIAGE

Mounted on the bolt-rope tracks to bend the mainsail inside the bolt-rope-groove. It can be easily removed to fit the mainsail with sliders.

Mod. HS22.09 for HS22.330 track (on page 157)

Mod. HS30.09 for HS30.330 track (on page 159)



GATE

A stretch of mobile track is placed above the lowered mainsails. When the gate is removed, the head carriage and top batten slider of a square-top mainsails can be extracted to make it easier to “tie” the mainsail to the boom.

Mod. HS22.16 L=204 mm - for HS22 track (on page 156)

Mod. HS22.06 L=204 mm - for HS22.330 track (on page 157)

Mod. HS24.16 L=264 mm - for HS24 track (on page 158)

Mod. HS30.16 L=264 mm - for HS30 track (on page 159)



MINI HOOK (For boats up to 40 ft)

It's a head carriage with automatic hook which hooks onto special stops (**Mod. HS22.17**) on the mast track to unload the halyard.

Two manoeuvres from the mini hook go down along the sail

1 - to disengage the hook and the carriage is free to lower

2 - to load the hook, which hooks onto the first stop on the track

Weight = 0.42 kg Length = 160 mm **SWL = 1400 kg**

Mod. HS22.161 For HS22 track (on page 156)



2:1 MINI HEADBOARD SLIDER FOR HS22 TRACK

This model, designed for class 40ft, is fitted with a 40 mm high load sheave for a 2:1 halyard; the mainsail head will be simply tied to the slider with a line.

Weight = 0.45 kg Length = 185 mm **SWL = 2000 kg**

Mod. HS22.185 For HS22 track (on page 156)



DOUBLE HEAD SLIDER FOR RING CONNECTION

Two 90 mm long sliders with a bracket will be connected to the ring on the head of the mainsail.

Weight = 0.87 kg Length = 240 mm **SWL = 3200 kg**

Mod. HS24.90/DY For HS24 track (on page 158)

Mod. HS30.90/DY For HS30 track (on page 159)



DOUBLE HEAD SLIDER WITH SOFT-LINK

Two 90 mm long sliders with a bracket will be tied to the ring on the head of the mainsail.

Weight = 0.65 kg Length = 240 mm **SWL = 3200 kg**

Mod. HS24.90/DX For HS24 track (on page 158)

Mod. HS30.90/DX For HS30 track (on page 159)

batten receptacles



SBR SYMMETRIC BATTEN RECEPTACLE ROUND BATTENS

The SBR is different from standard batten receptacles in that it fits inside the batten pocket, making it invisible on the outside except for the small fastening plate - thereby almost completely eliminating chafe on the mast and rigging.

Moreover the batten will be not on one side, but perfectly "in the middle"





Each SBR includes:

1. the main body;
2. side plates to fix the receptacle to the sail;
3. trimming screw for batten compression;
4. the cap with a threaded hole to screw the receptacle in the toggle of the batten slider.

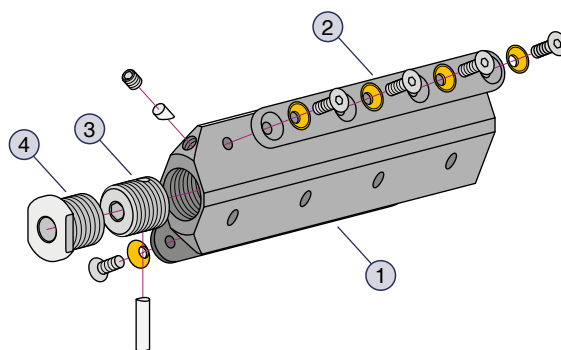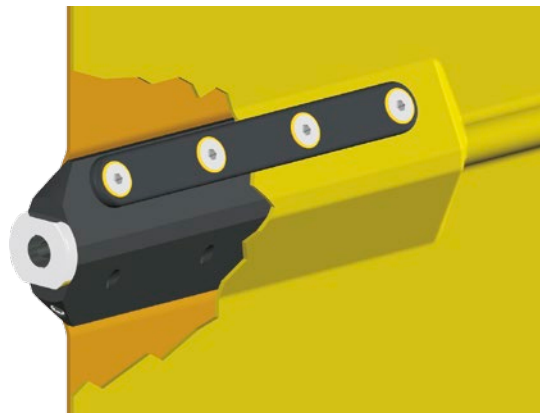


RESIN SBR FOR ROUND AND FLAT BATTENS

Completely made of high-strength, 50% glass fiber resin, max UV resistance, with self-tapping screws to offer a very fast and easy mounting. For boats up to 40 ft.

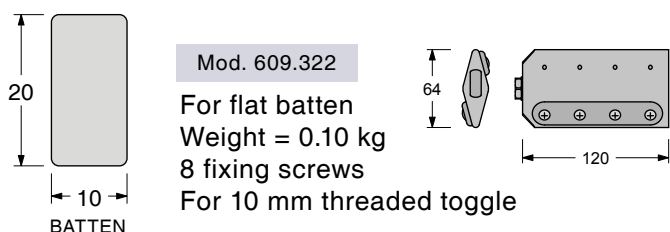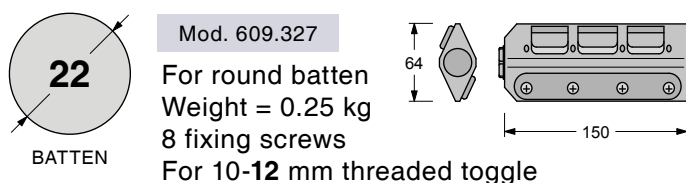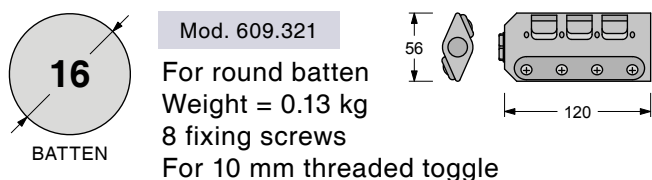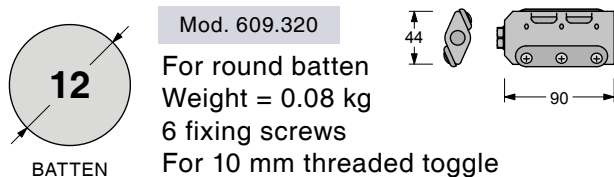


These resin made receptacles are very light, for this reason they can be used also on the leech side.

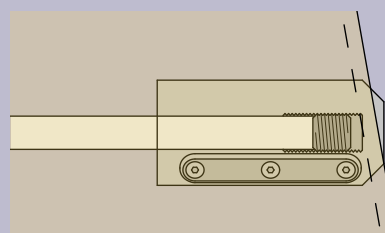



ALUMINIUM SBR FOR ROUND BATTENS

Main body and side plates are aluminium made with 6 mm A316 screws, the s.steel A316 cap for the batten car toggle connection is available with different threads. These SBR receptacles are suitable for boats up to 100 ft.





Mod. 609.323

For round batten
Weight = 0.45 kg
6 fixing screws
For 10-12 mm threaded toggle





Mod. 609.324

For round batten
Weight = 0.54 kg
8 fixing screws
For 10-12 mm threaded toggle




Mod. 609.325

For round batten
Weight = 0.62 kg
8 fixing screws
For 12-14 mm threaded toggle




Mod. 609.326


For round batten
Weight = 1.05 kg
14 fixing screws
For 14-16 mm threaded toggle

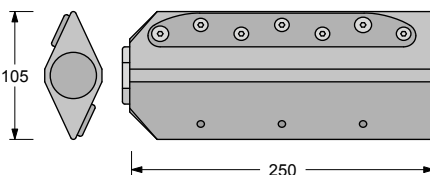

On the same receptacle a number of threads for the connection with the batten slider toggle are available. So it will be necessary to specify not only the receptacle model (from 609.323 to 609.326) but also the thread size: 10, 12, 14 or 16 mm.




SPECIAL TWO BATTENS SBR

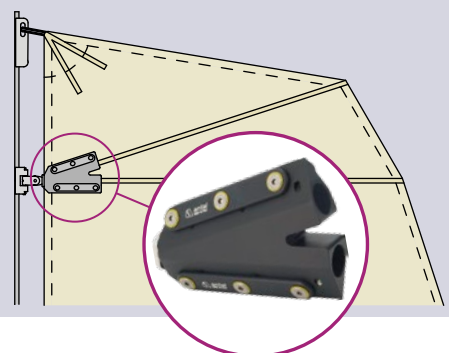



RESIN STANDARD RECEPTACLES FOR ROUND AND FLAT BATTEN

Made of high-strength resin with max UV resistance.
Fixing: 4 screws + 4 self-locking nuts.
Made for Antal system HS22.40.





Mod. 610.341

For round batten
Weight = 0.06 kg
4 fixing screws
For 10 mm threaded toggle



Mod. 610.340

For flat batten
Weight = 0.06 kg
4 fixing screws
For 10 mm threaded toggle

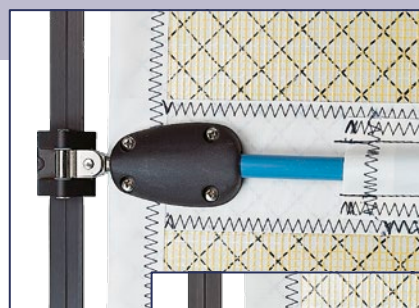



soft links

Dyneema pad-eye 168



T-Lock..... 169



deck rings 170



low friction rings..... 172



solid rings 173




rings & loops..... 174



hook..... 175



snap-loops 176

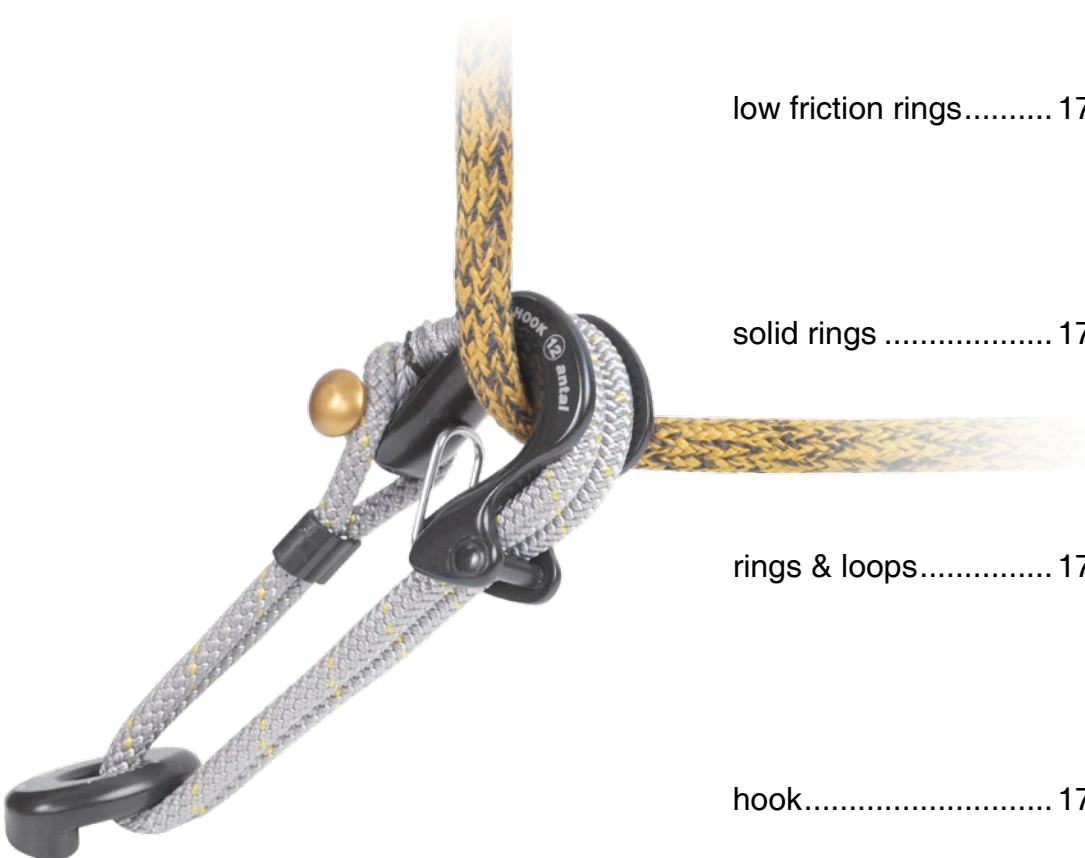

soft links

SOFT LINKS

The use of Dyneema lines, characterized by high stiffness and strength and by excellent smoothness, resulted in the development of new equipment that exalts these properties.

First the fastenings called “soft-links”: Dyneema loops and snap-loops that replace shackles, snap-shackles and other metal connections.

Then the rings, now produced in different versions and many sizes that exploit the excellent sliding of Dyneema lines, replace sheaves and blocks for more and more manoeuvres.

The advantages of this new equipment are: high resistance, increased lightness, a reduction in size and significant cost savings.



mod. LS1120

mod. 7608



DYNEEMA PAD-EYES

Special extremely light, “low profile” pad-eye, designed for Dyneema loop in hard black anodized aluminium. The Dyneema pad-eye is available in two versions:

- 1) with studs from the bottom and a perfectly smooth upper surface;
 - 2) with screws from above.
- Studs or screws, washers and nuts included.

The Study of the Pull Direction

DPE offers great performance on a wide angle. DPE's profile is so low and smooth that it is walkable. This is because we designed this pad-eye starting from its Pull Direction, and not for a simple coupling.

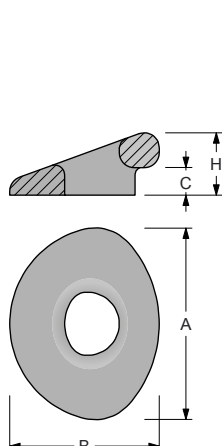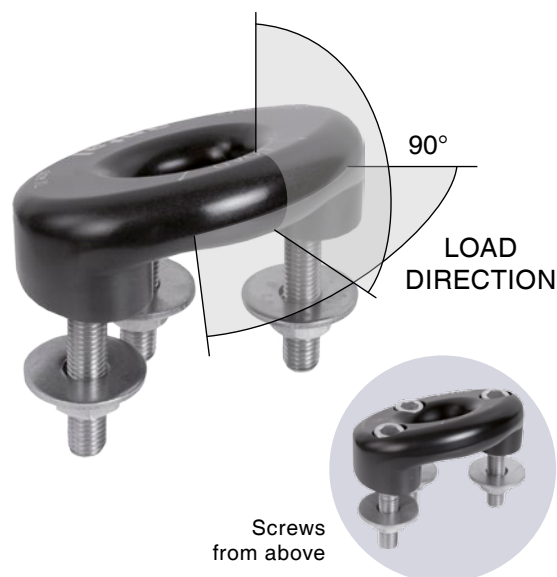

WITH SCREWS

WITH STUDS

MODEL	MODEL	SOFT LINK Ø mm	A mm	B mm	H mm	C mm	SWL kg	WEIGHT* gr	SCREWS N° x Ø mm
7505	7605	5	43	34	16	7	600	22	2 x 6
7506	7606	6	58	45	21	10	1300	50	3 x 6
7508	7608	8	77	60	27	12	2200	90	3 x 8
7510	7610	10	93	74	34	16	3500	180	3 x 10
7512	7612	12	112	89	41	19	5000	370	3 x 12
7514	7614	14	123	97	46	21	6800	520	4 x 12

* without screws-nuts

T-LOCK FOR SWIVELLING & REMOVABLE DECK LOOPS

T-Lock is a flush-mounted deck base to which a loop can be connected.

A special toggle, which automatically locks-in, fits into the base. It cannot be removed under load, but can easily be removed without a load on it. The toggle can be locked-in permanently which makes it non-removable.


The toggle is swivelling, it can take a load in any direction.

When used as a dog-bone it will adapt to any Dyneema loop, such as a simple loop, low friction ring with loop and a snatch block with loop

Two models are available, sizes and characteristics are shown in the table.



mod. TL22.32



MODEL	D mm	MAX DECK H mm	DECK HOLE Ø mm	SWL kg	WEIGHT gr
TL22.32	64	30	44	2200	170
TL28.40	74	35	54	3500	300

TOGGLE mod.	RING mod.
TT22.32	→ R20.14
TT28.40	→ R28.20


- **Dyneema loop and toggle:** this is a multi-ring Dyneema loop with a cover linked to the toggle, it is always included in the T-Lock.

ACCESSORIES

- **Low friction ring:** a ring can be inserted in the Dyneema loop, models in the above table are available on request.

- **Simple toggle:** this is an aluminium dog-bone suitable for splicing your own loop, models in the above table are available on request.

- **Blocks:** Looper blocks (page 72) can be lashed to the toggle and easily locked-in the T-Lock base. This feature is optional.

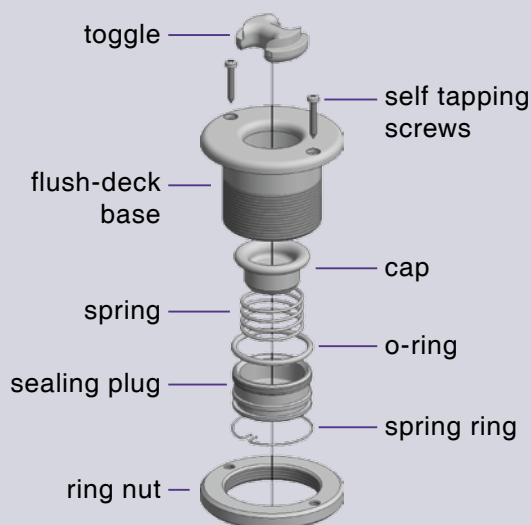

there are two positions for the sealing plug:

- 1) **low position** (unscrewed): in this position it is possible to fit the toggle into the base or to take it off (only if not under load).
- 2) **high position** (screwed): in this position the toggle is permanently locked into the base and it is not possible to take it off.


T-Lock Basis +
Low Friction Ring



deck rings

ALUMINIUM DECK RINGS

Two sizes, highly polished and hard black anodized aluminium deck ring.
Screws not included.




mod. R14.14

mod. R20.20

MODEL	A mm	B mm	C mm	D mm	H mm	SWL kg	WEIGHT gr	SCREWS N° x Ø mm
R14.14	48	18	28	14	29	800	25	2 x 6
R20.20	59	19	38	20	39	800	45	2 x 6

S.STEEL DECK RINGS

Two sizes, highly polished s.steel deck ring.
Screws not included.




mod. R14.14/S

mod. R20.20/S

MODEL	A mm	B mm	C mm	D mm	H mm	SWL kg	WEIGHT gr	SCREWS N° x Ø mm
R14.14/S	48	18	28	14	29	800	74	2 x 6
R20.20/S	59	19	38	20	39	1500	120	2 x 8

DOUBLE LINE DECK RINGS

Two sizes, highly polished and hard black anodized aluminium deck ring.
The wide hole allows the passage of two lines.
Screws not included.



mod. R12.25

mod. R18.36

MODEL	A mm	B mm	C mm	H mm	D x W mm	SWL kg	WEIGHT gr	SCREWS N° x Ø mm
R12.25	59	18	39	27	12 x 25	800	30	2 x 6
R18.36	75	19	54	37	18 x 36	800	56	2 x 6




MULTI RING ORGANIZER

Antal Low-Friction products now include a new organizer: MRO, the Multi-Ring Organizer.

A CNC-machined body in hard black anodized aluminium, polished finely to guarantee minimum friction. MROs are easy-to-install, extremely lightweight, resistant and practical organizers.

Just like Ring by Antal, they simplify the mechanics and provide great performance. MROs are available for 3 to 6 lines, and fit lines up to 12 mm.

Screws not included.



MODEL	HOLES N° x Ø mm	A mm	B mm	H mm	SWL kg	WEIGHT gr	SCREWS N° x Ø mm
R3.14	3 x 14	88	24	29.5	800	98	2 x 8
R4.14	4 x 14	116				132	2 x 8
R5.14	5 x 14	144				165	2 x 8
R6.14	6 x 14	172				196	3 x 8

DEFLECTOR


The Antal "Deflector" is a low friction ring for deck mounting.

One piece aluminium made, polished and hard black anodized.

Screws not included.



mod. D3008



MODEL	MAX LINE Ø mm	A mm	B mm	H mm	SWL kg	WEIGHT gr	SCREWS N° x Ø mm
D3008	8	40	60	14	1500	98	1 x Ø8 + 2 x Ø6
D3610	10	54	75	17	2300	85	1 x Ø10 + 2 x Ø8




Tutima, Germany - Photo by Sven Jürgensen


low friction rings

LOW FRICTION RINGS




Six models with holes from 7 to 38 mm, the simplest idea for maximum load and minimum weight.

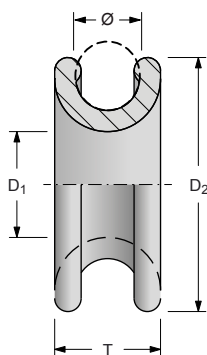

MODEL	D1 mm	D2 mm	Ø mm	T mm	WEIGHT gr	SWL kg
R07.05	7	18	5	9	3	400
R10.07	10	25	7	12	5	800
R14.10	14	35	10	15	12	1600
R20.14	20	50	14	22	44	3200
R28.20	28	70	20	31	120	6400
R38.28	38	99	28	44	338	10000



THE UNIVERSAL SOLUTION

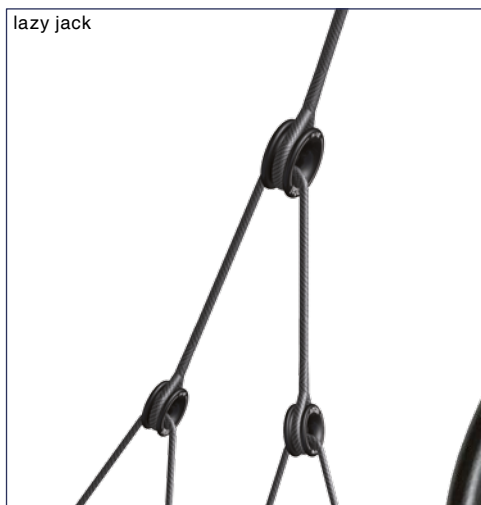

mod.
R07.05



mod.
R10.07



mod.
R14.10

real size



mod.
R20.14



mod.
R28.20



mod.
R38.28

solid rings

SOLID RINGS

Four models with holes from 30 to 50 mm, the simplest idea for maximum load and minimum weight.


What's good about it

Compared with Antal Ring, Solid Ring has a thinner body and a wider hole with the same extreme working loads. The outer groove is suitable for a hanging line.

Material and Finishing

Minimum friction, highly polished, hard black anodized aluminium body.

Solid ring has been specifically designed for reefing and for 3D setting of the genoa sheet.



MODEL	D1 mm	D2 mm	T mm	WEIGHT gr	SWL kg
R30.56	30	56	16	62	1800
R34.64	34	64	18	89	2800
R40.76	40	76	22	154	4400
R50.94	50	94	25	266	6500

Solid ring has been specifically designed for reefing and for 3D setting of the genoa sheet.



Reefing




3D genoa adjusting

rings & loops

RINGS & LOOPS

The Antal low friction rings are available also with a dyneema loop for a fast and easy connection.

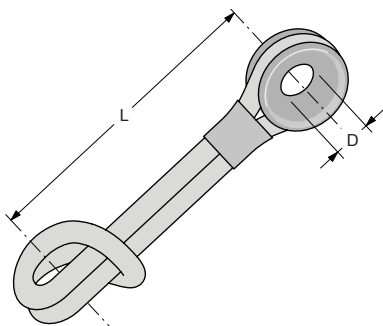

mod. RL6.0

MODEL	D mm	L mm	SWL kg	LOOP Ø mm	RING model
RL3.0	7	60	240	3	R07.05
RL4.0	10	70	400	4	R10.07
RL4.5	10	80	700	4.5	R10.07
RL5.0	14	90	900	5	R14.10
RL6.0	14	110	1500	6	R14.10
RL6.1	20	130	1500	6	R20.14

Breaking load values have been obtained through tests on new Dyneema loops, the safe working load is obtained from the breaking load with a safety factor = 3 to consider the wear and tear of the dyneema lines.



ABC Marine - 39 Trimaran - Design Dick Newick

HOOK

It can be easily “hooked” to a genoa or a spinnaker sheet: the lightest and strongest solution for a line control.


Aluminium made, highly polished and hard black anodized with a spliced Dyneema Snap Loop. A safety spring prevents the line from going out. Spare Dyneema Loops are available.

Antal offers a special aluminium pad-eye (page 168) for Dyneema Loops.

Dyneema Loop safety factor (breaking load / safe working load) = 3.



mod. HK12

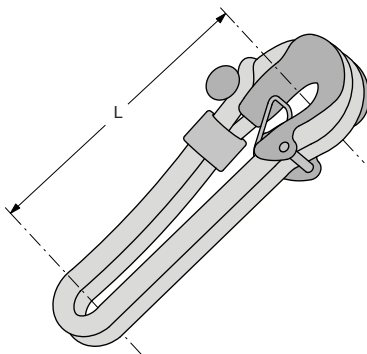


MODEL	MAX LINE Ø mm	L mm	SWL kg	WEIGHT gr
HK12	12	110	1500	80
HK16	16	120	2200	130



mini snap loops

MINI SNAP LOOP

It's a Dyneema loop that can be opened, with an easy and safe lock system. Two sizes with 4 or 5 mm lines with different lengths. It will be used as a single, double or triple ring.

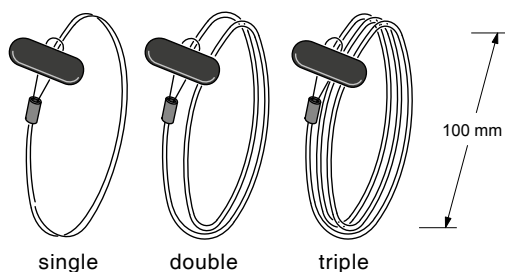

MODEL	Ø mm	TOTAL LENGHT cm	FOR	SWL kg
SL4S	4	30	SINGLE	600
SL4D		50	DOUBLE	1200
SL4T		70	TRIPLE	1800
SL5S	5	30	SINGLE	1000
SL5D		50	DOUBLE	2000
SL5T		70	TRIPLE	3000




Class 40 Eco - M. Miceli

snap loops

SNAP LOOPS WITHOUT COVER

These snap loops are obtained with a spliced Dyneema line without a cover and an aluminium dog-bone.
Suitable for Looper blocks (page 72).



DYNEEMA WITHOUT COVER

MODEL	DYNEEMA Ø mm	BL kg	SWL kg	L mm	WEIGHT gr
LS2060	4	3000	1000	100	11
LS2070	5	5200	1600	110	20
LS2080	6	6600	2200	125	44
LS2100	8	11000	3500	160	81




mod. LS2070

The Safe Working Load SWL is 1/3 of the breaking load, obtained from traction tests on a new Loop.

SNAP LOOPS WITH COVER

These snap loops are obtained with a spliced Dyneema line with a polyester cover, an aluminium dog-bone and a locking sleeve.
Suitable for Snatch Looper blocks (page 93).



DYNEEMA WITH POLYESTER COVER


MODEL	DYNEEMA Ø mm	BL kg	SWL kg	L mm	WEIGHT gr
LS2061	5	2800	900	110	15
LS2071	6	4800	1600	125	27
LS2081	8	6700	2200	150	51
LS2101	10	10500	3500	200	90



mod. LS2071

DOG-BONE

You can prepare your special snap loop using Antal aluminium dog-bones, available separately.



MODEL	FOR DYNEEMA Ø mm	Ø mm	L mm	WEIGHT gr
LS2062	4	6.5	30	3
LS2072	5	8.0	37	6
LS2082	6	10.0	46	13
LS2102	8	11.5	55	22
LS2122	10	13.5	67	36
LS2142	12	16.0	79	55





accessories

cleats 180



shackle & pad-eyes 182



promotional items 184



model index 192

roller cleat




mod. RC290/SI

mod. RC290/B



1.



2.



3.



4.

Roller is a folding cleat with rotating horns: with a simple gesture of your hand, you can open or close roller even with the line on, just by turning one of the horns.

Roller is **open**: you can easily tie or remove the mooring line.

Roller is **closed**: this position minimizes the size and, more important, prevents other lines from getting caught.


The horns can be shut down or turned up even under load. Roller is the only folding cleat you can close with the line on.

Roller has perfectly rounded shapes in order not to damage the mooring lines.

Available in 4 sizes and 2 finishes: silver (/SI) or black anodized (/B).

Horn rotation

The horn can only be rotated on one side (inward). In this way, Roller can act as a footrest (outward rotation is locked).




A safety ball keeps the cleat steady in the open or closed position.



Safe Working Load

The SWL may differ according to the pull direction, depending on the type of mooring line used.

Mooring knot: the max. load changes with the line direction.



Spliced line: the max. load remains the same for any line direction.

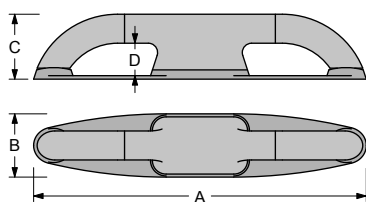

MODEL	A mm	B mm	C mm	D mm	SWL kg	WEIGHT kg	SCREWS N° x Ø mm	MAX LOA ft
RC230*	232	46	46	21	2000	0.44	2 x Ø10 + 2 x Ø6	36
RC290*	287	55	56	28	4000	0.77	2 x Ø14 + 2 x Ø6	46
RC350*	346	64	65	31	7500	1.33	4 x Ø12 + 2 x Ø6	58
RC420*	418	76	77	36	11500	2.30	4 x Ø14 + 2 x Ø8	70

* For black finishing add /B to the model number, add /SI for the silver.

track adjustable cleat


TRACK ADJUSTABLE CLEAT

Two moveable cleats for either 32 mm or 40 mm T-track.

Cleats and slider are CNC machined from hard black anodized aluminum, low profile design.

Single screw-in stop pin keeps the cleat firmly locked in any position along the track, or locked open for easy of movement.

Nylon insert on the slider for easier movement.
S.steel version available.




MODEL	T TRACK mm	PIN Ø mm	A mm	B mm	H mm	L mm	WEIGHT gr
622.412	32x6	11	170	49	55	132	0.45
623.412	40x8	14	200	60	67	160	0.78



Trimarine Compositos - IRC 40 - Juobert Nivelt

CLASSIC CLEATS

This cleat is a classical look cleat formed by a teak beam and a double s.steel basis.
Teak Cleat is available in two sizes.

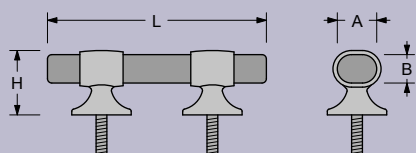


MODEL	A mm	B mm	H mm	L mm	SCREWS Ø mm
7412	36	26	60	320	10
7413	48	31	73	400	16

shackles & pad-eyes

SHACKLES AISI 316 & HR

Antal supplies standard shackles made in AISI 316 and HR high resistance s.steel. The HR version offers higher values of the Safe Working Load.



SHACKLES AISI 316

MODEL	D mm	SWL kg	ANTAL BLOCKS Ø mm
005SS	5	600	50
006SS	6	800	60
008SS	8	1300	- - -
010SS	10	1900	- - -
012SS	12	2600	- - -
014SS	14	3500	- - -
016SS	16	4400	- - -

SHACKLES HR


MODEL	D mm	SWL kg	ANTAL BLOCKS Ø mm
- - -	- - -	- - -	- - -
006HR	6	1300	70
008HR	8	2200	80
010HR	10	3500	100
012HR	12	5000	120
014HR	14	7000	140 - 150
016HR	16	9000	180



Fora Marine RM 890

“U” BOLTS

Made of AISI 316 stainless steel. They can be fitted with a block and a “stand-up” spring.

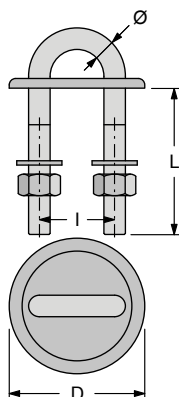


MODEL	7105	7106	7108	7110
Ø mm	5	6	8	10
I mm	17	22	28	35
D mm	38	44	54	63
L mm	50	55	67	67
WEIGHT kg	0.05	0.06	0.13	0.17
SWL kg	500	800	1500	2500
BLOCK Ø mm	50	60	70	80



"4 SCREWS" PAD-EYES

These models, made in AISI 316 s. steel, are fixed to the deck with 4/6 screws that guarantee the best distribution of the load, making them the right solution for heavy loads. They can be fitted with a block and a "stand-up" spring.



MODEL	7206	7208	7210	7212	7214	7216	7220
Ø mm	6	8	10	12	14	16	20
D ₁ mm	44	65	75	80	99	110	129
D ₂ mm	32	49	53	59	74	84	104
SCREWS N° x Ø mm	2 x Ø6	4 x Ø6	4 x Ø8	4 x Ø8	4 x Ø10	6 x Ø10	6 x Ø10
WEIGHT kg	0.10	0.16	0.26	0.38	0.68	1.10	1.80
SWL kg	800	1500	2500	3600	4600	6500	9000
BLOCK Ø mm	60	70	80	100	120	140 - 150	180




SCREWED EYEBOLTS


Made of AISI 316 stainless steel.

This solution allows an easy removal of the eyebolt from the deck. They can be fitted with a block and a "stand-up" spring.

Blocks with screwed eyebolts include: block with spring and (removable) eyebolt and the base (fixed to the deck). The same base is suitable for blocks of different sizes: same base for 70 and 80 mm blocks, same for 100 and 120 mm blocks and one for 140, 150 and 180 mm.



MODEL	7306	7308	7310	7312	7314	7316	7320
Ø mm	6	8	10	12	14	16	20
D ₁ mm	12	20	20	24	24	30	30
D ₂ mm	40	50	60	70	78	84	100
D ₃ mm	54	70	80	90	90	120	120
D ₄ mm	32	50	56	64	64	92	92
D ₅ mm	- - -	28	28	30	32	42	42
H mm	- - -	35	35	38	38	56	56
SCREWS N° x Ø mm	2 x Ø6	4 x Ø6	4 x Ø8	4 x Ø10	4 x Ø10	6 x Ø10	6 x Ø10
WEIGHT kg	0.23	0.56	0.58	0.72	1.09	2.20	3.60
SWL kg	800	1500	2500	3600	4600	6500	9000
BLOCK Ø mm	60	70	80	100	120	140 - 150	180

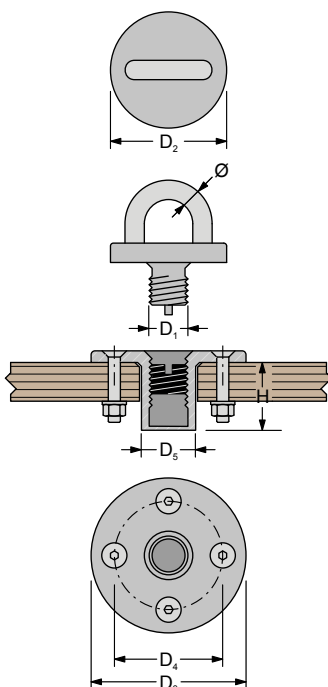

promotional items

RING & CARD

Rings mod. R07.05, R10.07, R14.10 and R20.14 are available with packaging (add /P after the Ring code) and Ring Display Set. Contact Antal for more info.



Mod. R10.07/P

Mod. G206/0

Ring & Card
(Pag. 172)

Ring Display Set
(Ring & Card not included)

DISPLAY FOR SHOPS

5 models available, sizes : 245 x 335 mm.
Blocks, rings and winch handle are included.



Mod. G201B

Mod. G202

Mod. G204

Mod. G205

Mod. G207

ring & loop

**Low friction rings
& Loop**
(Page 174)

snatch

Snatch blocks
(Page 94)

speedylock

Winch handle
(Page 31)

Dyna block

Dynablock
(Page 92)

hook

Hook
(Page 175)

T-SHIRT

Mod. G302

Add /S, /M, /L or /XL for
small, medium, large or extra
large sizes.



WEB SITE




2017 Antal catalogue is available on www.antal.it.
CAD library is available in download section of www.antal.it



FACEBOOK

Follow us on Facebook



CD-ROM

2017 4 languages Antal catalogue and CAD library is available in CD-Rom.



USER'S GUIDE

Winches user's guide and many products exploded view are available on request.



2017 CATALOGUE

Photo: Studio Light
Printing: Centrooffset
Printed in October 2016



CUSTOM

Custom products are designed, produced and tested on request.

Products are continuously improved and Antal reserves the right to modify them without notice. Antal has no responsibility for possible mistakes in this catalogue.

ANTAL is a registered trade-mark.


Vismara V50DS

ant tracks


FULL BATTEN MAST TRACKS

Material & finish: hard black anodized and Teflon-coated aluminium. Silver finish only on request.

For sliders with plastic or HS fibre guides




size 22x11 mm
fasteners: Ø5 mm screws
mounting slugs available
length : 2 or 3 m
page 156




size 22x16 mm
profile to be glued
length: 3 m
page 157


For sliders with HS fibre guides or Fibreball sliders



size 24x16 mm
fasteners: Ø6 mm screws
mounting slugs available
length : 2 or 3 m
page 158




size 24x16 / 4x15 mm
no fasteners
mast groove 4x15 mm
length : 3 m




size 24x16 / 6x25 mm
no fasteners
mast groove 6x25 mm
length : 3 m

For Fibreball sliders




size 29x21 mm
fasteners: Ø8 mm screws
mounting slugs available
length: 3 m
page 160

For sliders with HS fibre guides



size 30x13 mm
fasteners: Ø6 mm screws
no slugs available
length : 3 or 6 m
page 159

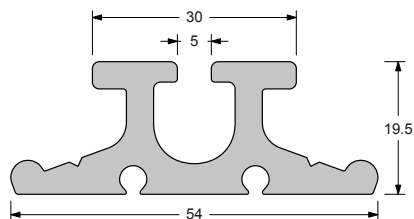

size 30x20 mm
profile to be glued
length: 3 m
page 159




"T" TRACKS


"T" tracks for sliders with plastic guides.

Material & finish: hard black or silver anodized and Teflon-coated aluminium.


Material & finish: polished 316 stainless steel




size 32x6 mm
fasteners: Ø6 mm screws
any length up to 6 m
page 112

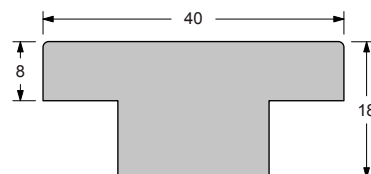


size 40x8 mm
fasteners: Ø8 mm screws
any length up to 6 m
page 112



size 26x4 mm
fasteners: Ø5 mm screws
any length up to 3 m
page 100



size 32x6 mm
fasteners: Ø6 mm screws
any length up to 6 m
page 102

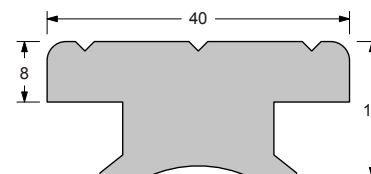


size 40x8 mm
fasteners: Ø8 mm screws
any length up to 6 m
page 104


4RACE TRACKS

4Race tracks for ball bearings sliders.


Material & finish: hard black anodized and Teflon-coated aluminium. Silver finish only on request.




size 27x20 mm
fasteners: Ø6 mm screws
any length up to 6 m
page 117




size 31x21 mm
fasteners: Ø8 mm screws
any length up to 6 m
page 120

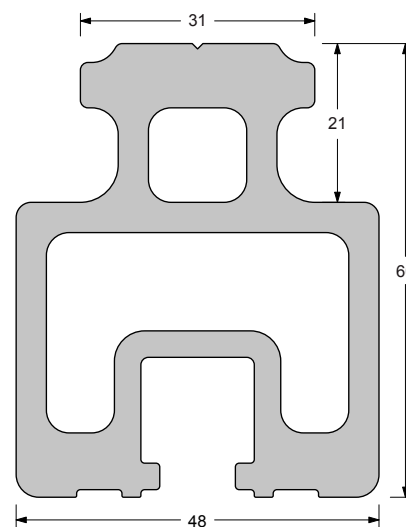

size 31x60 mm
fasteners: Ø8 mm screws on
sliding slugs
any length up to 6 m
page 120

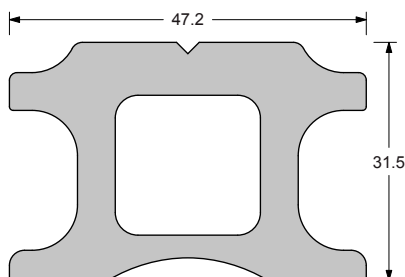

size 47x31.5 mm
fasteners: Ø10 mm screws
any length up to 6 m
page 132

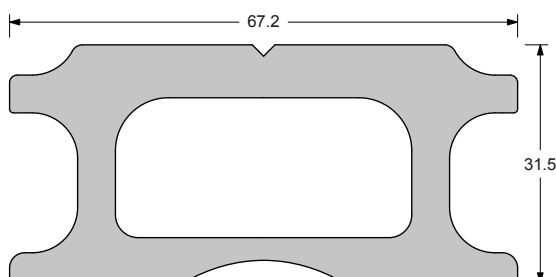


size 67x31.5 mm
fasteners: Ø12 mm screws
any length up to 6 m
page 136

block systems


STANDARD SYSTEMS

TAB. A

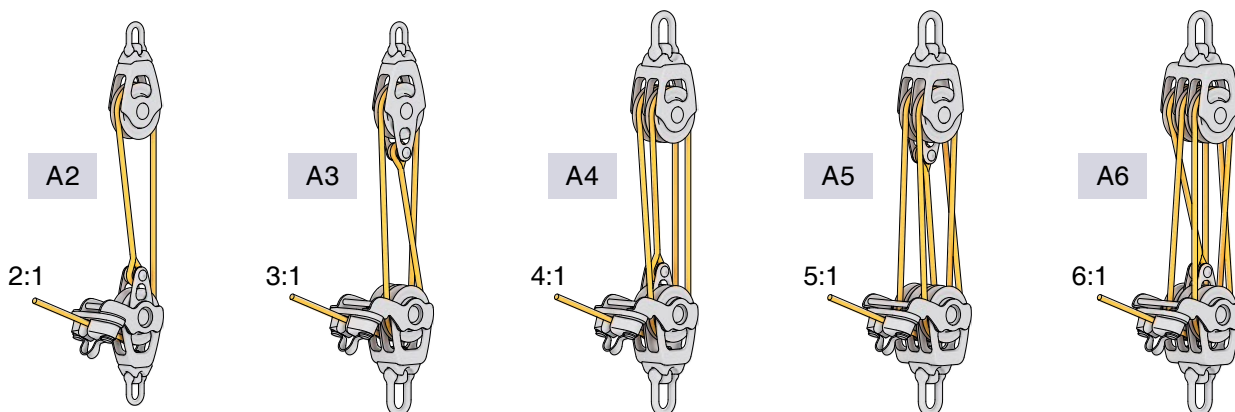


FIDDLE SYSTEMS

TAB. B

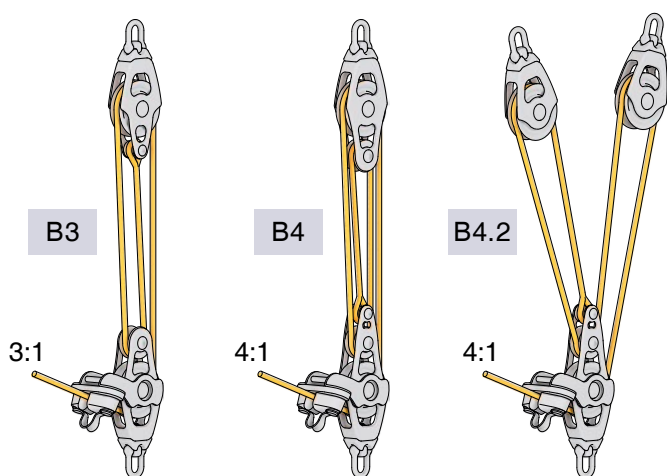


CHAIN SYSTEMS FOR VANG AND BACKSTAY TAB. C

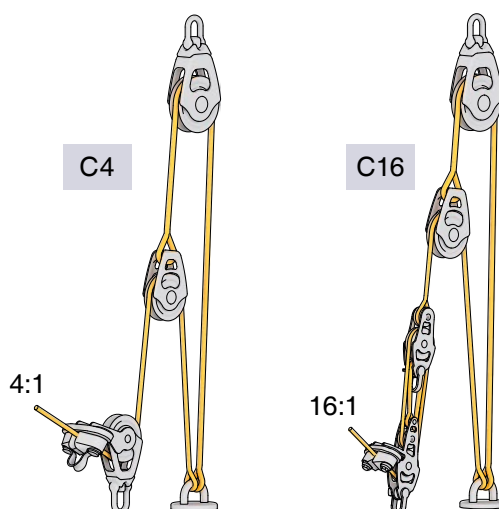

BLOCKS SYSTEM FOR VANG AND BACKSTAY


TAB. D

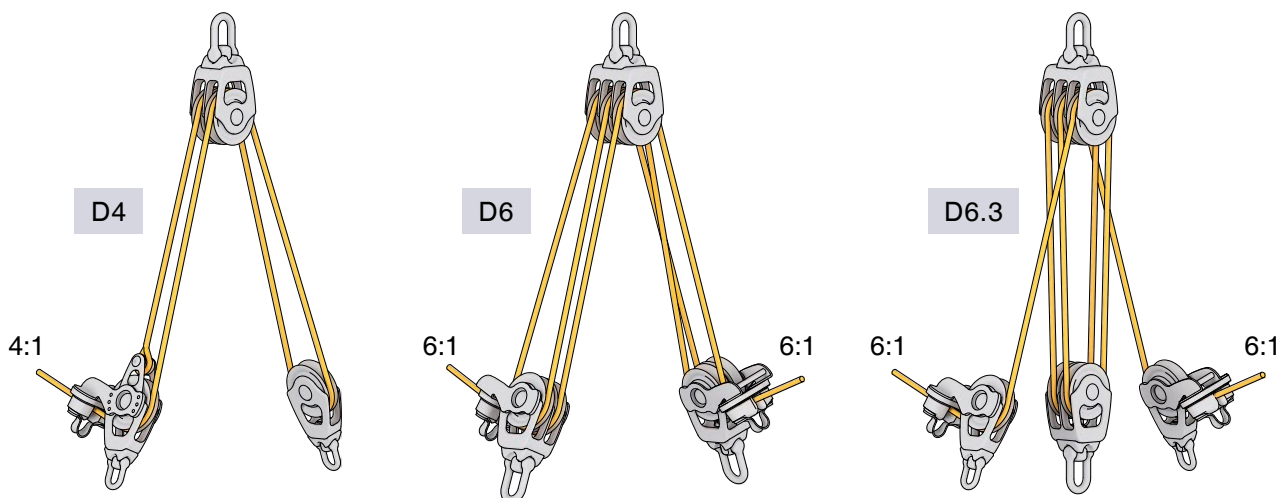


SINGLE SPEED MAIN SHEET SYSTEMS

TAB. E


E6

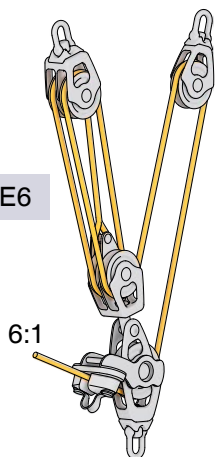


E7

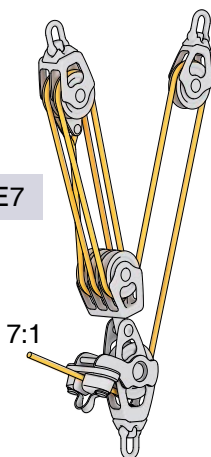

E8

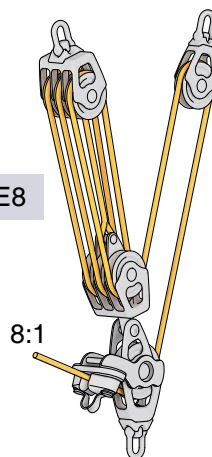


E7.1

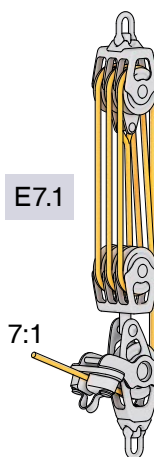


DOUBLE SPEED MAIN SHEET SYSTEMS

TAB. F


F4

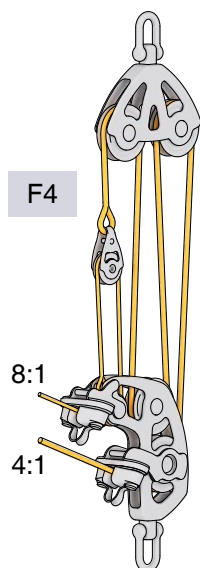

F6

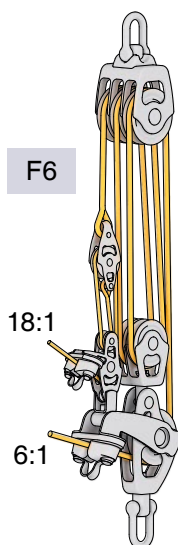


F24

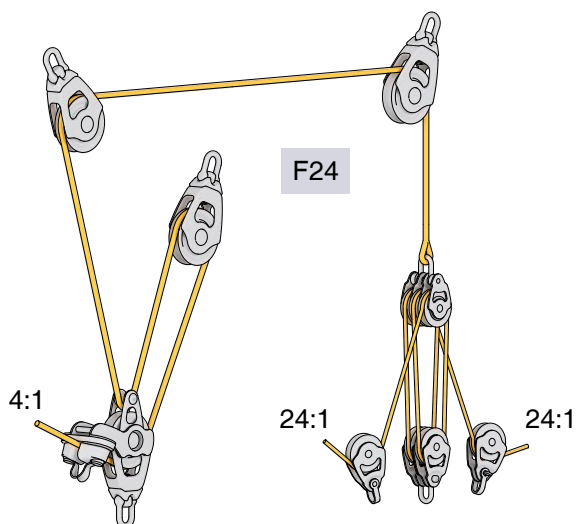

DOUBLE SPEED SYSTEM

TAB. G

G5

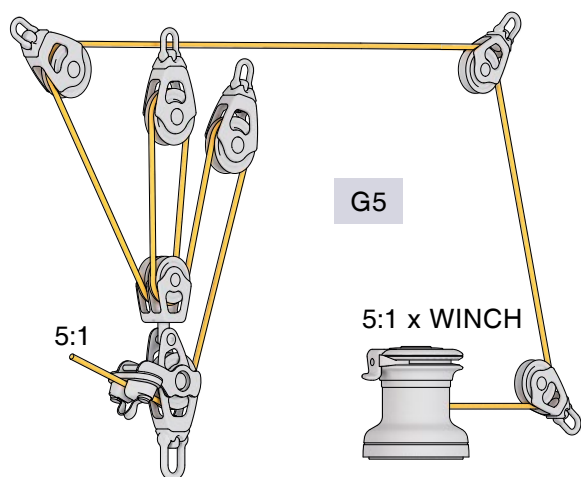

rigging loads

BREAKING LOADS

Reported “breaking loads” are “average values”: real values may vary greatly according to the supplier.

“Working loads” will be obtained with appropriate safety factors: 1/2 for steel wire, 1/4 for rope.

POLYESTER cover and core			
Ø mm.	BL kg	Ø inch	BL lb.
4	450	5/32	1000
5	600	3/16	1300
6	750	1/4	1650
8	1300	5/16	2850
10	2100	3/8	4600
12	2900	1/2	6400
14	3900	9/16	8600
16	5000	5/8	11000
18	6200	11/16	13600
20	7500	13/16	16500
22	9000	7/8	19800

POLYESTER (cover) DYNEEMA (core)			
Ø mm.	BL kg	Ø inch	BL lb.
4	700	5/32	1550
5	1000	3/16	2200
6	1800	1/4	3950
8	3000	5/16	6600
10	4600	3/8	10100
12	6600	1/2	14500
14	8900	9/16	19600
16	11000	5/8	24200

S. STEEL AISI 316 1 x 19			
Ø mm.	BL kg	Ø inch	BL lb.
3	800	1/8	1700
4	1400	5/32	3100
5	2100	3/16	4600
6	3100	1/4	6800
7	4100	9/32	9100
8	5200	5/16	11400
10	8000	3/8	17600
12	11000	1/2	24200
14	14500	9/16	31900
16	19000	5/8	41900
18	23500	11/16	51800

S. STEEL AISI 316 7 x 19			
Ø mm.	BL kg	Ø inch	BL lb.
3	550	1/8	1200
4	900	5/32	2000
5	1500	3/16	3300
6	2200	1/4	4800
7	2900	9/32	6400
8	3800	5/16	8400
10	6000	3/8	13200
12	8500	1/2	18700

BREAKING LOADS

Screws AISI 316 class 50

	TENSILE STRESS		SHEARING STRESS
	D mm	BL kg	
	5	1000	600
	6	1400	800
	8	2600	1500
	10	4000	2400
	12	5600	3300
	14	7600	4600

CONVERSION FACTOR


mm = inch x 25.4	inch = mm x 0.039
cm = inch x 2.54	inch = cm x 0.394
cm = ft x 30.48	ft = cm x 0.033
m = ft x 0.305	ft = m x 3.281
m² = ft² x 0.093	ft² = m² x 10.76
gr = oz. x 28.35	oz. = gr x 0.035
kg = lb x 0.454	lb = kg x 2.205

SWL is the abbreviation of **Safe Working Load**, it is half of the **Breaking Load (BL)**.


BLOCK LOADING

Block loading depends on the angle of the line.

Values for typical angles are reported in the table.

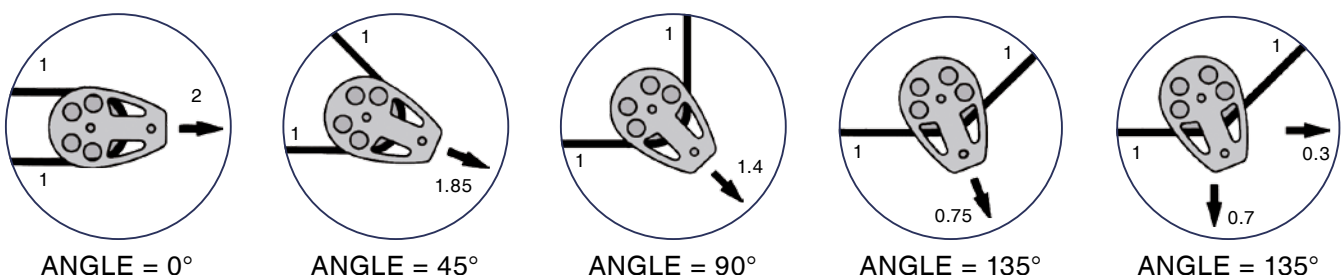

Paraglide

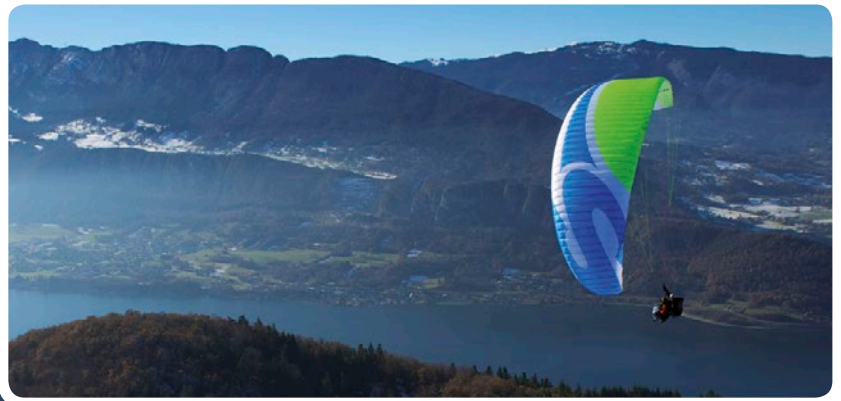

not only
for sailing



Kite



Tensostructure



Rescue



Arborist



model index

Model page

0

00301	51
00302	51
00303	51
00304	51
00305	51
00306	51
00311	51
00316	51
00320	51
00321	51
00322	51
00323	51
00324	51
00330	51
00331	51
003XX/C	50
003XX/SW	50
00401	52
00402	52
00403	52
00404	52
00405	52
00406	52
00411	52
00416	52
00418	86
00418/D	86
00420	52
00421	52
00422	52
00423	52
00424	52
00430	52
00431	52
004XX/C	50
004XX/SW	50
00501	56
00502	56
00503	56
00504	56
00505	56
00506	56
00507	56
00508	56
00509	56
00510	56
00511	57
00512	57
00513	57
00516	57
00517	57
00518	86
0051L	57
00520	55
005SS	182
00601	58
00602	58
00603	58
00604	58

Model page

00605	58
00606	58
00607	58
00608	58
00609	58
00610	58
00611	59
00612	59
00613	59
00614	59
00615	59
00616	59
00617	59
00618	86
0061L	59
00620	55
00621	85
00621/C	85
0062L	57
006HR	182
006SS	182
00701	60
00702	60
00703	60
00704	60
00705	60
00706	60
00707	60
00708	60
00709	60
00710	60
00711	61
00712	61
00713	61
00714	61
00715	61
00716	61
00717	61
00718	86
00718/Z	86
00720	55
00801	62
00802	62
00803	62
00807	62
00808	62
00809	62
00810	62
00811	62
00812	62
00813	62
00814	62
00815	62
00816	62
00818	86
00818/Z	86
0081L	62
00821	85
0082L	59
008HR	182
008SS	182

Model page

01001	63
01002	63
01003	63
01007	63
01008	63
01009	63
01010	63
01011	63
01012	63
01014	63
01015	63
01016	63
01018	86
01018/Z	86
0101L	63
01021	85
010HR	182
010SS	182
01201	64
01202	64
01209	64
01210	64
01211	64
01212	64
01214	64
01215	64
01216	64
01218	86
01218/Z	86
0121L	64
012HR	182
012SS	182
01401	65
01402	65
01409	65
01410	65
01411	65
01412	65
01414	65
01415	65
01418/Z	86
0141L	65
014HR	182
014SS	182
016HR	182
016SS	182
03411/M	50
03413/M	51
04013/M	50
04514/M	52
04819/F	54
05114/M	54
06016/F	54
06421/F	54
07016/F	54
08019/F	54

1

10021/F	54
12025/A	54
14025/A	54

Model page

15029/A	68
18035/A	68

2

2011	30
2012	30
2014	30
2021	30
2022	30
2023	30
2031	30
2032	30
2033	30
2121	31
2122	31
2123	31
21843/A	68
240.010	27
24856/A	68
251.035/AG	17
251.035/AR	17
251.035/QG	17
251.035/QR	17
251.035/SG	17
251.035/SR	17

4

4100	118
4101	118
4102	118
4102/SH	117
4103	118
4110	122
4110/D	128
4110/SH	120
4112	122
4113	122
4114	122
4118	139
4123	125
4124	125
4127	125
4150	120
4150/D	128
4150/SH	120
4153	123
4154	123
4155	123
4190	120
4190/D	128
4190/H	111
4190/SH	120
4194	124
4195	124
4196	124
4199	124
4260/H	111
4261	117
4262	117
4263	117
4264	117

Model page

4264/Z	119
4266	117
4271	121
4272	121
4273	121
4273/Z	126
4274	121
4274/G	127
4274/Z	125
4275	121
4275/Z	125
4276	121
4283	139
4290	121
4410	121
4410/Z	125
4420	121
4430	121
4510	120
4520	120
4523	139
4530	120
4540	120
4541	120
4550	120
4551	120
4601	119
4603	119
4623	127
4631	119
4633	119
4651	127
4654	127
4691	127
4694	127
4901	118
4902	118
4903	118
4904	118
4911	122
4913	122
4914	122
4915	122
4916	122
4921	125
4922	125
4925	125
4951	123
4952	123
4953	123
4954	123
4955	123
4991	124
4992	124
4993	124
4994	124
4995	124

5

500.110	37
500.120	37

Model.....	page	Model.....	page	Model.....	page	Model.....	page	Model.....	page
500.130	37	508.123	41	543.120	37	614.223	134	691.141	100
500.210	37	508.141	41	543.130	37	614.224	134	691.240/S	113
501.110	37	508.142	41	543.210	37	614.225	134	691.241	102
501.120	37	508.143	41	549.111	39	614.229	132	691.241/AL	102
501.130	37	508.161	41	549.111/H	39	614.232	135	691.241/B	102
501.210	37	508.162	41	549.112	39	614.233	135	691.241/S	102
502.011	46	508.163	41	549.112/H	39	614.235	135	691.242/S	112
502.022	46	509.111	39	549.113	39	614.236	135	691.243/S	112
502.033	46	509.111/H	39	549.113/H	39	614.239	132	691.244/S	112
502.22/37	46	509.112	39	549.121	39	615.222	137	691.341	104
505.081	43	509.112/H	39	549.122	39	615.223	137	691.341/AL	104
505.082	43	509.113	39	549.123	39	615.229	136	691.341/B	104
505.083	43	509.113/H	39	549.131	39	615.233	137	691.341/S	104
505.085	43	509.121	39	549.132	39	615.236	137	691.342/S	112
505.086	43	509.122	39	549.133	39	615.239	136	691.343/S	112
505.087	43	509.123	39	549.141	39	620.492	102	691.344/S	112
505.101	43	509.131	39	549.142	39	621.452	100	691.421	117
505.102	43	509.132	39	549.143	39	621.462	100	691.451	107
505.103	43	509.133	39			621.472	101	691.452	107
505.105	43	509.141	39			621.492	100	691.560	132
505.106	43	509.142	39			622.412	181	691.561	132
505.107	43	509.143	39			622.422	109	691.563	132
505.121	43	513.032	45			622.462	103	691.660	136
505.122	43	513.110	37			622.492	103	691.661	136
505.123	43	513.120	37			622.492/S	112	691.663	136
505.125	43	513.130	37			622.511/S	113	691.711/S	113
505.126	43	513.210	37			622.512/S	113	691.721/S	113
505.127	43	513/E	37			622.513/S	113	691.722/AL	104
505.141	43	513/F	37			622.523/S	113	691.722/S	106
505.142	43	513/I	37			623.120/AL	106	691.822	132
505.143	43	514.032	45			623.150/AL	106		
505.145	43	5154	126			623.180/AL	106		
505.146	43	515.032	45			623.180/S	106		
505.147	43	516.032	45			623.412	181		
505.161	43	5194	126			623.422	109		
505.162	43	5195	126			623.462	105		
505.163	43	522.022	46			623.492	104		
505.165	43	522.031	45			623.492/S	108		
505.166	43	522.140	46			623.511/S	113		
505.167	43	523.042	45			623.512/S	113		
505.181	43	523.052	45			623.513/S	113		
505.182	43	524.042	45			623.523/S	113		
505.183	43	524.052	45			624.422	109		
505.185	43	525.042	45			624.492	104		
505.186	43	525.052	45			625.492	103		
505.187	43	526.042	45			6320/12	29		
507.111	44	526.052	45			6320/24	29		
507.112	44	533.032	45			671.002	107		
507.113	44	534.032	45			671.003	107		
507.121	44	535.032	45			671.004	107		
507.122	44	536.032	45			672.002	110		
507.131	44	540.110	37			672.003	110		
507.132	44	540.120	37			672.004	110		
508.114	41	540.130	37			672.005	110		
508.116	41	540.210	37			690.151	100		
508.118	41	541.110	37			690.152	100		
508.120	41	541.120	37			690.251	103		
508.121	41	541.130	37			690.252	103		
508.122	41	541.210	37			690.351	105		
508.122/P	41	543.110	37			690.352	105		

6

601.121	117
601.123	132
601.123/R	132
601.124	136
601.221	117
601.223	132
602.112	108
602.112/B	108
602.112/S	108
602.113	108
602.113/B	108
602.113/S	108
602.211	108
602.211/B	108
602.212	108
602.212/B	107
602.212/S	108
602.213	108
602.213/B	107
602.213/S	108
602.312	108
602.312/SI	108
602.313	108
602.313/SI	108
609.320	164
609.321	164
609.322	164
609.323	165
609.324	165
609.325	165
609.326	165
609.327	164
610.340	165
610.341	165
614.210	133
614.212	133
614.213	133
614.214	133
614.219	132
614.222	134

7

7105	182
7106	182
7108	182
7110	182
7206	183
7208	183
7210	183
7212	183
7214	183
7216	183
7220	183
7306	183
7308	183
7310	183
7312	183
7314	183
7316	183
7320	183
7412	181
7413	181
7505	168
7506	168
7508	168
7510	168
7512	168
7514	168
7605	168
7606	168

model index

Model page

7608 168
7610 168
7612 168
7614 168

8

801.045 88
801.060 88
801.070 88
801.090 88
801.110 88
812.154 69
812.184 70
813.154 69
813.184 70
815.075 83
815.090 83
815.120 83
815.150 83
815.180 83
815.452 83
815.552 83
815.652 83
816.075 84
816.090 84
816.120 84
816.150 84
816.180 84
817.050 89
817.060 89
818.050 89
818.060 89
819.060 88
819.070 88
819.090 88
821.052 87
821.062 87
821.070 88
821.074 87
821.100 88
831.154 69
831.184 70
832.154 69
832.184 70
851.065 47
851.080 47
851.100 47
851.125 47
852.065 47
852.080 47
852.100 47
852.125 47

9

9001 53
9030 53
9031 53
9040 94
9060 94
908.095 96

Model page

908.125 96
909.502 103
909.552/S 112
910.155/Z 69
910.185 70
910.225 71
910.255 71
911.154 69
911.184 70
911.224 71
911.254 71
918.095 96
918.125 96
918.155 96
922.602 67
928.095 96
928.125 96
928.155 96
932.652 67
940.155/Z 69
940.185 70
940.225 71
940.255 71
941.154 69
941.184 70
941.224 71
941.254 71
949.502 103
949.552/S 112
971.452/C 67
981.154 69
991.073 90
991.093 90
991.124 90
991.154 90
991.184 90
992.602 67
993.652 67
994.055 90
994.065 90
994.075 90
994.085 90
994.095 90
994.125 90

A

A041 17
A071 17
A081 17
A121 17

B

BB4012 95
BB6014 95

C

C001 25
C002 25
C003 25
C004 25

Model page

C005 25
C006 25

D

D3008 171
D3610 171
D420 87
D430 87
D440 87
D450 87
D460 87
D520 87
D530 87
D540 87
D550 87
D560 87
D620 87
D630 87
D640 87
D650 87
D660 87
DBL44 92
DBL56 92
DBS04 92
DBS05 92
DBS44 92
DBS56 92

E

E6/60 66
E6/75 66
E7/60 66
E7/75 66
E8/60 66
E8/75 66

F

F4 67
F6 67
FB24.120 153
FB24.120D 154
FB24.120J 154
FB24.120JA 153
FB24.60D 152
FB24.60J 152
FB24.60S 152
FB24.90D 153
FB24.90J 153
FB29.11 160
FB29.12 160
FB29.13 160
FB29.150J 155
FB29.15 160
FB29.190 155
FB29.190D 155
FB29.190J 155
FB29.221 160
FB29.311 160
FB29.321 160
FB29.90S 155

Model page

/ F061 55
/ F071 55
/ F081 55
/ F101 55
/ F121 55

G

G201B 184
G202 184
G204 184
G205 184
G206/0 184
G207 184
G302 184

H

H020 91
H030 91
H040 91
H050 91
H130 91
H140 91
H150 91
H160 91
HK12 175
HK16 175
HS22.01 157
HS22.02 157
HS22.03 157
HS22.04R 156
HS22.05 157
HS22.05F 156
HS22.05R 156
HS22.06 162
HS22.08F 156
HS22.09 162
HS22.100JA/R 144
HS22.10F 156
HS22.110 145
HS22.11 156
HS22.12 156
HS22.12F 156
HS22.13 156
HS22.14F 156
HS22.15 156
HS22.161 163
HS22.16 162
HS22.17 163
HS22.185 163
HS22.221 156
HS22.222 156
HS22.311 156
HS22.312 156
HS22.321 156
HS22.322 156
HS22.330 157
HS22.40D 143
HS22.40D/R 143
HS22.40J 143
HS22.40J/R 143

Model page

HS22.40S 143
HS22.40S/R 143
HS22.44 143
HS22.46 143
HS22.49 143
HS22.50D 146
HS22.50D/R 144
HS22.50J 146
HS22.50J/R 144
HS22.50S 146
HS22.50S/R 144
HS22.60J/R 145
HS22.60T/R 145
HS22.70J/R 144
HS22.70JA/R 143
HS22.90J/R 145
HS24.04R 158
HS24.05F 158
HS24.06F 158
HS24.06R 158
HS24.08F 158
HS24.10F 158
HS24.110JA 146
HS24.11 158
HS24.12 158
HS24.12F 158
HS24.13 158
HS24.14F 158
HS24.15 158
HS24.16 162
HS24.221 158
HS24.222 158
HS24.311 158
HS24.312 158
HS24.321 158
HS24.322 158
HS24.50D 146
HS24.50J 146
HS24.50S 146
HS24.54 146
HS24.56 146
HS24.59 146
HS24.60J 147
HS24.60T 147
HS24.64 147
HS24.66 147
HS24.69 147
HS24.70J 148
HS24.70Q 148
HS24.74 148
HS24.76 148
HS24.79 148
HS24.90/DX 163
HS24.90/DY 163
HS30.01 159
HS30.02 159
HS30.03 159
HS30.05 159
HS30.09 162
HS30.110J 149

Model.....	page	Model.....	page	Model.....	page	Model.....	page	Model.....	page
HS30.116.....	149	LS2071.....	177	S		S1801.....	82	X	
HS30.11.....	159	LS2072.....	177	S0601.....	77	S1802.....	82	XT16.....	10
HS30.12.....	159	LS2080.....	177	S0602.....	77	S1811.....	82	XT16.2.....	10
HS30.130J.....	150	LS2081.....	177	S0603.....	77	S1812.....	82	XT16.2R.....	22
HS30.13.....	159	LS2082.....	177	S0604.....	77	S1814.....	82	XT16R.....	22
HS30.16.....	162	LS2100.....	177	S0605.....	77	S1815.....	82	XT30.....	10
HS30.313.....	159	LS2101.....	177	S0606.....	77	S1831.....	82	XT30.2.....	10
HS30.313/R.....	159	LS2102.....	177	S0609.....	77	S1832.....	82	XT30.2R.....	22
HS30.330.....	159	LS2120.....	75	S0611.....	77	SL4D.....	176	XT30R.....	22
HS30.70Q.....	149	LS2122.....	177	S0612.....	77	SL4S.....	176	XT40.....	10
HS30.70S.....	149	LS2140.....	75	S0613.....	77	SL4T.....	176	XT40EH.....	14
HS30.74.....	149	LS2142.....	177	S0614.....	77	SL5D.....	176	XT40R.....	22
HS30.76.....	149	/ L061.....	55	S0615.....	77	SL5S.....	176	XT44.....	10
HS30.79.....	149	/ L062.....	55	S0616.....	77	SL5T.....	176	XT44EH.....	14
HS30.90/DX.....	163	/ L071.....	55	S0620.....	77	T		XT44HD.....	18
HS30.90/DY.....	163	/ L072.....	55	S0701.....	78	T520.....	89	XT44R.....	22
HS30.90J.....	149	/ L081.....	55	S0702.....	78	T530.....	89	XT48.....	10
HS30.90Q.....	150	/ L101.....	55	S0703.....	78	T540.....	89	XT48EH.....	14
J		P		S0704.....	78	T550.....	89	XT48HD.....	18
JB06.....	131	P10.20.....	162	S0705.....	78	T560.....	89	XT48R.....	22
JB08.....	131	P14.25.....	162	S0706.....	78	T620.....	89	XT52.....	10
JB10.....	131	P14.35.....	162	S0711.....	78	T630.....	89	XT52.3RD.....	23
JB12.....	131	R		S0712.....	78	T6315/12.....	17	XT52EH.....	14
JB14.....	131	R07.05.....	172	S0713.....	78	T6315/24.....	17	XT52HD.....	18
K		R07.05/P.....	184	S0714.....	78	T640.....	89	XT52R.....	22
KITWINCHXT.....	4	R10.07.....	172	S0715.....	78	T6415/24.....	17	XT62.....	10
L		R10.07/P.....	184	S0720.....	78	T650.....	89	XT62.3.....	11
LD1000.....	28	R12.25.....	170	S0731.....	78	T660.....	89	XT62.3EH.....	14
LD1500.....	28	R14.10.....	172	S0732.....	78	TB4212.....	95	XT62.3HD.....	18
LD700.....	28	R14.10/P.....	184	S0901.....	79	TFL400.....	4	XT62.3R.....	23
LL046.....	93	R14.14.....	170	S0902.....	79	TL22.32.....	169	XT62.3RD.....	23
LL054.....	93	R14.14/S.....	170	S0903.....	79	TL28.40.....	169	XT62EH.....	14
LL1080.....	72	R18.36.....	170	S0904.....	79	TT22.32.....	169	XT62HD.....	18
LS046.....	93	R20.14.....	172	S0905.....	79	TT28.40.....	169	XT62R.....	22
LS054.....	93	R20.14/P.....	184	S0906.....	79	W		XT66.....	11
LS1060.....	74	R20.20.....	170	S0911.....	79	W16.....	7	XT66.3.....	11
LS1061.....	74	R20.20/S.....	170	S0912.....	79	W30.....	7	XT66.3EH.....	15
LS1062.....	74	R28.20.....	172	S0914.....	79	W42.....	7	XT66.3EV.....	16
LS1063.....	74	R30.56.....	173	S0915.....	79	W44.....	7	XT66.3HD.....	19
LS1070.....	74	R34.64.....	173	S0931.....	79	W48.....	7	XT66.3R.....	23
LS1071.....	74	R38.28.....	172	S0932.....	79	W52.....	7	XT66EH.....	15
LS1072.....	74	R3.14.....	171	S1201.....	80	W5.....	6	XT66EV.....	16
LS1073.....	74	R40.76.....	173	S1202.....	80	W6.....	6	XT66HD.....	19
LS1077.....	74	R4.14.....	171	S1203.....	80	W7.....	6	XT66R.....	22
LS1080.....	74	R50.94.....	173	S1204.....	80	W80.3ELH.....	21	XT70.....	11
LS1081.....	74	R5.14.....	171	S1211.....	80	W80.3ELV.....	21	XT70.3.....	11
LS1082.....	74	R6.14.....	171	S1212.....	80	W80.3HD.....	20	XT70.3EH.....	15
LS1083.....	74	RC230.....	180	S1214.....	80	W80.3HD.....	20	XT70.3EV.....	16
LS1100.....	75	RC290.....	180	S1215.....	80	W80.3ST.....	20	XT70.3HD.....	19
LS1101.....	75	RC350.....	180	S1231.....	80	W8.....	6	XT70.3R.....	23
LS1120.....	75	RC420.....	180	S1232.....	80	W90.3ELH.....	21	XT70EH.....	15
LS1121.....	75	RL3.0.....	174	S1501.....	81	W90.3ELV.....	21	XT70EV.....	16
LS1140.....	75	RL4.0.....	174	S1502.....	81	W90.3HD.....	20	XT70HD.....	19
LS1141.....	75	RL4.5.....	174	S1511.....	81	W90.3ST.....	20	XT70R.....	22
LS2060.....	177	RL5.0.....	174	S1512.....	81	/ W051.....	55	XT80.3.....	11
LS2061.....	177	RL6.0.....	174	S1514.....	81	/ W061.....	55	XT80.3EH.....	15
LS2062.....	177	RL6.1.....	174	S1515.....	81	/ W071.....	55	XT80.3EV.....	16
LS2070.....	177			S1531.....	81	/ W081.....	55	XT80.3HD.....	19
				S1532.....	81	/ W101.....	55		



LIMITED WARRANTY

Antal guarantees its equipment to be free of defects in material and workmanship for 3 years from the date of purchase. During this period defective parts will be repaired or replaced by Antal.

Warranty does not cover:

- products incorrectly installed;
- products used in applications for which they are not intended;
- products used under loads exceeding the product's stated loads;
- products not properly maintained.

Warranty does not cover defects due to corrosion, U-V degradation, and normal wear and tear.

Products subject to warranty claim will be returned to Antal for examination and possible repairing or replacement. Antal is not responsible for installation or shipping costs.

MAINTENANCE

Remove salt deposits with fresh water; frequently washing will avoid corrosion that is activated from salt water.

Grease (TFL 400) or Loctite or anticorrosive product will protect aluminium; it will be useful to use some grease on s. steel parts: screws, washers, pin to reduce the contact with aluminium.

Although all Antal products are made only with anti U-V plastic it will be better to reduce the exposure to sunlight.



SOLAR PLANT

The new Antal photovoltaic solar plant with a surface of 500 m² and a power of 20 kw will supply 20% of the energy necessary for the production. Our passion for sailing is also care for the environment.


antal

What we are skilful in, is mechanic.

What we are keen on, is the beauty of a silent sailing-boat in the wind: that's why we make sailing equipment in the best possible way, so that you can find in our products the high level of our job.




Anitra 12m SI - Martin Yacht



ARGENTINA

C.D.S.N. PABLO MONSEGUR
Tel.: +54 11-47456022
Mob.: +54 911-59058222
Email: infomastiles@gmail.com




AUSTRALIA

INTERNATIONAL SAILFORCE PTY LTD
Tel.: +61 8-94372211
Email: info@sailforce.com.au




CARIBBEAN

FKG MARINE RIGGING NV
Tel.: +1 721-5444733
Tel.: +1 721-5445691
Email: info@fkg-marine-rigging.com




FRANCE

XPO ANTAL FRANCE
Tel.: +33 5464-52582
Fax: +33 5464-48178
Email: xphelipon@xporganisation.fr




GERMANY

PFEIFFER MARINE GMBH
Tel.: +49 7732-99500
Fax: +49 7732-995050
Email: info@pfeiffer-marine.de



GREECE

MELTEMI YACHT RIGGING LTD
Tel.: +30 210-9849983
Fax: +30 210-9844356
Email: info@meltemi-yachting.gr



HOLLAND

ALLPA BV
Tel.: +31 24-377-77-73
Fax: +31 24-377-77-70
Email: info@allpa.nl

HOLLAND

A+ RIGGING NEDERLAND BV
Tel.: +31 227-544096
Fax: +31 227-544158
Email: bram@aplusrigging.nl

HONG KONG

STORM FORCEMARINE LTD
Tel.: +852 2866-0114
Fax: +852 2866-9260
Email: sales@stormforcemarine.com

MALTA

SEALINK MARINE CENTRE
Tel.: +356 213-15505
Fax: +356 213-15506
Email: info@sealinkmarine.com

NEW ZEALAND

HALL SPARS NZ LTD
Tel.: +64 9-4275472
Fax: +64 9-4275757
Email: infonz@hallspars.com

POLAND

TAURUS SEA POWER LTD
Tel.: +48 58-3443050
Fax: +48 58-3416762
Email: taurus@taurus.gda.pl

SOUTH AFRICA

MANEX & POWER MARINE LTD
Tel.: +27 21-5117292
Fax: +27 21-5101487
Email: manex@manex.co.za

SPAIN

TACK VELAS S.L.
Tel.: +34 93-2218212
Mob.: +34 620388754
Email: info@tackvelas.com

THAILAND

EAST MARINE CO. LTD
Tel.: +66 76-239113
Mob.: +66 8-10823113
Email: sales@eastmarineasia.com

TURKEY

BARAN MAKINA
Tel.: +90 216-3499024
Fax: +90 216-3499025
Email: mail@baran-group.com

UNITED KINGDOM

MARINEWARE LTD
Tel.: +44 2380-624555
Fax: +44 2380-624559
Email: sales@marineware.com

U.S.A.

EURO MARINE TRADING INC.
Tel.: +1 401-8490060
Fax: +1 401-8493230
Email: info@euromarinetrading.com

antal